

# FFH130<sup>ET</sup>

LONG HAUL STEER

**FORTUNE**  
TIRES

**EXPECT  
MORE**

## FEATURES & BENEFITS:

- Higher load index and 16-ply rating engineered to handle heavy tractors with ease
- Continuous shoulder and decoupling grooves provide even-wear over extended miles
- Innovative groove siping and stone ejectors prevent irregular wear and protect the casing from stone drilling
- Reinforced defensive ribs in the outer grooves help maintain even-wear and resist damage
- EPA SmartWay® verified



## WARRANTY INFO

All Fortune TBR tires come with a 7-Year/3-Retread Limited Warranty

Contact Your Sales Rep.  
[info@prinx.us.com](mailto:info@prinx.us.com)  
Prinx Chengshan Tire North America, Inc.  
[fortunetireusa.com](http://fortunetireusa.com)

| TIRE SIZE   | PLY RATING | LOAD RANGE | LOAD SPEED INDEX | TREAD DEPTH (32ND) | MAX LOAD SINGLE (LBS) | MAX PRESSURE SINGLE (PSI) | MAX LOAD DUAL (LBS) | MAX PRESSURE DUAL (PSI) | APPROVED RIM WIDTH | O.D. (IN) | S.W. (IN) | REVS/ MILE | WEIGHT (LBS) | TREAD CONSTRUCTION |
|-------------|------------|------------|------------------|--------------------|-----------------------|---------------------------|---------------------|-------------------------|--------------------|-----------|-----------|------------|--------------|--------------------|
| 11R22.5     | 14PR       | G          | 144/142L         | 20                 | 6175                  | 105                       | 5840                | 105                     | 7.50, 8.25         | 41.5      | 11.0      | 486        | 120          | 1S+4S              |
| 11R22.5     | 16PR       | H          | 146/143L         | 20                 | 6610                  | 120                       | 6005                | 120                     | 7.50, 8.25         | 41.5      | 11.0      | 486        | 115          | 1S+4S              |
| 11R24.5     | 14PR       | G          | 146/143L         | 20                 | 6610                  | 105                       | 6005                | 105                     | 7.50, 8.25         | 43.5      | 11.0      | 464        | 124          | 1S+4S              |
| 11R24.5     | 16PR       | H          | 149/146L         | 20                 | 7160                  | 120                       | 6610                | 120                     | 7.50, 8.25         | 43.5      | 11.0      | 464        | 124          | 1S+4S              |
| 295/75R22.5 | 14PR       | G          | 144/141L         | 19                 | 6175                  | 110                       | 5675                | 110                     | 8.25, 9.00         | 39.9      | 11.7      | 505        | 112          | 1S+4S              |
| 295/75R22.5 | 16PR       | H          | 149/146L         | 19                 | 7160                  | 123                       | 6610                | 123                     | 8.25, 9.00         | 39.9      | 11.7      | 505        | 112          | 1S+4S              |


Choose our **FFH130<sup>ET</sup>** enhanced long haul steer tire for unmatched performance, durability and environmental responsibility.

Enhanced Continuous Shoulder

Decoupling Groove

Reinforced Defensive Ribs

Groove Siping & Stone Ejectors

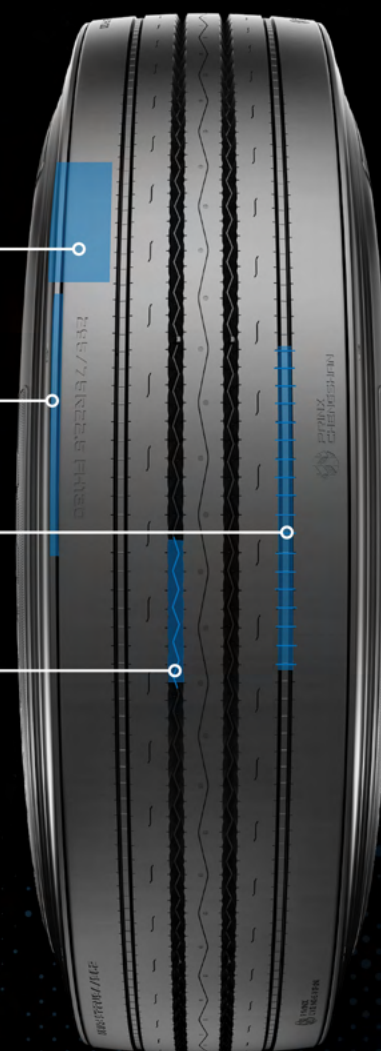

**MORE sizes. MORE options. MORE with Fortune.**

Scan To See Our  
Full Lineup  
[fortunetireusa.com](https://www.fortunetireusa.com)

Follow Us On Social  
[@fortunetiresusa](https://twitter.com/fortunetiresusa)



# FAR602<sup>ET</sup>

## REGIONAL ALL-POSITION PREMIUM 5-RIB

**FORTUNE**  
TIRES

**EXPECT  
MORE**

### FEATURES & BENEFITS:

- Solid-shoulder design prevents irregular wear and improves mileage
- New 5-rib and 4-groove design maximizes water evacuation
- Stone ejectors to protect the casing for retreading
- Optimized bead bundle to reduce wear, reduce chafing and improve durability
- 4-belt construction for casing durability and retreading
- EPA SmartWay® verified



### WARRANTY INFO

All Fortune TBR tires come with a 7-Year/3-Retread Limited Warranty

Contact Your Sales Rep.  
[info@prinx.us.com](mailto:info@prinx.us.com)  
Prinx Chengshan Tire North America, Inc.  
[fortunetireusa.com](http://fortunetireusa.com)

| TIRE SIZE    | PLY RATING | LOAD RANGE | LOAD SPEED INDEX | TREAD DEPTH (32ND) | MAX LOAD SINGLE (LBS) | MAX PRESSURE SINGLE (PSI) | MAX LOAD DUAL (LBS) | MAX PRESSURE DUAL (PSI) | APPROVED RIM WIDTH | O.D. (IN) | S.W. (IN) | REVS/ MILE | WEIGHT (LBS) | TREAD CONSTRUCTION |
|--------------|------------|------------|------------------|--------------------|-----------------------|---------------------------|---------------------|-------------------------|--------------------|-----------|-----------|------------|--------------|--------------------|
| 10R22.5      | 14PR       | G          | 141/139L         | 18                 | 5675                  | 115                       | 5355                | 115                     | 6.75, 7.50, 8.25   | 40.1      | 10.3      | 503        | 100          | 1S+4S              |
| 11R22.5*     | 14PR       | G          | 144/142L         | 18                 | 6175                  | 105                       | 5840                | 105                     | 7.50, 8.25         | 41.5      | 11.0      | 486        | 111          | 1S+4S              |
| 11R22.5*     | 16PR       | H          | 146/143L         | 18                 | 6610                  | 120                       | 6005                | 120                     | 7.50, 8.25         | 41.5      | 11.0      | 486        | 111          | 1S+4S              |
| 11R24.5*     | 14PR       | G          | 146/143L         | 18                 | 6610                  | 105                       | 6005                | 105                     | 7.50, 8.25         | 43.5      | 11.0      | 464        | 120          | 1S+4S              |
| 11R24.5*     | 16PR       | H          | 149/146L         | 18                 | 7160                  | 120                       | 6610                | 120                     | 7.50, 8.25         | 43.5      | 11.0      | 464        | 120          | 1S+4S              |
| 215/75R17.5  | 16PR       | H          | 135/133L         | 15                 | 4805                  | 125                       | 4540                | 125                     | 6.00, 6.75         | 30.2      | 8.3       | 668        | 58           | 1S+4S              |
| 235/75R17.5  | 18PR       | J          | 143/141J         | 15                 | 6005                  | 125                       | 5675                | 125                     | 6.75, 7.50         | 31.4      | 9.2       | 643        | 66           | 1S+4S              |
| 245/70R17.5  | 18PR       | J          | 136/134M         | 17                 | 4940                  | 125                       | 4675                | 125                     | 6.75, 7.50         | 30.9      | 10.0      | 652        | 69           | 1S+4S              |
| 245/70R17.5  | 18PR       | J          | 143/141J         | 17                 | 6005                  | 125                       | 5675                | 125                     | 6.75, 7.50         | 30.9      | 10.0      | 652        | 69           | 1S+4S              |
| 225/70R19.5^ | 12PR       | F          | 125/123N         | 15                 | 3640                  | 95                        | 3415                | 95                      | 6.00, 6.75         | 32.0      | 8.9       | 632        | 65           | 1S+3S              |
| 225/70R19.5^ | 14PR       | G          | 128/126N         | 15                 | 3970                  | 110                       | 3750                | 110                     | 6.00, 6.75         | 32.0      | 8.9       | 632        | 65           | 1S+3S              |
| 245/70R19.5  | 14PR       | G          | 133/131N         | 16                 | 4540                  | 110                       | 4300                | 110                     | 6.75, 7.50         | 33.1      | 10.0      | 611        | 73           | 1S+4S              |
| 245/70R19.5  | 16PR       | H          | 136/134N         | 16                 | 4940                  | 120                       | 4675                | 120                     | 6.75, 7.50         | 33.1      | 10.0      | 611        | 73           | 1S+4S              |
| 265/70R19.5  | 14PR       | G          | 137/134M         | 18                 | 5070                  | 110                       | 4675                | 110                     | 7.50, 8.25         | 34.5      | 10.3      | 591        | 82           | 1S+4S              |
| 255/70R22.5  | 16PR       | H          | 140/137M         | 17                 | 5510                  | 120                       | 5070                | 120                     | 7.50, 8.25         | 36.6      | 11.0      | 551        | 85           | 1S+4S              |
| 275/70R22.5  | 18PR       | J          | 148/145L         | 18                 | 6940                  | 130                       | 6390                | 130                     | 8.25, 9.00         | 37.7      | 10.9      | 535        | 107          | 1S+4S              |
| 295/75R22.5* | 14PR       | G          | 144/141L         | 18                 | 6175                  | 110                       | 5675                | 110                     | 8.25, 9.00         | 39.9      | 11.7      | 505        | 107          | 1S+4S              |
| 295/75R22.5* | 16PR       | H          | 146/143L         | 18                 | 6610                  | 120                       | 6005                | 120                     | 8.25, 9.00         | 39.9      | 11.7      | 505        | 107          | 1S+4S              |
| 285/75R24.5* | 14PR       | G          | 144/141L         | 18                 | 6175                  | 110                       | 5675                | 110                     | 7.50, 8.25, 9.00   | 41.3      | 11.2      | 505        | 112          | 1S+4S              |
| 285/75R24.5* | 16PR       | H          | 147/144L         | 18                 | 6780                  | 120                       | 6175                | 120                     | 7.50, 8.25, 9.00   | 41.3      | 11.2      | 505        | 112          | 1S+4S              |

\* EPA SmartWay® verified

^ 3-belt construction

Harnessing the power of special compounds, the Fortune **FAR602<sup>ET</sup>** tire boasts low heat generation, resulting in improved mileage and optimal fuel efficiency. EPA SmartWay® verified in \*sizes for eco-friendly performance.




Optimized Bead Bundle

Solid-Shoulder Design

Unique Siping Design For Superior Grip, Control And Performance

Stone Ejectors

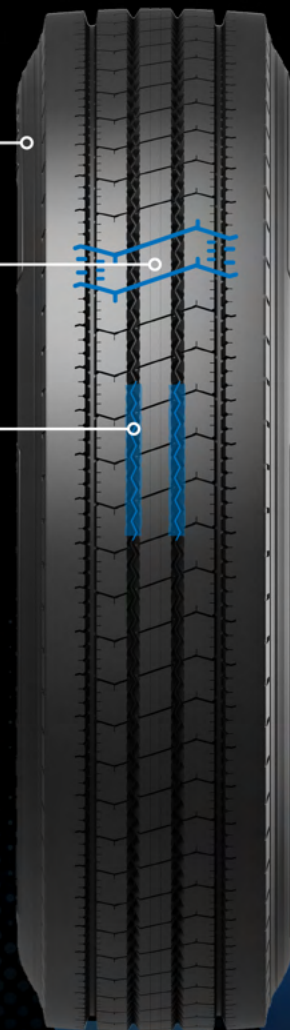

**MORE sizes. MORE options. MORE with Fortune.**

Scan To See Our Full Lineup  
[fortunetireusa.com](http://fortunetireusa.com)

Follow Us On Social  
[@fortunetiresusa](https://www.instagram.com/fortunetiresusa)



# FAR603

## LONG HAUL COACH BUS STEER ALL-POSITION

**FORTUNE**  
TIRES

# EXPECT MORE

### FEATURES & BENEFITS:

- 75 mph L speed rating
- Multi-angle grooves for better tread rigidity and lower rolling noise
- Optimized rib width for even-wear
- Wear indicators on the shoulder ribs help identify alignment issues
- Smart "Movematic" sipes close when rolling through the footprint, allowing the tread blocks to interlock and make the tread stiffer
- 3-Peak Mountain Snowflake rated for all-weather conditions for enhanced performance in snow and cold weather to shorten wet braking distance
- Optimized casing design for superior retreadability



### WARRANTY INFO

All Fortune TBR tires come with a 7-Year/3-Retread Limited Warranty


Contact Your Sales Rep.  
[info@prinx.us.com](mailto:info@prinx.us.com)  
Prinx Chengshan Tire North America, Inc.  
[fortunetireusa.com](http://fortunetireusa.com)

| TIRE SIZE   | PLY RATING | LOAD RANGE | LOAD SPEED INDEX | TREAD DEPTH (32ND) | MAX LOAD SINGLE (LBS) | MAX PRESSURE SINGLE (PSI) | MAX LOAD DUAL (LBS) | MAX PRESSURE DUAL (PSI) | APPROVED RIM WIDTH | O.D. (IN) | S.W. (IN) | REVS/ MILE | WEIGHT (LBS) | TREAD CONSTRUCTION |
|-------------|------------|------------|------------------|--------------------|-----------------------|---------------------------|---------------------|-------------------------|--------------------|-----------|-----------|------------|--------------|--------------------|
| 315/80R22.5 | 20PR       | L          | 161/157L         | 21                 | 10000                 | 130                       | 9090                | 130                     | 9.00, 9.75         | 42.4      | 12.3      | 476        | 145.04       | 1S+4S              |

Wear Indicators On The Shoulder Ribs Help Identify Alignment Issues

Multi-Angle Grooves For Better Tread Rigidity

Smart "Movematic" Sipes Close When Rolling Through the Footprint To Make The Tread Stiffer

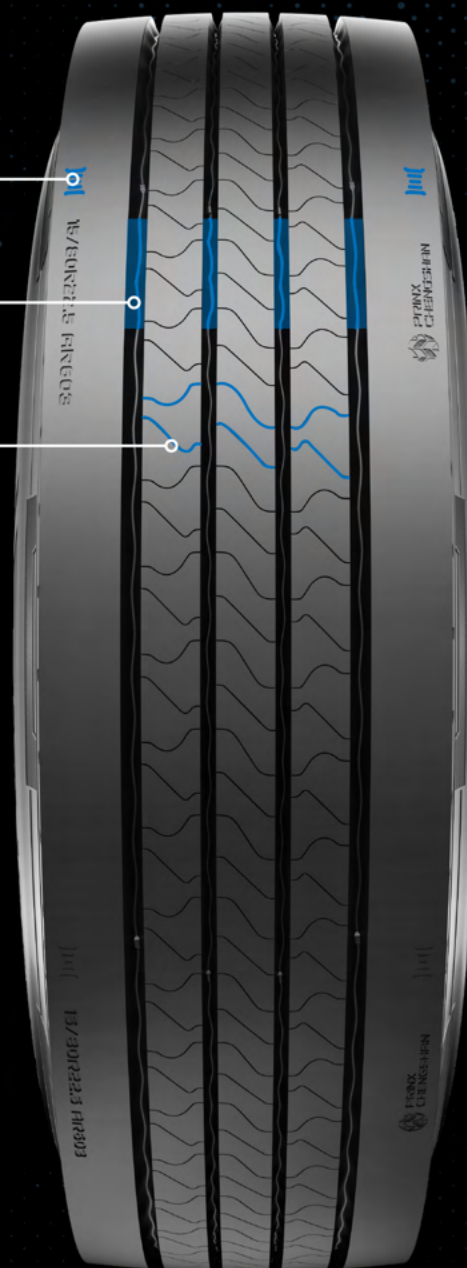

The **FAR603** is a long-lasting, high-mileage all-position tire that offers great stability and precise steering performance. With a 75 mph speed rating, it's ideal for bus/motor coach applications in highway conditions, even in challenging weather.



**MORE sizes. MORE options. MORE with Fortune.**

Scan To See Our  
Full Lineup  
[fortunetireusa.com](https://www.fortunetireusa.com)

Follow Us On Social  
[@fortunetiresusa](https://twitter.com/fortunetiresusa)



# FDH106<sup>ET</sup>

LONG HAUL CLOSED SHOULDER DRIVE

**FORTUNE**  
TIRES

**EXPECT  
MORE**

## FEATURES & BENEFITS:

- Optimized block design for enhanced traction and longer mileage
- Closed shoulder design promotes even shoulder wear and longer mileage
- Stone ejectors to protect the casing for retreading
- Optimized sipes enhance starting and braking
- 4-belt construction for casing durability and retreading
- 30/32nds tread depth
- EPA SmartWay® verified



## WARRANTY INFO

All Fortune TBR tires come with a 7-Year/3-Retread Limited Warranty

Contact Your Sales Rep.  
[info@prinx.us.com](mailto:info@prinx.us.com)  
Prinx Chengshan Tire North America, Inc.  
[fortunetireusa.com](http://fortunetireusa.com)

| TIRE SIZE   | PLY RATING | LOAD RANGE | LOAD SPEED INDEX | TREAD DEPTH (32ND) | MAX LOAD SINGLE (LBS) | MAX PRESSURE SINGLE (PSI) | MAX LOAD DUAL (LBS) | MAX PRESSURE DUAL (PSI) | APPROVED RIM WIDTH       | O.D. (IN) | S.W. (IN) | REVS/ MILE | WEIGHT (LBS) | TREAD CONSTRUCTION |
|-------------|------------|------------|------------------|--------------------|-----------------------|---------------------------|---------------------|-------------------------|--------------------------|-----------|-----------|------------|--------------|--------------------|
| 11R22.5     | 14PR       | G          | 144/142L         | 30                 | 6175                  | 105                       | 5840                | 105                     | 7.50, <b>8.25</b>        | 41.5      | 11.0      | 486        | 134          | 1S+4S              |
| 11R22.5     | 16PR       | H          | 146/143L         | 30                 | 6610                  | 120                       | 6005                | 120                     | 7.50, <b>8.25</b>        | 41.5      | 11.0      | 486        | 134          | 1S+4S              |
| 11R24.5     | 14PR       | G          | 146/143L         | 30                 | 6610                  | 105                       | 6005                | 105                     | 7.50, <b>8.25</b>        | 43.5      | 11.0      | 464        | 142          | 1S+4S              |
| 11R24.5     | 16PR       | H          | 149/146L         | 30                 | 7160                  | 120                       | 6610                | 120                     | 7.50, <b>8.25</b>        | 43.5      | 11.0      | 464        | 142          | 1S+4S              |
| 295/75R22.5 | 14PR       | G          | 144/141L         | 30                 | 6175                  | 110                       | 5675                | 110                     | 8.25, <b>9.00</b>        | 40.2      | 11.7      | 505        | 128          | 1S+4S              |
| 295/75R22.5 | 16PR       | H          | 146/143L         | 30                 | 6610                  | 120                       | 6175                | 120                     | 8.25, <b>9.00</b>        | 40.2      | 11.7      | 505        | 128          | 1S+4S              |
| 285/75R24.5 | 14PR       | G          | 144/141L         | 30                 | 6175                  | 110                       | 5675                | 110                     | 7.50, <b>8.25</b> , 9.00 | 41.6      | 11.1      | 505        | 133          | 1S+4S              |
| 285/75R24.5 | 16PR       | H          | 147/144L         | 30                 | 6780                  | 120                       | 6175                | 120                     | 7.50, <b>8.25</b> , 9.00 | 41.6      | 11.1      | 505        | 133          | 1S+4S              |

Optimized Block Design

Closed Shoulder For The Long Haul

Optimized Siping



With a generous 30/32nds tread depth, the **FDH106<sup>ET</sup>** is built for the long haul. Expect exceptional tread life and consistent performance, mile after mile.



**MORE sizes. MORE options. MORE with Fortune.**

Scan To See Our  
Full Lineup  
[fortunetireusa.com](https://fortunetireusa.com)

Follow Us On Social  
[@fortunetiresusa](https://twitter.com/fortunetiresusa)



# FDH131

**SUPER-REGIONAL LONG HAUL  
CLOSED SHOULDER DRIVE**

**FORTUNE**  
TIRES

**EXPECT  
MORE**

## FEATURES & BENEFITS:

- Designed for high-speed performance, longer mileage and minimized shoulder wear
- Specially designed pattern block shape and optimized footprint improves tire grip and traction
- Unique tread grooves for stress reduction and stone ejection
- 4-belt construction for casing durability and retreading
- Unique siping for better heat dispersion and enhanced traction



**M+S**

**7  
Years**

**3  
Retread**

## WARRANTY INFO

All Fortune TBR tires come with a 7-Year/3-Retread Limited Warranty


Contact Your Sales Rep.  
[info@prinx.us.com](mailto:info@prinx.us.com)  
Prinx Chengshan Tire North America, Inc.  
[fortunetireusa.com](http://fortunetireusa.com)

| TIRE SIZE   | PLY RATING | LOAD RANGE | LOAD SPEED INDEX | TREAD DEPTH (32ND) | MAX LOAD SINGLE (LBS) | MAX PRESSURE SINGLE (PSI) | MAX LOAD DUAL (LBS) | MAX PRESSURE DUAL (PSI) | APPROVED RIM WIDTH | O.D. (IN) | S.W. (IN) | REVS/ MILE | WEIGHT (LBS) | TREAD CONSTRUCTION |
|-------------|------------|------------|------------------|--------------------|-----------------------|---------------------------|---------------------|-------------------------|--------------------|-----------|-----------|------------|--------------|--------------------|
| 11R22.5     | 14PR       | G          | 144/142L         | 27                 | 6175                  | 105                       | 5840                | 105                     | 7.50, <b>8.25</b>  | 41.5      | 11.0      | 486        | 122          | 1S+4S              |
| 11R22.5     | 16PR       | H          | 146/143L         | 27                 | 6610                  | 120                       | 6005                | 120                     | 7.50, <b>8.25</b>  | 41.5      | 11.0      | 486        | 122          | 1S+4S              |
| 11R24.5     | 14PR       | G          | 146/143L         | 27                 | 6610                  | 105                       | 6005                | 105                     | 7.50, <b>8.25</b>  | 43.5      | 11.0      | 464        | 130          | 1S+4S              |
| 11R24.5     | 16PR       | H          | 149/146L         | 27                 | 7160                  | 120                       | 6610                | 120                     | 7.50, <b>8.25</b>  | 43.5      | 11.0      | 464        | 130          | 1S+4S              |
| 295/75R22.5 | 14PR       | G          | 144/141L         | 28                 | 6175                  | 110                       | 5675                | 110                     | 8.25, <b>9.00</b>  | 40.0      | 11.7      | 505        | 116          | 1S+4S              |
| 295/75R22.5 | 16PR       | H          | 146/143L         | 28                 | 6610                  | 120                       | 6005                | 120                     | 8.25, <b>9.00</b>  | 40.0      | 11.7      | 505        | 116          | 1S+4S              |

Optimized Footprint And  
Pattern Block Shape

Unique Siping

Unique Tread Grooves For Stress  
Reduction And Stone Ejection

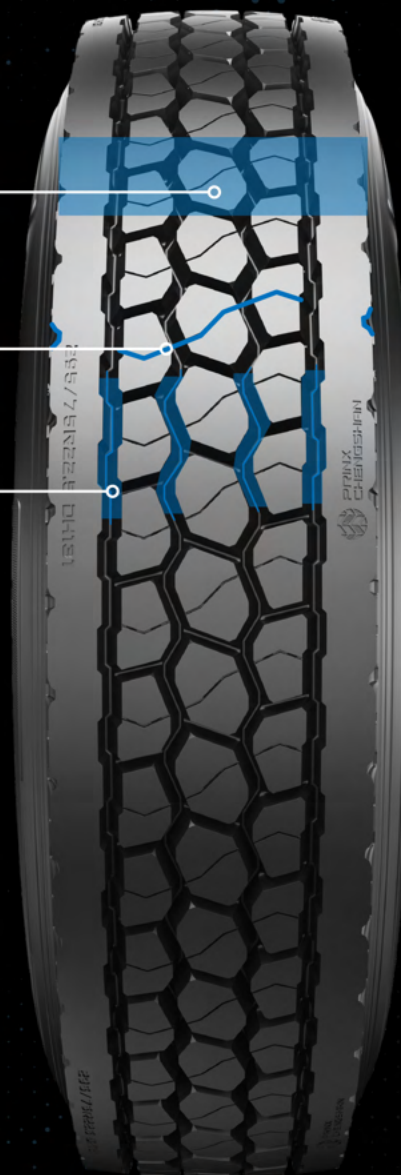

The **FDH131** super-regional drive is the ultimate value choice for closed shoulder regional highway applications.



**MORE sizes. MORE options. MORE with Fortune.**

Scan To See Our  
Full Lineup  
[fortunetireusa.com](https://www.fortunetireusa.com)

Follow Us On Social  
[@fortunetiresusa](https://twitter.com/fortunetiresusa)



# FDR601<sup>ET</sup>

## REGIONAL OPEN SHOULDER DRIVE

**FORTUNE**  
TIRES



# EXPECT MORE



### FEATURES & BENEFITS:

- Open shoulder design provides extra traction
- Tie-bar linked tread blocks prevent irregular wear
- Unique siping helps maintain block rigidity
- 4-belt construction for casing durability and retreading
- EPA SmartWay® verified



M+S

7  
Years

3  
Retread

### WARRANTY INFO

All Fortune TBR tires come with a 7-Year/3-Retread Limited Warranty

Contact Your Sales Rep.  
[info@prinx.us.com](mailto:info@prinx.us.com)  
Prinx Chengshan Tire North America, Inc.  
[fortunetireusa.com](http://fortunetireusa.com)

| TIRE SIZE    | PLY RATING | LOAD RANGE | LOAD SPEED INDEX | TREAD DEPTH (32ND) | MAX LOAD SINGLE (LBS) | MAX PRESSURE SINGLE (PSI) | MAX LOAD DUAL (LBS) | MAX PRESSURE DUAL (PSI) | APPROVED RIM WIDTH       | O.D. (IN) | S.W. (IN) | REVS/ MILE | WEIGHT (LBS) | TREAD CONSTRUCTION |
|--------------|------------|------------|------------------|--------------------|-----------------------|---------------------------|---------------------|-------------------------|--------------------------|-----------|-----------|------------|--------------|--------------------|
| 11R22.5*     | 14PR       | G          | 144/142L         | 27                 | 6175                  | 105                       | 5840                | 105                     | 7.50, <b>8.25</b>        | 41.5      | 11.0      | 486        | 119          | 1S+4S              |
| 11R22.5*     | 16PR       | H          | 146/143L         | 27                 | 6610                  | 120                       | 6005                | 120                     | 7.50, <b>8.25</b>        | 41.5      | 11.0      | 486        | 119          | 1S+4S              |
| 11R24.5*     | 14PR       | G          | 146/143L         | 27                 | 6610                  | 105                       | 6005                | 105                     | 7.50, <b>8.25</b>        | 43.5      | 11.0      | 464        | 127          | 1S+4S              |
| 11R24.5*     | 16PR       | H          | 149/146L         | 27                 | 7160                  | 120                       | 6610                | 120                     | 7.50, <b>8.25</b>        | 43.5      | 11.0      | 464        | 127          | 1S+4S              |
| 225/70R19.5^ | 14PR       | G          | 128/126N         | 19                 | 3970                  | 110                       | 3750                | 110                     | 6.00, <b>6.75</b>        | 32.0      | 8.9       | 632        | 65           | 1S+3S              |
| 245/70R19.5  | 14PR       | G          | 133/131N         | 19                 | 4540                  | 110                       | 4300                | 110                     | 6.75, <b>7.50</b>        | 33.1      | 9.8       | 611        | 73           | 1S+4S              |
| 295/75R22.5* | 14PR       | G          | 144/141L         | 27                 | 6175                  | 110                       | 5675                | 110                     | 8.25, <b>9.00</b>        | 40.2      | 11.7      | 505        | 115          | 1S+4S              |
| 295/75R22.5* | 16PR       | H          | 146/143L         | 27                 | 6610                  | 120                       | 6005                | 120                     | 8.25, <b>9.00</b>        | 40.2      | 11.7      | 505        | 115          | 1S+4S              |
| 285/75R24.5* | 14PR       | G          | 144/141L         | 27                 | 6175                  | 110                       | 5675                | 110                     | 7.50, <b>8.25</b> , 9.00 | 41.6      | 11.2      | 505        | 119          | 1S+4S              |
| 285/75R24.5* | 16PR       | H          | 147/144L         | 27                 | 6780                  | 120                       | 6175                | 120                     | 7.50, <b>8.25</b> , 9.00 | 41.6      | 11.2      | 505        | 119          | 1S+4S              |

\* EPA SmartWay® verified

^ 3-belt construction

Optimal Grip And Footprint  
With Enhanced Belt Design

Tire-Bar Linked Open Shoulder  
Tread Blocks

Unique Siping

The Fortune **FDR601<sup>ET</sup>** tire's open shoulder design is engineered to deliver extra traction when you need it most. Whether you're navigating challenging terrain or demanding road conditions, this tire keeps you in control.



**MORE sizes. MORE options. MORE with Fortune.**

Scan To See Our  
Full Lineup  
[fortunetireusa.com](https://www.fortunetireusa.com)

Follow Us On Social  
[@fortunetiresusa](https://www.instagram.com/fortunetiresusa)



# FDW802

REGIONAL WINTER DRIVE

**FORTUNE**  
TIRES

## EXPECT MORE

### FEATURES & BENEFITS:

- Unique mixture provides enhanced ice and snow performance
- Three main zigzag grooves and two auxiliary grooves ensure overall tread stiffness and handling
- Open shoulder groove design increases the snow removal and anti-sideslip capability of the tire
- Tie-bar linked tread blocks prevent irregular wear when tires are newer and enhanced, full-depth, 3D siping helps maintain grip as tires age
- Engineered shoulder block ratio and tread design, combined with high tension steel belts, reduce tread deformation in the footprint leading to better traction



### WARRANTY INFO

All Fortune TBR tires come with a 7-Year/3-Retread Limited Warranty

Contact Your Sales Rep.  
[info@prinx.us](mailto:info@prinx.us)  
Prinx Chengshan Tire North America, Inc.  
[fortunetireusa.com](http://fortunetireusa.com)

| TIRE SIZE   | PLY RATING | LOAD RANGE | LOAD SPEED INDEX | TREAD DEPTH (32ND) | MAX LOAD SINGLE (LBS) | MAX PRESSURE SINGLE (PSI) | MAX LOAD DUAL (LBS) | MAX PRESSURE DUAL (PSI) | APPROVED RIM WIDTH | O.D. (IN) | S.W. (IN) | REVS/ MILE | WEIGHT (LBS) | TREAD CONSTRUCTION |
|-------------|------------|------------|------------------|--------------------|-----------------------|---------------------------|---------------------|-------------------------|--------------------|-----------|-----------|------------|--------------|--------------------|
| 11R22.5     | 16PR       | H          | 146/143L         | 28                 | 6610                  | 120                       | 6005                | 120                     | 7.50, <b>8.25</b>  | 41.5      | 11.0      | 486        | 130          | 1S + 4S            |
| 11R24.5     | 16PR       | H          | 149/146L         | 28                 | 7160                  | 120                       | 6610                | 120                     | 7.50, <b>8.25</b>  | 43.5      | 11.0      | 464        | 140          | 1S + 4S            |
| 225/70R19.5 | 14PR       | G          | 128/126N         | 22                 | 3965                  | 110                       | 3745                | 110                     | 6.00, <b>6.75</b>  | 31.9      | 8.9       | 632        | 65           | 1S + 4S            |
| 245/70R19.5 | 16PR       | H          | 135/133N         | 22                 | 4805                  | 120                       | 4540                | 120                     | 7.50, <b>8.25</b>  | 33.3      | 9.8       | 661        | 83           | 1S + 4S            |

Exceptional Ice & Snow Traction

Stability-Oriented  
Shoulder Groove

Exceptional Wear Pattern

Optimized  
Footprint



**MORE sizes. MORE options. EXPECT MORE with Fortune.™**

Scan To See Our  
Full Lineup  
[fortunetireusa.com](https://fortunetireusa.com)

Follow Us On Social

@fortunetiresusa



# FTH107<sup>ET</sup>

LONG HAUL TRAILER

**FORTUNE**  
TIRES

**EXPECT  
MORE**

## FEATURES & BENEFITS:

- 4-groove design for stability and better water evacuation
- Groove protectors to prevent stone drilling and retention
- Unique shoulder design to promote even-wear and longer mileage
- Optimized footprint for low-rolling resistance and even-wear
- 4-belt construction for casing durability and retreading
- EPA SmartWay® verified



## WARRANTY INFO

All Fortune TBR tires come with a 7-Year/3-Retread Limited Warranty


Contact Your Sales Rep.  
[info@prinx.us](mailto:info@prinx.us)  
Prinx Chengshan Tire North America, Inc.  
[fortunetireusa.com](http://fortunetireusa.com)

| TIRE SIZE   | PLY RATING | LOAD RANGE | LOAD SPEED INDEX | TREAD DEPTH (32ND) | MAX LOAD SINGLE (LBS) | MAX PRESSURE SINGLE (PSI) | MAX LOAD DUAL (LBS) | MAX PRESSURE DUAL (PSI) | APPROVED RIM WIDTH       | O.D. (IN) | S.W. (IN) | REVS/ MILE | WEIGHT (LBS) | TREAD CONSTRUCTION |
|-------------|------------|------------|------------------|--------------------|-----------------------|---------------------------|---------------------|-------------------------|--------------------------|-----------|-----------|------------|--------------|--------------------|
| 11R22.5     | 14PR       | G          | 144/142L         | 12                 | 6175                  | 105                       | 5840                | 105                     | 7.50, <b>8.25</b>        | 41.5      | 11.0      | 486        | 105          | 1S+4S              |
| 11R24.5     | 14PR       | G          | 146/143L         | 12                 | 6610                  | 105                       | 6005                | 105                     | 7.50, <b>8.25</b>        | 43.5      | 11.0      | 464        | 113          | 1S+4S              |
| 295/75R22.5 | 14PR       | G          | 144/141L         | 12                 | 6175                  | 110                       | 5675                | 110                     | 8.25, <b>9.00</b>        | 39.9      | 11.7      | 505        | 101          | 1S+4S              |
| 285/75R24.5 | 14PR       | G          | 144/141L         | 12                 | 6175                  | 110                       | 5675                | 110                     | 7.50, <b>8.25</b> , 9.00 | 41.3      | 11.2      | 505        | 106          | 1S+4S              |

Unique Shoulder Design

Groove Protectors

Optimized Footprint

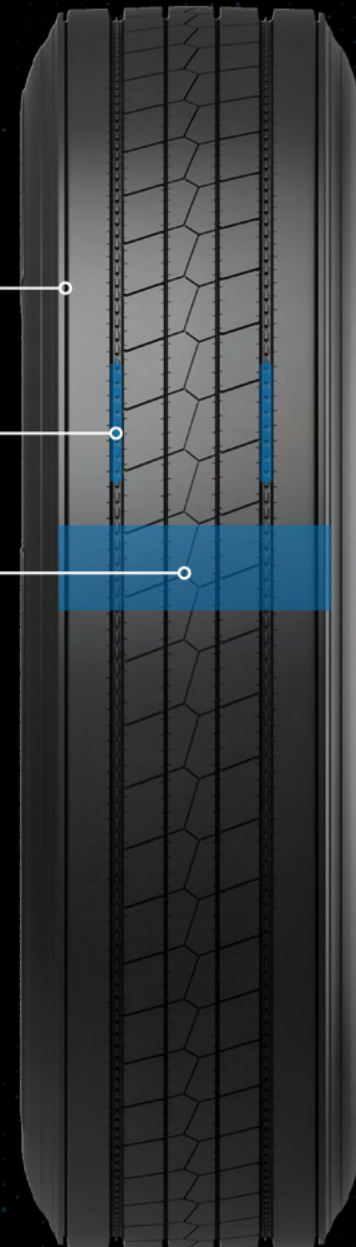

Elevate your long haul trailer experience with the **FTH107<sup>ET</sup>** Long Haul Trailer Tire—where stability, durability, efficiency and environmental responsibility converge.



**MORE sizes. MORE options. MORE with Fortune.**

Scan To See Our  
Full Lineup  
[fortunetireusa.com](https://www.fortunetireusa.com)

Follow Us On Social  
[@fortunetiresusa](https://twitter.com/fortunetiresusa)



# FTH102

## SPREAD-AXLE TRAILER

**FORTUNE**  
TIRES

# EXPECT MORE

### FEATURES & BENEFITS:

- Advanced tread compound engineered for high-scrub applications
- Enhanced shoulder design provides even dispersion of lateral forces, safeguarding against abrasion
- Zigzag shoulder groove bottom provides extra stability for the shoulder pattern blocks
- Stone ejectors and gradient grooves reduce tread-cap damage
- Engineered with a big-bead filler and high-strength rim cushion for high-load handling capability



### WARRANTY INFO

All Fortune TBR tires come with a 7-Year/3-Retread Limited Warranty


Contact Your Sales Rep.  
[info@prinx.us.com](mailto:info@prinx.us.com)  
Prinx Chengshan Tire North America, Inc.  
[fortunetireusa.com](http://fortunetireusa.com)

| TIRE SIZE   | PLY RATING | LOAD RANGE | LOAD SPEED INDEX | TREAD DEPTH (32ND) | MAX LOAD SINGLE (LBS) | MAX PRESSURE SINGLE (PSI) | MAX LOAD DUAL (LBS) | MAX PRESSURE DUAL (PSI) | APPROVED RIM WIDTH | O.D. (IN) | S.W. (IN) | REVS/ MILE | WEIGHT (LBS) | TREAD CONSTRUCTION |
|-------------|------------|------------|------------------|--------------------|-----------------------|---------------------------|---------------------|-------------------------|--------------------|-----------|-----------|------------|--------------|--------------------|
| 11R22.5     | 14PR       | G          | 144/142L         | 17                 | 6175                  | 105                       | 5840                | 105                     | 7.50, <b>8.25</b>  | 41.5      | 11.0      | 486        | 109          | 1S+4S              |
| 11R22.5     | 16PR       | H          | 146/143L         | 17                 | 6610                  | 120                       | 6005                | 120                     | 7.50, <b>8.25</b>  | 41.5      | 11.0      | 486        | 109          | 1S+4S              |
| 11R24.5     | 14PR       | G          | 146/143L         | 17                 | 6610                  | 105                       | 6005                | 105                     | 7.50, <b>8.25</b>  | 43.5      | 11.0      | 464        | 117          | 1S+4S              |
| 11R24.5     | 16PR       | H          | 149/146L         | 17                 | 7160                  | 120                       | 6610                | 120                     | 7.50, <b>8.25</b>  | 43.5      | 11.0      | 464        | 117          | 1S+4S              |
| 255/70R22.5 | 16PR       | H          | 140/137L         | 17                 | 5510                  | 120                       | 5070                | 120                     | <b>7.50</b> , 8.25 | 36.6      | 10.0      | 551        | 86           | 1S+4S              |
| 295/75R22.5 | 14PR       | G          | 144/141L         | 17                 | 6175                  | 110                       | 5675                | 110                     | 8.25, <b>9.00</b>  | 39.9      | 11.7      | 505        | 105          | 1S+4S              |
| 295/75R22.5 | 16PR       | H          | 149/146L         | 17                 | 7160                  | 125                       | 6610                | 125                     | 8.25, <b>9.00</b>  | 39.9      | 11.7      | 505        | 105          | 1S+4S              |

Enhanced Shoulder Design

Stability-Oriented  
Shoulder Groove

Superior Stone Ejector and  
Gradient Grooves

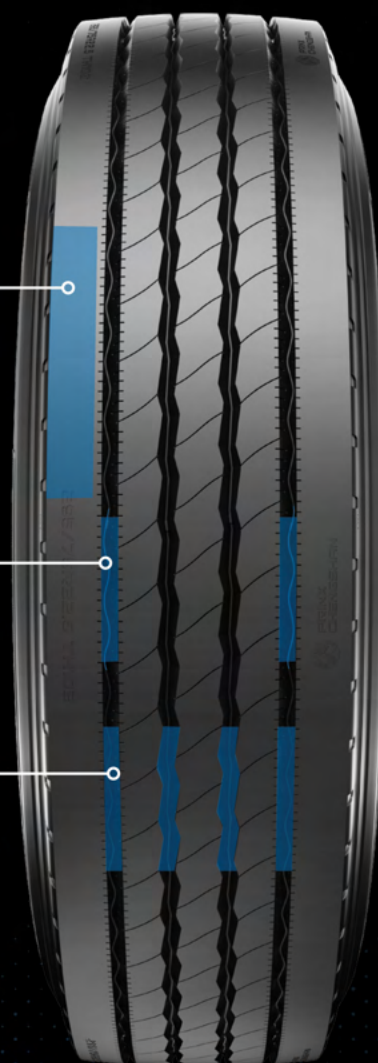

**MORE sizes. MORE options. MORE with Fortune.**

Scan To See Our  
Full Lineup  
[fortunetireusa.com](https://fortunetireusa.com)

Follow Us On Social  
[@fortunetiresusa](https://twitter.com/fortunetiresusa)



# FAM210

MIXED SERVICE ON/OFF-ROAD ALL-POSITION

**FORTUNE**  
TIRES

**EXPECT  
MORE**

## FEATURES & BENEFITS:

- Designed for mixed service applications: refuse trucks, oil patch vehicles, logging, mining and concrete mixers
- Special chip/cut compound for longer tire life and resistance to scrapes, chips and cuts
- 4-rib unique tread design for improved traction
- Optimized footprint for improved weight distribution
- 4-belt construction for casing durability and retreading



FAM210-A  
5-RIB DESIGN



## WARRANTY INFO

All Fortune TBR tires come with a 7-Year/3-Retread Limited Warranty

Contact Your Sales Rep.  
[info@prinx.us.com](mailto:info@prinx.us.com)  
Prinx Chengshan Tire North America, Inc.  
[fortunetireusa.com](http://fortunetireusa.com)

| TIRE SIZE     | PLY RATING | LOAD RANGE | LOAD SPEED INDEX | TREAD DEPTH (32ND) | MAX LOAD SINGLE (LBS) | MAX PRESSURE SINGLE (PSI) | MAX LOAD DUAL (LBS) | MAX PRESSURE DUAL (PSI) | APPROVED RIM WIDTH | O.D. (IN) | S.W. (IN) | REVS/ MILE | WEIGHT (LBS) | TREAD CONSTRUCTION |
|---------------|------------|------------|------------------|--------------------|-----------------------|---------------------------|---------------------|-------------------------|--------------------|-----------|-----------|------------|--------------|--------------------|
| 11R22.5       | 16PR       | H          | 146/143K         | 24                 | 6610                  | 120                       | 6005                | 120                     | 7.50, <b>8.25</b>  | 41.5      | 11.0      | 486        | 121          | 1S+4S              |
| 11R24.5       | 16PR       | H          | 149/146K         | 24                 | 7160                  | 130                       | 6610                | 130                     | 7.50, <b>8.25</b>  | 43.5      | 11.0      | 464        | 129          | 1S+4S              |
| 255/70R22.5*  | 16PR       | H          | 140/137L         | 23                 | 5510                  | 120                       | 5070                | 120                     | <b>7.50</b> , 8.25 | 36.6      | 10.0      | 551        | 94           | 1S+4S              |
| 275/70R22.5   | 18PR       | J          | 148/145K         | 23                 | 6940                  | 130                       | 6395                | 130                     | <b>8.25</b> , 9.00 | 37.7      | 10.9      | 535        | 111          | 1S+4S              |
| 315/80R22.5*  | 20PR       | L          | 161/157K         | 24                 | 10000                 | 130                       | 8270                | 130                     | <b>9.00</b> , 9.75 | 42.4      | 12.3      | 476        | 146          | 1S+4S              |
| 315/80R22.5*^ | 20PR       | L          | 161/157K         | 23                 | 10200                 | 130                       | 8270                | 130                     | <b>9.00</b> , 9.75 | 42.4      | 12.3      | 476        | 146          | 1S+4S              |

\* M+S rated size

^ FAM210-A, 5-rib design (new for 2025)

Chip/Cut Compound

4-Rib Design And  
Optimized Footprint

Designed to conquer the harshest environments, the Fortune **FAM210** tire is the tire of choice for mixed service vehicles. No matter the challenge, this tire is up to the task.



**MORE sizes. MORE options. MORE with Fortune.**

Scan To See Our  
Full Lineup  
[fortunetireusa.com](https://www.fortunetireusa.com)

Follow Us On Social  
[@fortunetiresusa](https://twitter.com/fortunetiresusa)



# FAM211

**MIXED SERVICE WIDE BASE ON/OFF-ROAD  
ALL-POSITION**

**FORTUNE**  
TIRES

**EXPECT  
MORE**

## FEATURES & BENEFITS:

- Designed for mixed service applications: refuse trucks, concrete mixers, dump trucks, logging and mining vehicles
- Special chip/cut compound for longer tire life and resistance to scrapes, chips and cuts
- Unique crown grooving for better heat dissipation
- 4-belt construction for casing durability and retreading
- 445/65R22.5 comes with a zero degree steel belt for improved stability under heavy loads and extended tire life



## WARRANTY INFO

All Fortune TBR tires come with a 7-Year/3-Retread Limited Warranty

Contact Your Sales Rep.  
[info@prinx.us.com](mailto:info@prinx.us.com)  
Prinx Chengshan Tire North America, Inc.  
[fortunetireusa.com](http://fortunetireusa.com)

| TIRE SIZE    | PLY RATING | LOAD RANGE | LOAD SPEED INDEX | TREAD DEPTH (32ND) | MAX LOAD SINGLE (LBS) | MAX PRESSURE SINGLE (PSI) | MAX LOAD DUAL (LBS) | MAX PRESSURE DUAL (PSI) | APPROVED RIM WIDTH  | O.D. (IN) | S.W. (IN) | REVS/ MILE | WEIGHT (LBS) | TREAD CONSTRUCTION |
|--------------|------------|------------|------------------|--------------------|-----------------------|---------------------------|---------------------|-------------------------|---------------------|-----------|-----------|------------|--------------|--------------------|
| 385/65R22.5  | 20PR       | L          | 160K             | 23                 | 9920                  | 130                       | NA                  | NA                      | 11.75, 12.25        | 42.2      | 15.3      | 478        | 176          | 1S+4S              |
| 425/65R22.5  | 20PR       | L          | 165K             | 23                 | 11400                 | 120                       | NA                  | NA                      | 11.75, 12.25, 13.00 | 44.3      | 16.6      | 476        | 202          | 1S+4S              |
| 445/65R22.5* | 22PR       | M          | 169K             | 25                 | 12800                 | 130                       | NA                  | NA                      | 12.25, 13.00, 14.00 | 45.3      | 17.5      | 445        | 217          | 1S+5S              |

\* 5-belt construction (new for 2025)

Expect more in on/off-road performance with the Fortune **FAM211** wide base all-position tire. It's not just a tire; it's your partner in durability, versatility, reliability and precision uniformity.

Chip/Cut Compound

Heat-Dissipating Crown Groove Design

Tie-Bar Design For Better Wear Resistance



**MORE sizes. MORE options. MORE with Fortune.**

Scan To See Our  
Full Lineup  
[fortunetireusa.com](https://www.fortunetireusa.com)

Follow Us On Social  
[@fortunetiresusa](https://www.instagram.com/fortunetiresusa)



# FDM212

**MIXED SERVICE OPEN SHOULDER  
DEEP-TREAD DRIVE**

**FORTUNE**  
TIRES

**EXPECT  
MORE**

## FEATURES & BENEFITS:

- Designed for on/off-road applications
- 3-Peak Mountain Snowflake rated for all-weather conditions
- Special chip/cut compound for longer tire life and resistance to scrapes, chips and cuts
- Enhanced casing design for better durability and optimal weight distribution
- Tread base designed for effective stone ejection and to prevent stone drilling
- Low void design for enhanced driving performance in extreme conditions
- 4-belt construction for casing durability and retreading



## WARRANTY INFO

All Fortune TBR tires come with a 7-Year/3-Retread Limited Warranty

Contact Your Sales Rep.  
[info@prinx.us.com](mailto:info@prinx.us.com)  
Prinx Chengshan Tire North America, Inc.  
[fortunetireusa.com](http://fortunetireusa.com)

| TIRE SIZE | PLY RATING | LOAD RANGE | LOAD SPEED INDEX | TREAD DEPTH (32ND) | MAX LOAD SINGLE (LBS) | MAX PRESSURE SINGLE (PSI) | MAX LOAD DUAL (LBS) | MAX PRESSURE DUAL (PSI) | APPROVED RIM WIDTH | O.D. (IN) | S.W. (IN) | REVS/ MILE | WEIGHT (LBS) | TREAD CONSTRUCTION |
|-----------|------------|------------|------------------|--------------------|-----------------------|---------------------------|---------------------|-------------------------|--------------------|-----------|-----------|------------|--------------|--------------------|
| 11R22.5   | 16PR       | H          | 146/143K         | 30                 | 6610                  | 120                       | 6005                | 120                     | 7.50, <b>8.25</b>  | 41.5      | 10.7      | 482        | 124          | 1S+4S              |
| 11R24.5   | 16PR       | H          | 149/146K         | 30                 | 7160                  | 120                       | 6610                | 120                     | 7.50, <b>8.25</b>  | 43.5      | 10.7      | 464        | 133          | 1S+4S              |

Designed for logging, mining and construction vehicles that brave harsh or winter conditions, the Fortune **FDM212** tire is the ultimate choice for on/off-road applications. This tire is your reliable partner in challenging environments.

Chip/Cut Compound

Aggressive Open Shoulder Design

Specially Designed Tread Base

3PMS Rated  
For All-Weather  
Confidence



**MORE sizes. MORE options. MORE with Fortune.**

Scan To See Our  
Full Lineup  
[fortunetireusa.com](https://www.fortunetireusa.com)

Follow Us On Social  
[@fortunetiresusa](https://www.instagram.com/fortunetiresusa)



# FDM213

**MIXED SERVICE OPEN SHOULDER  
DEEP-TREAD DRIVE**

**FORTUNE**  
TIRES

**EXPECT  
MORE**

## FEATURES & BENEFITS:

- 33/32nd extra deep tread-offers extended service life with more miles and traction
- Special Chip/Cut compound to withstand the rigors of severe work environments
- Large pattern blocks and self-cleaning grooves provide control and stability on mud, gravel, and snow while shedding debris effortlessly
- Protective ribs in groove bottom act as a barrier to reduce the risk of punctures and protect the casing
- Deep groove depth with optimized width ratio maximizes wear resistance by distributing the load more evenly across the tire's surface




## WARRANTY INFO

All Fortune TBR tires come with a 7-Year/3-Retread Limited Warranty

Contact Your Sales Rep.  
[info@prinx.us.com](mailto:info@prinx.us.com)  
Prinx Chengshan Tire North America, Inc.  
[fortunetireusa.com](http://fortunetireusa.com)

| TIRE SIZE | PLY RATING | LOAD RANGE | LOAD SPEED INDEX | TREAD DEPTH (32ND) | MAX LOAD SINGLE (LBS) | MAX PRESSURE SINGLE (PSI) | MAX LOAD DUAL (LBS) | MAX PRESSURE DUAL (PSI) | APPROVED RIM WIDTH | O.D. (IN) | S.W. (IN) | REVS/ MILE | WEIGHT (LBS) | TREAD CONSTRUCTION |
|-----------|------------|------------|------------------|--------------------|-----------------------|---------------------------|---------------------|-------------------------|--------------------|-----------|-----------|------------|--------------|--------------------|
| 11R22.5   | 16PR       | H          | 146/143K         | 33                 | 6610                  | 120                       | 6005                | 120                     | 7.50, <b>8.25</b>  | 41.5      | 11.0      | 486        | 134          | 1S+4S              |
| 11R24.5   | 16PR       | H          | 149/146K         | 33                 | 7160                  | 120                       | 6610                | 120                     | 7.50, <b>8.25</b>  | 43.5      | 11.0      | 464        | 142          | 1S+4S              |

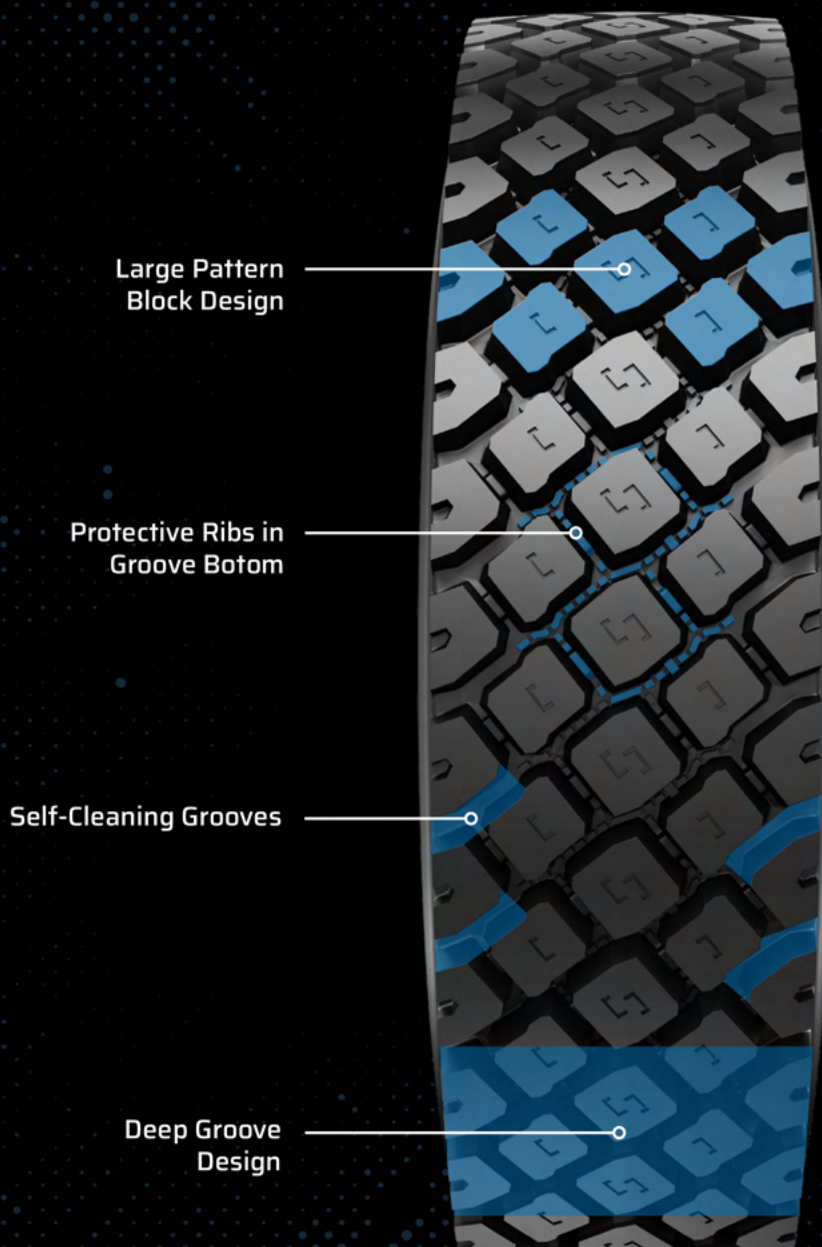

**MORE sizes. MORE options. EXPECT MORE with Fortune.™**

Scan To See Our  
Full Lineup  
[fortunetireusa.com](https://fortunetireusa.com)

Follow Us On Social  
[@fortunetiresusa](https://twitter.com/fortunetiresusa)



# FST02

## ST RADIAL ALL-STEEL SPECIALTY TRAILER

**FORTUNE**  
TIRES

# EXPECT MORE

### FEATURES & BENEFITS:

- All-steel specialty tire designed specifically for trailers that demand increased load-bearing capacity and outstanding durability
- Unique sipe distribution offers good tire traction, handling and safety
- New polybutadiene rubber and optimized footprint shape ensures excellent wear-resistant performance
- Provides resistance to stone drilling
- For trailer use only



### WARRANTY INFO

24/7 Roadside Assistance



| TIRE SIZE   | PLY RATING | LOAD RANGE | LOAD SPEED INDEX | TREAD DEPTH (32ND) | MAX LOAD SINGLE (LBS) | MAX PRESSURE SINGLE (PSI) | MAX LOAD DUAL (LBS) | MAX PRESSURE DUAL (PSI) | APPROVED RIM WIDTH | O.D. (IN) | S.W. (IN) | REVS/ MILE | WEIGHT (LBS) | TREAD CONSTRUCTION |
|-------------|------------|------------|------------------|--------------------|-----------------------|---------------------------|---------------------|-------------------------|--------------------|-----------|-----------|------------|--------------|--------------------|
| ST225/90R16 | 14PR       | G          | 129/125L         | 13                 | 4080                  | 110                       | 3640                | 110                     | 6.50, 7.00         | 31.8      | 8.7       | 653        | 58           | 1S+3S              |
| ST235/85R16 | 14PR       | G          | 132/127L         | 12                 | 4400                  | 110                       | 3860                | 110                     | 6.00, 7.00, 7.50   | 31.8      | 9.3       | 655        | 60           | 1S+3S              |
| ST235/80R16 | 14PR       | G          | 129/125L         | 12                 | 4080                  | 110                       | 3640                | 110                     | 6.00, 7.00, 7.50   | 30.8      | 9.3       | 675        | 59           | 1S+3S              |

Optimized Footprint  
And Compound

Heavy Duty All-Steel  
Construction

Unique Sipe  
Distribution



The **FST02** is an all-steel specialty trailer tire designed specifically for trailers that demand increased load-bearing capacity and outstanding durability. It's your tire of choice when the journey is tough and the cargo is heavy.

In the event of an unexpected flat tire, our **Roadside Tire Assistance** will replace your customer's damaged tire or tow them to the nearest qualified repair facility.



**MORE sizes. MORE options. MORE with Fortune.**

Scan To See Our  
Full Lineup  
[fortunetireusa.com](https://www.fortunetireusa.com)

Follow Us On Social  
[@fortunetiresusa](https://www.instagram.com/fortunetiresusa)

