

LONG HAUL

FFH130^{ET}

An advanced long haul steer tire designed for heavy vehicles and exceptional performance and efficiency.



APPLICATION



KEY ATTRIBUTES



FEATURES & BENEFITS

1. Extended Lifespan

Continuous shoulder rib with decoupling groove promotes even wear and increases mileage over the life of the tire

2. Damage Resistant

Reinforced defensive ribs in the outer grooves help maintain even-wear and resist damage

3. Stone Drilling Protection

Stone ejector grooves effectively prevent stone drilling—preserving casing integrity and ensuring maximum retreadability

4. Exceptional Wet Braking

Innovative groove and rib siping improves wet braking and handling

5. Heavy Equipment Optimized

Higher load index and 16-ply rating engineered to handle heavy tractors with ease



**FORTUNE
TIRES** 

EXPECT MORE™

EPA SmartWay® verified
for low-rolling resistance.

Contact a sales representative at
fortunetireusa.com/dealer-contact




Scan to see our
full lineup

fortunetireusa.com



TIRE SIZE	PR/LOAD RANGE	LOAD SPEED INDEX	TREAD DEPTH (32ND)	MAX LOAD SINGLE (LBS)	MAX PRESSURE SINGLE (PSI)	MAX LOAD DUAL (LBS)	MAX PRESSURE DUAL (PSI)	MEASURING RIM	APPROVED RIM WIDTH (IN)	O.D. (IN)	S.W. (IN)	REVS/MILE	WEIGHT (LBS)	TREAD CONSTRUCTION
11R22.5	16H	146/143L	20	6610	120	6005	120	8.25	7.50, 8.25	41.5	11.0	503	118	1S+4S
11R24.5	16H	149/146L	20	7160	120	6610	120	8.25	7.50, 8.25	43.5	11.0	477	126	1S+4S
295/75R22.5	14G	144/141L	20	6175	110	5675	110	9.00	8.25, 9.00	39.9	11.7	520	113	1S+4S
295/75R22.5	16H	149/146L	20	7160	123	6610	123	9.00	8.25, 9.00	39.9	11.7	520	113	1S+4S

All specifications subject to change

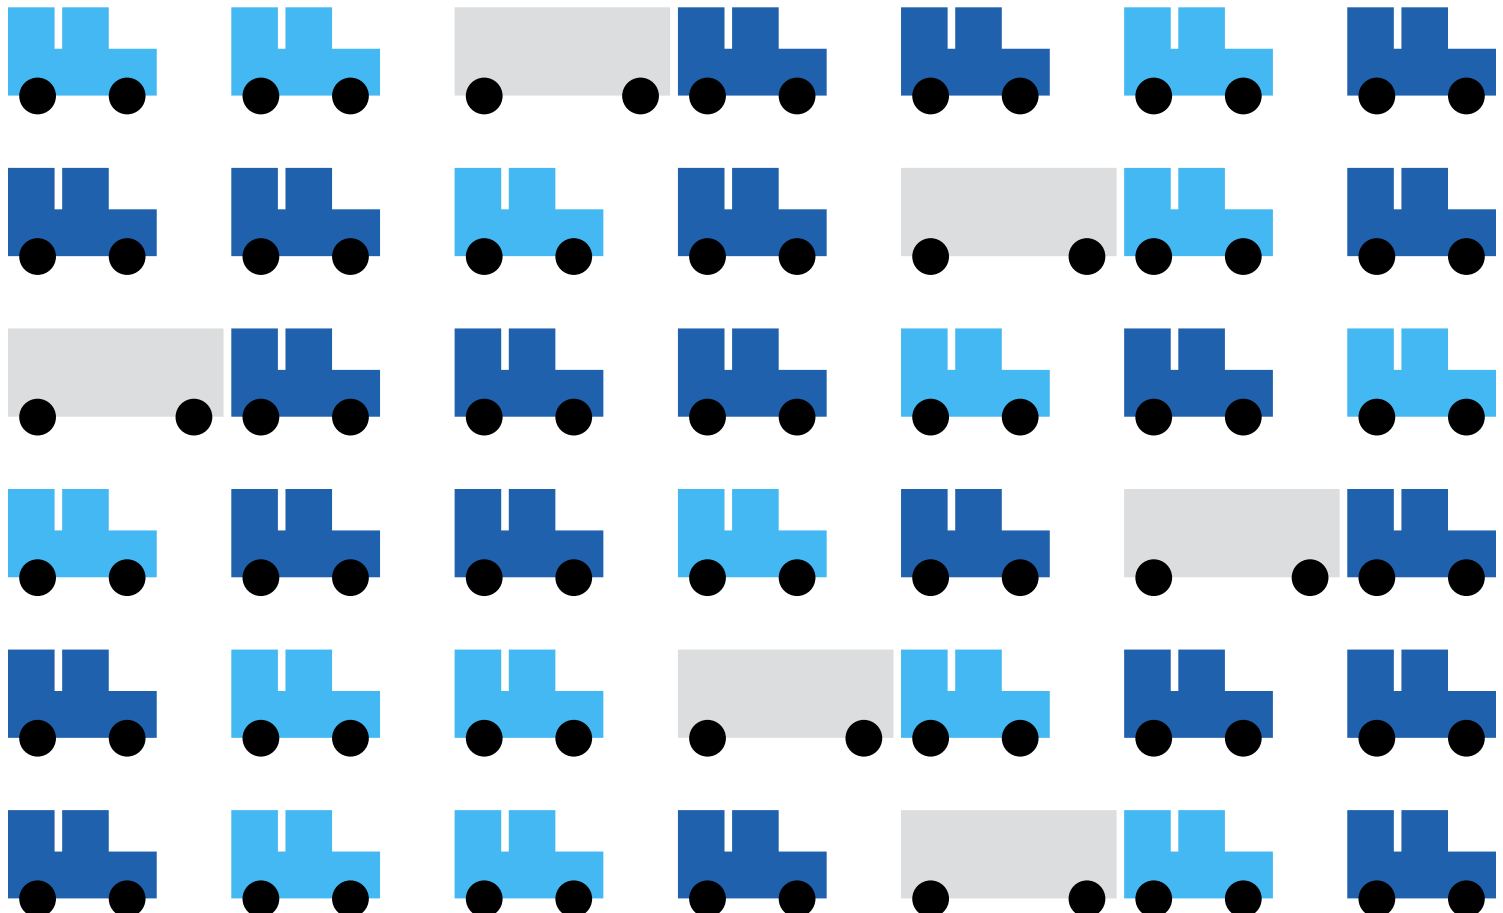

REGIONAL ALL POSITION

FAR602^{ET}

A low heat generating, premium, 5-rib tire that is known for its increased mileage and fuel efficiency.



APPLICATION



KEY ATTRIBUTES



FEATURES & BENEFITS

- 1. Exceptional Wet Traction**
5-rib / 4-groove design, maximizes evacuation and braking in wet conditions
- 2. Superior Wear Pattern**
Edge sipes along outside grooves help ensure even treadwear
- 3. Enhanced Traction & Heat Dispersion**
Sipes across the central rib facilitate better grip and help tires run cooler
- 4. Stone Drilling Protection**
Stone ejector grooves effectively prevent stone drilling—preserving casing integrity and ensuring maximum retreadability
- 5. Reduced Chafing and Wear**
Optimized bead bundle provides improved durability and performance



**FORTUNE
TIRES** 

EXPECT MORE™

EPA SmartWay® verified
for low-rolling resistance.

Contact a sales representative at
[fortunetireusa.com/dealer-contact](https://www.fortunetireusa.com/dealer-contact)



Scan to see our
full lineup

[fortunetireusa.com](https://www.fortunetireusa.com)






TIRE SIZE	PR/LOAD RANGE	LOAD SPEED INDEX	TREAD DEPTH (32ND)	MAX LOAD SINGLE (LBS)	MAX PRESSURE SINGLE (PSI)	MAX LOAD DUAL (LBS)	MAX PRESSURE DUAL (PSI)	MEASURING RIM	APPROVED RIM WIDTH (IN)	O.D. (IN)	S.W. (IN)	REVS/MILE	WEIGHT (LBS)	TREAD CONSTRUCTION
10R22.5	14G	141/139L	18	5675	115	5355	115	7.50	6.75, 7.50, 8.25	40.1	10.0	516	100	1S+4S
11R22.5*	14G	144/142L	18	6175	105	5840	105	8.25	7.50, 8.25	41.5	11.0	501	111	1S+4S
11R22.5*	16H	146/143L	18	6610	120	6005	120	8.25	7.50, 8.25	41.5	11.0	501	111	1S+4S
11R24.5*	14G	146/143L	18	6610	105	6005	105	8.25	7.50, 8.25	43.5	11.0	478	120	1S+4S
11R24.5*	16H	149/146L	18	7160	120	6610	120	8.25	7.50, 8.25	43.5	11.0	478	120	1S+4S
215/75R17.5	16H	135/133L	15	4805	125	4540	125	6.00	6.00, 6.75	30.2	8.3	681	58	1S+4S
235/75R17.5	18J	143/141J	15	6005	125	5675	125	6.75	6.75, 7.50	31.4	9.2	662	67	1S+4S
245/70R17.5	18J	136/134M	17	4940	125	4675	125	7.50	6.75, 7.50	31.1	9.8	670	70	1S+4S
245/70R17.5	18J	143/141J	17	6005	125	5675	125	7.50	6.75, 7.50	31.1	9.8	670	70	1S+4S
225/70R19.5^	12F	125/123N	15	3640	95	3415	95	6.75	6.00, 6.75	31.9	8.9	648	65	1S+3S
225/70R19.5^	14G	128/126N	15	3970	110	3750	110	6.75	6.00, 6.75	31.9	8.9	648	65	1S+3S
245/70R19.5	14G	133/131N	16	4540	110	4300	110	7.50	6.75, 7.50	33.0	9.8	627	72	1S+4S
245/70R19.5	16H	126/134N	16	4940	120	4675	120	7.50	6.75, 7.50	33.0	9.8	627	72	1S+4S
265/70R19.5	14G	137/134M	18	5070	110	4675	110	7.50	7.50, 8.25	34.1	10.3	605	83	1S+4S
255/70R22.5	16H	140/137M	17	5510	120	5070	120	7.50	7.50, 8.25	36.6	10.0	567	85	1S+4S
275/70R22.5	18J	148/145L	18	6940	130	6395	130	8.25	8.25, 9.00	37.7	10.9	546	106	1S+4S
295/75R22.5*	14G	144/141L	18	6175	110	5675	110	9.00	8.25, 9.00	39.9	11.7	519	106	1S+4S
295/75R22.5*	16H	146/143L	18	6610	120	6005	120	9.00	8.25, 9.00	39.9	11.7	519	106	1S+4S
285/75R24.5*	14G	144/141L	18	6175	110	5675	110	8.25	7.50, 8.25, 9.00	41.3	11.1	503	112	1S+4S
285/75R24.5*	16H	147/144L	18	6780	120	6175	120	8.25	7.50, 8.25, 9.00	41.3	11.1	503	112	1S+4S

*Select sizes are EPA SmartWay® verified
 ^3-belt construction

All specifications subject to change

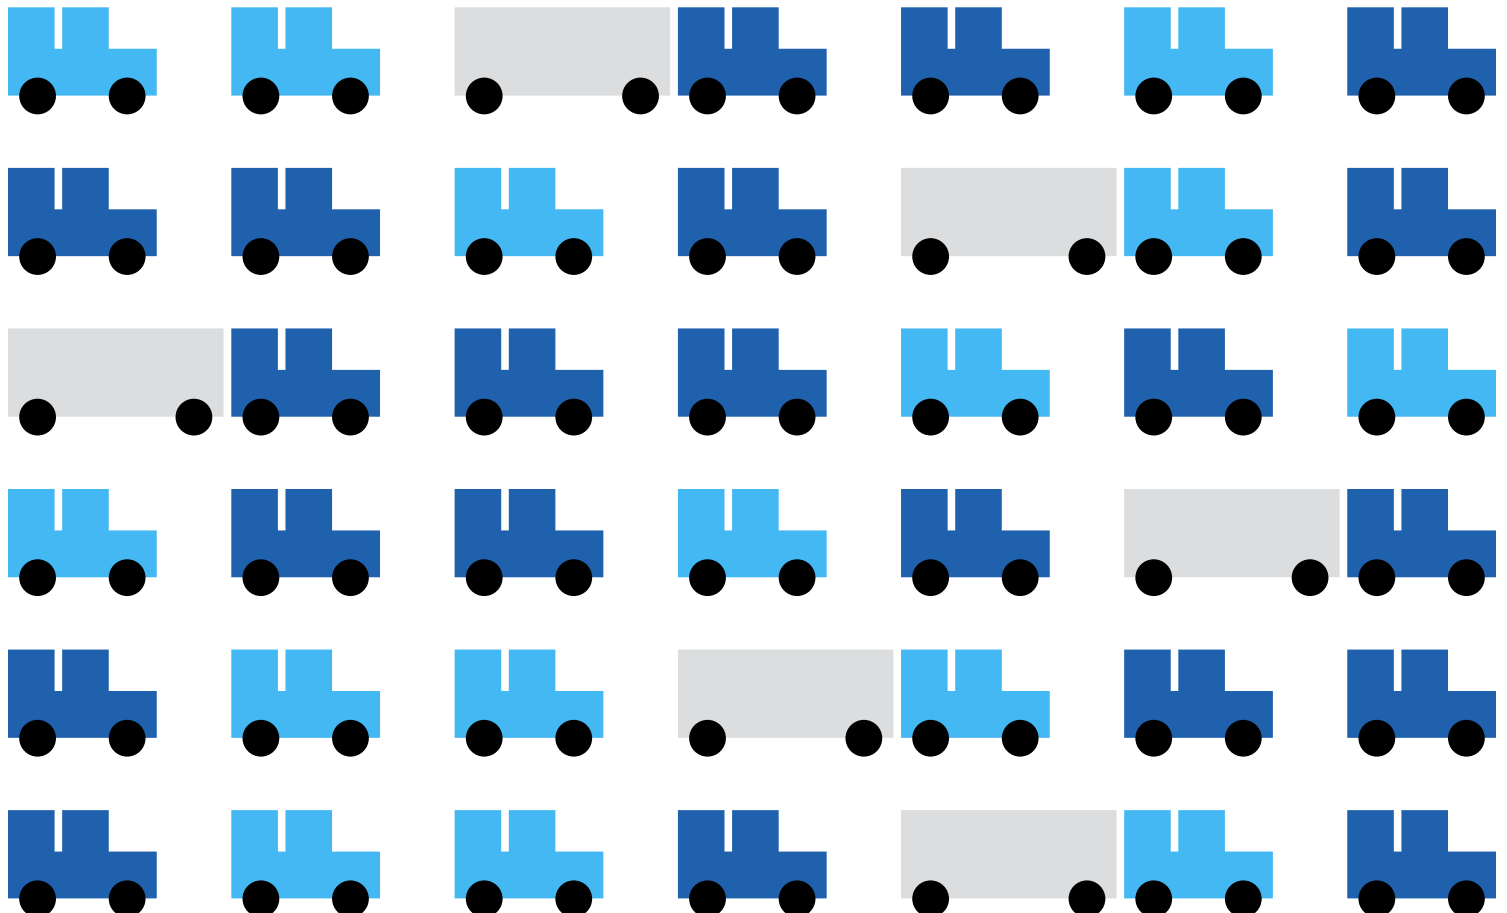


REGIONAL

FAR603

An all-weather, all-position, motorcoach tire that performs with precision, especially at high speeds.



APPLICATION



KEY ATTRIBUTES



FEATURES & BENEFITS

1. Alignment-Friendly

Markings located on the solid shoulders readily identify any vehicle alignment issues

2. Exceptional Wear Pattern

Multi-angle grooves and optimized rib widths add tread rigidity and provide a more uniform wear pattern

3. Superior Traction

Smart "Movematic" sipes close to stiffen tread and improve grip while rolling through a consistent footprint

4. All-Weather Rated

This tire is 3PMS certified and L-speed rated up to 75 MPH

5. Value Engineered Casing

Durable casing design for superior retreadability



**FORTUNE
TIRES** 

EXPECT MORE™

Superior performance in
rain, heat, and snow.

Contact a sales representative at
[fortunetireusa.com/dealer-contact](https://www.fortunetireusa.com/dealer-contact)



Scan to see our
full lineup


[fortunetireusa.com](https://www.fortunetireusa.com)





TIRE SIZE	PR/ LOAD RANGE	LOAD SPEED INDEX	TREAD DEPTH (32ND)	MAX LOAD SINGLE (LBS)	MAX PRESSURE SINGLE (PSI)	MAX LOAD DUAL (LBS)	MAX PRESSURE DUAL (PSI)	MEASURING RIM	APPROVED RIM WIDTH (IN)	O.D. (IN)	S.W. (IN)	REVS/ MILE	WEIGHT (LBS)	TREAD CONSTRUCTION
315/80R22.5	20L	161/157L	20	10000	130	9090	130	9.00	9.00, 9.75	42.4	12.3	488	147	1S+4S

All specifications subject to change

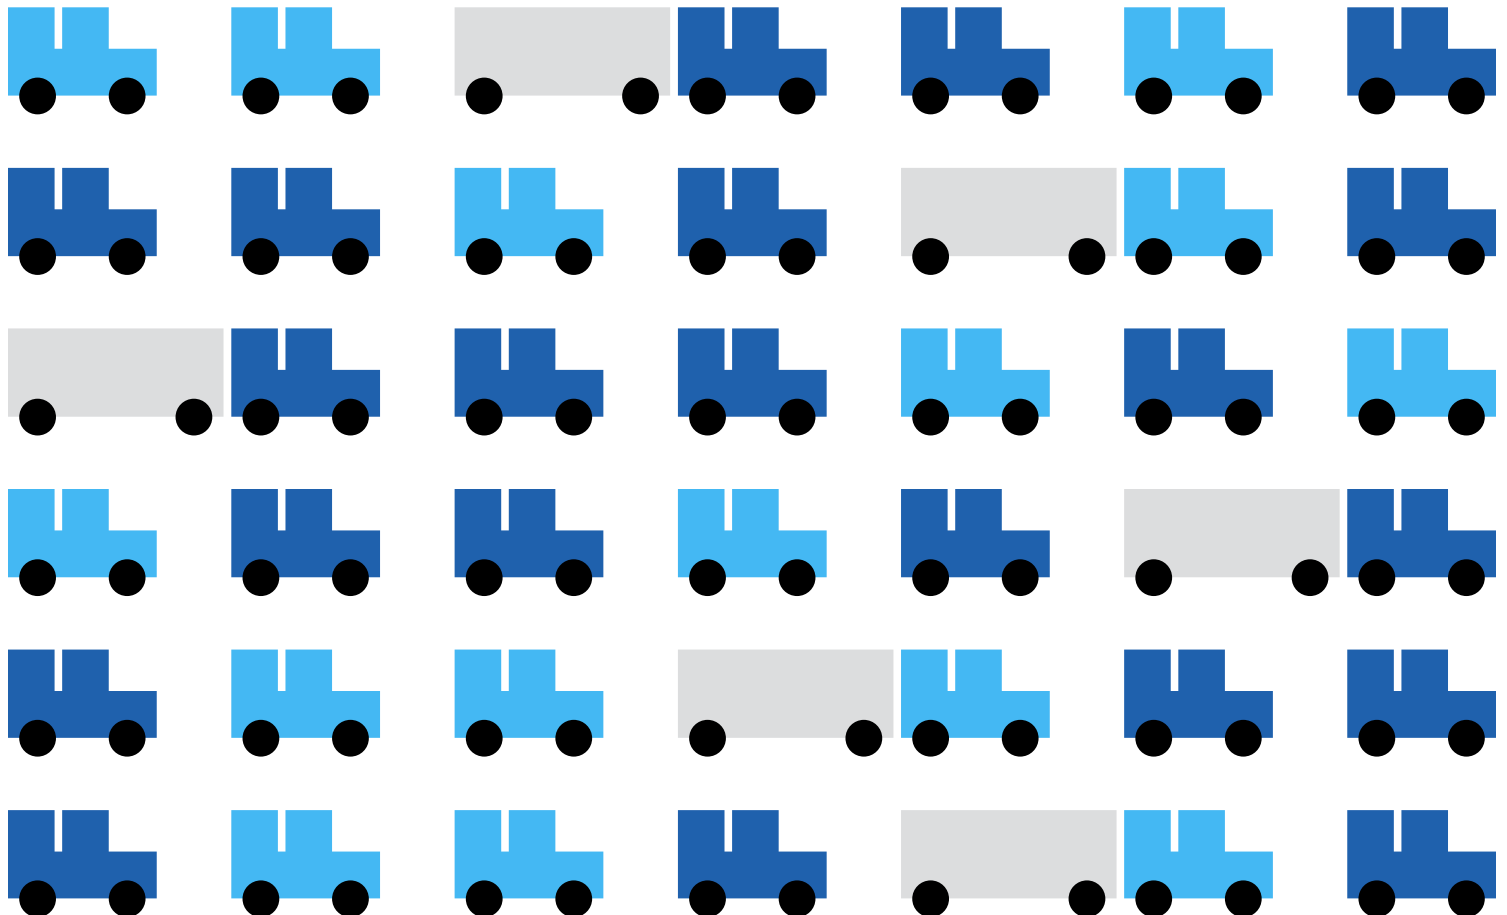

LONG HAUL

FDH106^{ET}

A durable, closed shoulder drive tire with a deep, modern, tread design and remarkable long haul lifespan.



APPLICATION



KEY ATTRIBUTES



FEATURES & BENEFITS

1. Extended Lifespan

Closed shoulder and deep tread depth of 30/32nds promotes even wear and increases mileage over the life of the tire

2. Stone Drilling Protection

Stone ejector grooves effectively prevent stone drilling—preserving casing integrity and ensuring maximum retreadability

3. Exceptional Traction & Mileage

Specialized tread blocks add stability, grip and overall durability

4. Better Starts & Stops

Optimized siping enhances starts, acceleration, and braking



**FORTUNE
TIRES**

EXPECT MORE™

EPA SmartWay® verified
for low-rolling resistance.

Contact a sales representative at
fortunetireusa.com/dealer-contact



Scan to see our
full lineup


fortunetireusa.com





TIRE SIZE	PR/LOAD RANGE	LOAD SPEED INDEX	TREAD DEPTH (32ND)	MAX LOAD SINGLE (LBS)	MAX PRESSURE SINGLE (PSI)	MAX LOAD DUAL (LBS)	MAX PRESSURE DUAL (PSI)	MEASURING RIM	APPROVED RIM WIDTH (IN)	O.D. (IN)	S.W. (IN)	REVS/MILE	WEIGHT (LBS)	TREAD CONSTRUCTION
11R22.5	14G	144/142L	30	6175	105	5840	105	8.25	7.50, 8.25	41.5	11.0	493	133	1S+4S
11R22.5	16H	146/143L	30	6610	120	6005	120	8.25	7.50, 8.25	41.5	11.0	493	133	1S+4S
11R24.5	14G	146/143L	30	6610	105	6005	105	8.25	7.50, 8.25	43.5	11.0	471	142	1S+4S
11R24.5	16H	149/146L	30	7160	120	6610	120	8.25	7.50, 8.25	43.5	11.0	471	142	1S+4S
295/75R22.5	14G	144/141L	30	6175	110	5675	110	9.00	8.25, 9.00	39.9	11.7	508	130	1S+4S
295/75R22.5	16H	146/143L	30	6610	120	6005	120	9.00	8.25, 9.00	39.9	11.7	508	130	1S+4S
285/75R24.5	14G	144/141L	30	6175	110	5675	110	8.25	7.50, 8.25, 9.00	41.3	11.1	494	134	1S+4S
285/75R24.5	16H	147/144L	30	6780	120	6175	120	8.25	7.50, 8.25, 9.00	41.3	11.1	494	134	1S+4S

All specifications subject to change

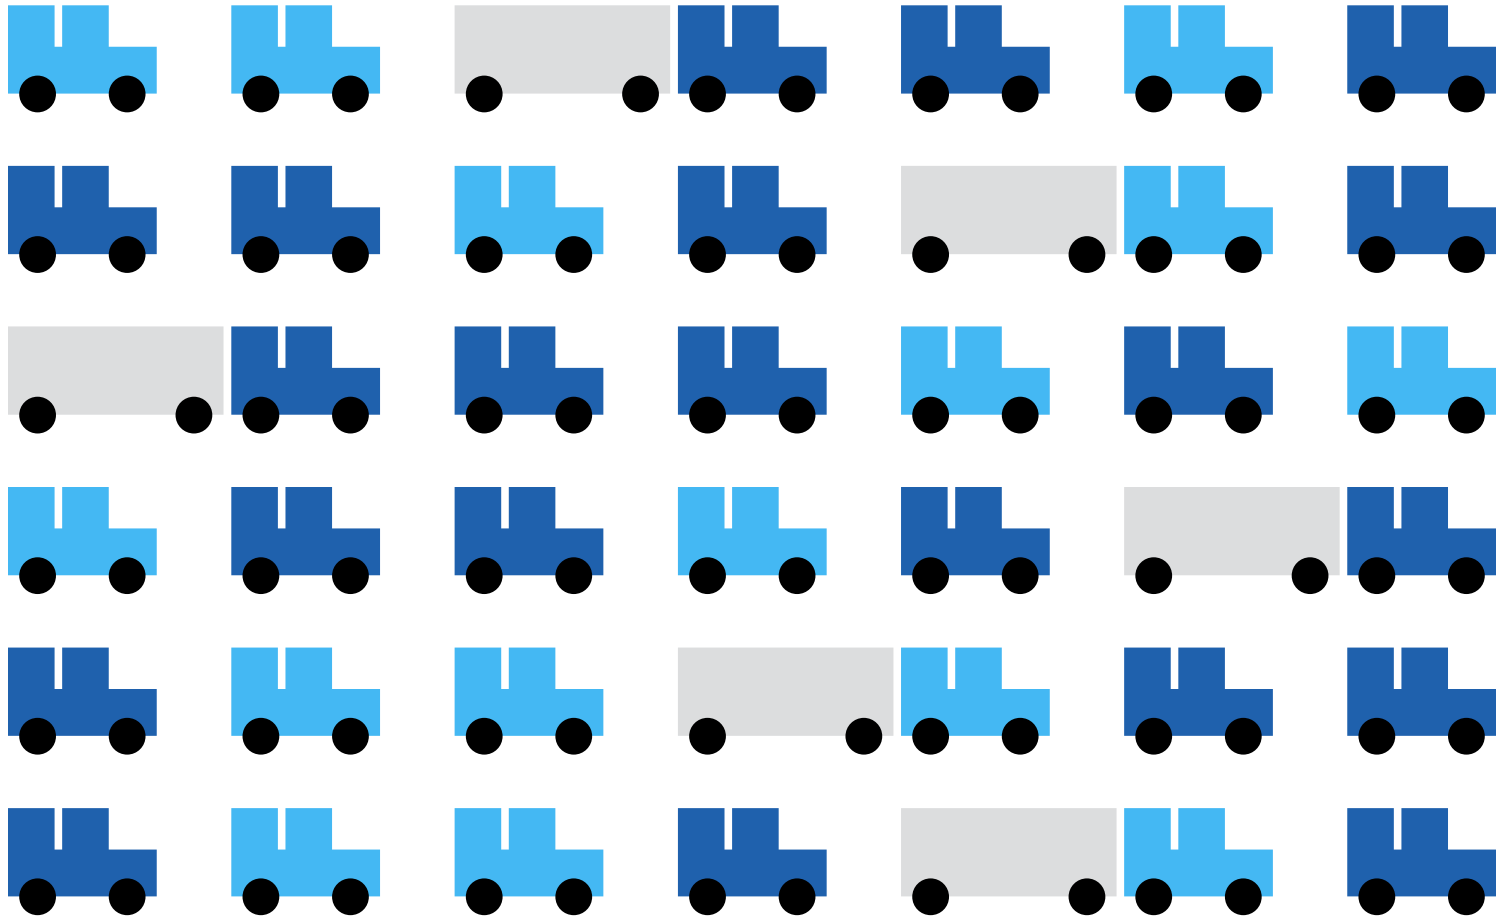

LONG HAUL

FDH131

A closed shoulder drive tire built for regional highway use that prioritizes value and overall dependability.



APPLICATION



KEY ATTRIBUTES



FEATURES & BENEFITS

- 1. Optimized Performance**
Closed shoulder design facilitates high-speed performance, increases mileage, and minimizes wear
- 2. Exceptional Traction**
Specialized tread blocks increase surface area and tire grip
- 3. Enhanced Heat Dispersion**
Unique siping helps tires run cooler
- 4. Stone Drilling Protection**
Stone ejector grooves effectively prevent stone drilling—preserving the casing and ensuring maximum retreadability



**FORTUNE
TIRES** 

EXPECT MORE™

A reliable tire that delivers quality and performance.

Contact a sales representative at fortunetireusa.com/dealer-contact



Scan to see our full lineup


fortunetireusa.com





TIRE SIZE	PR/LOAD RANGE	LOAD SPEED INDEX	TREAD DEPTH (32ND)	MAX LOAD SINGLE (LBS)	MAX PRESSURE SINGLE (PSI)	MAX LOAD DUAL (LBS)	MAX PRESSURE DUAL (PSI)	MEASURING RIM	APPROVED RIM WIDTH (IN)	O.D. (IN)	S.W. (IN)	REVS/MILE	WEIGHT (LBS)	TREAD CONSTRUCTION
11R22.5	14G	144/142L	26	6175	105	5840	105	8.25	7.50, 8.25	41.5	11.0	495	121	1S+4S
11R22.5	16H	146/143L	26	6610	120	6005	120	8.25	7.50, 8.25	41.5	11.0	495	121	1S+4S
11R24.5	14G	146/143L	26	6610	105	6005	105	8.25	7.50, 8.25	43.5	11.0	472	130	1S+4S
11R24.5	16H	149/146L	26	7160	120	6610	120	8.25	7.50, 8.25	43.5	11.0	472	130	1S+4S
295/75R22.5	14G	144/141L	26	6175	110	5675	110	9.00	8.25, 9.00	39.9	11.7	513	114	1S+4S
295/75R22.5	16H	146/143L	26	6610	120	6005	120	9.00	8.25, 9.00	39.9	11.7	513	114	1S+4S

All specifications subject to change

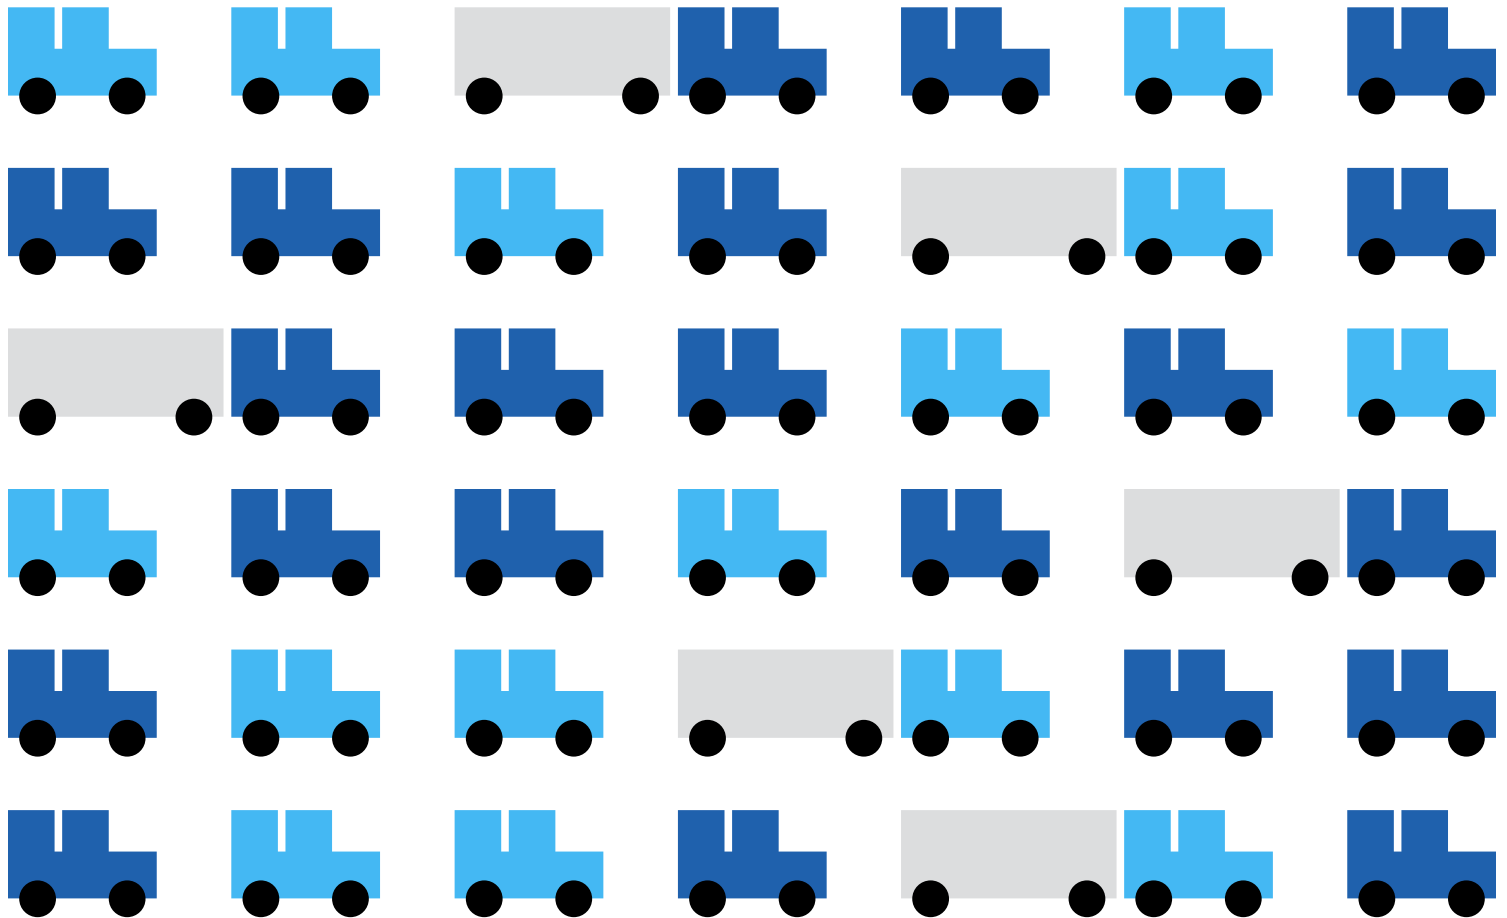

REGIONAL

FDR601^{ET}

An open shoulder drive tire with added traction for demanding conditions and difficult terrain.



APPLICATION



KEY ATTRIBUTES



FEATURES & BENEFITS

1. Added Traction

Open shoulder design, with exposed tread blocks, improves grip along the outer edges of the tire

2. Exceptional Wear Pattern

Tie-bar linked tread blocks prevent irregular wear

3. Structurally Enhanced

Unique siping helps maintain block rigidity and overall integrity of the tire

4. Superior Durability

Robust 4-belt construction preserves the casing and ensures maximum retreadability



**FORTUNE
TIRES** 

EXPECT MORE™

EPA SmartWay® verified
for low-rolling resistance.

Contact a sales representative at
[fortunetireusa.com/dealer-contact](https://www.fortunetireusa.com/dealer-contact)



Scan to see our
full lineup

[fortunetireusa.com](https://www.fortunetireusa.com)






TIRE SIZE	PR/LOAD RANGE	LOAD SPEED INDEX	TREAD DEPTH (32ND)	MAX LOAD SINGLE (LBS)	MAX PRESSURE SINGLE (PSI)	MAX LOAD DUAL (LBS)	MAX PRESSURE DUAL (PSI)	MEASURING RIM	APPROVED RIM WIDTH (IN)	O.D. (IN)	S.W. (IN)	REVS/MILE	WEIGHT (LBS)	TREAD CONSTRUCTION
11R22.5*	14G	144/142L	26	6175	105	5840	105	8.25	7.50, 8.25	41.5	11.0	495	118	1S+4S
11R22.5*	16H	146/143L	26	6610	120	6005	120	8.25	7.50, 8.25	41.5	11.0	495	118	1S+4S
11R24.5*	14G	146/143L	26	6610	105	6005	105	8.25	7.50, 8.25	43.5	11.0	475	130	1S+4S
11R24.5*	16H	149/146L	26	7160	120	6610	120	8.25	7.50, 8.25	43.5	11.0	475	130	1S+4S
225/70R19.5^	14G	128/126N	19	3970	110	3750	110	6.75	6.00, 6.75	31.9	8.9	645	65	1S+3S
245/70R19.5	14G	133/131N	19	4540	110	4300	110	7.50	6.75, 7.50	33.0	9.8	624	72	1S+4S
295/75R22.5*	14G	144/141L	26	6175	110	5675	110	9.00	8.25, 9.00	39.9	11.7	510	115	1S+4S
295/75R22.5*	16H	146/143L	26	6610	120	6005	120	9.00	8.25, 9.00	39.9	11.7	510	115	1S+4S
285/75R24.5*	14G	144/141L	26	6175	110	5675	110	8.25	7.50, 8.25, 9.00	41.3	11.1	498	119	1S+4S
285/75R24.5*	16H	147/144L	26	6780	120	6175	120	8.25	7.50, 8.25, 9.00	41.3	11.1	498	119	1S+4S

*Select sizes are EPA SmartWay® verified
 ^3-belt construction

All specifications subject to change

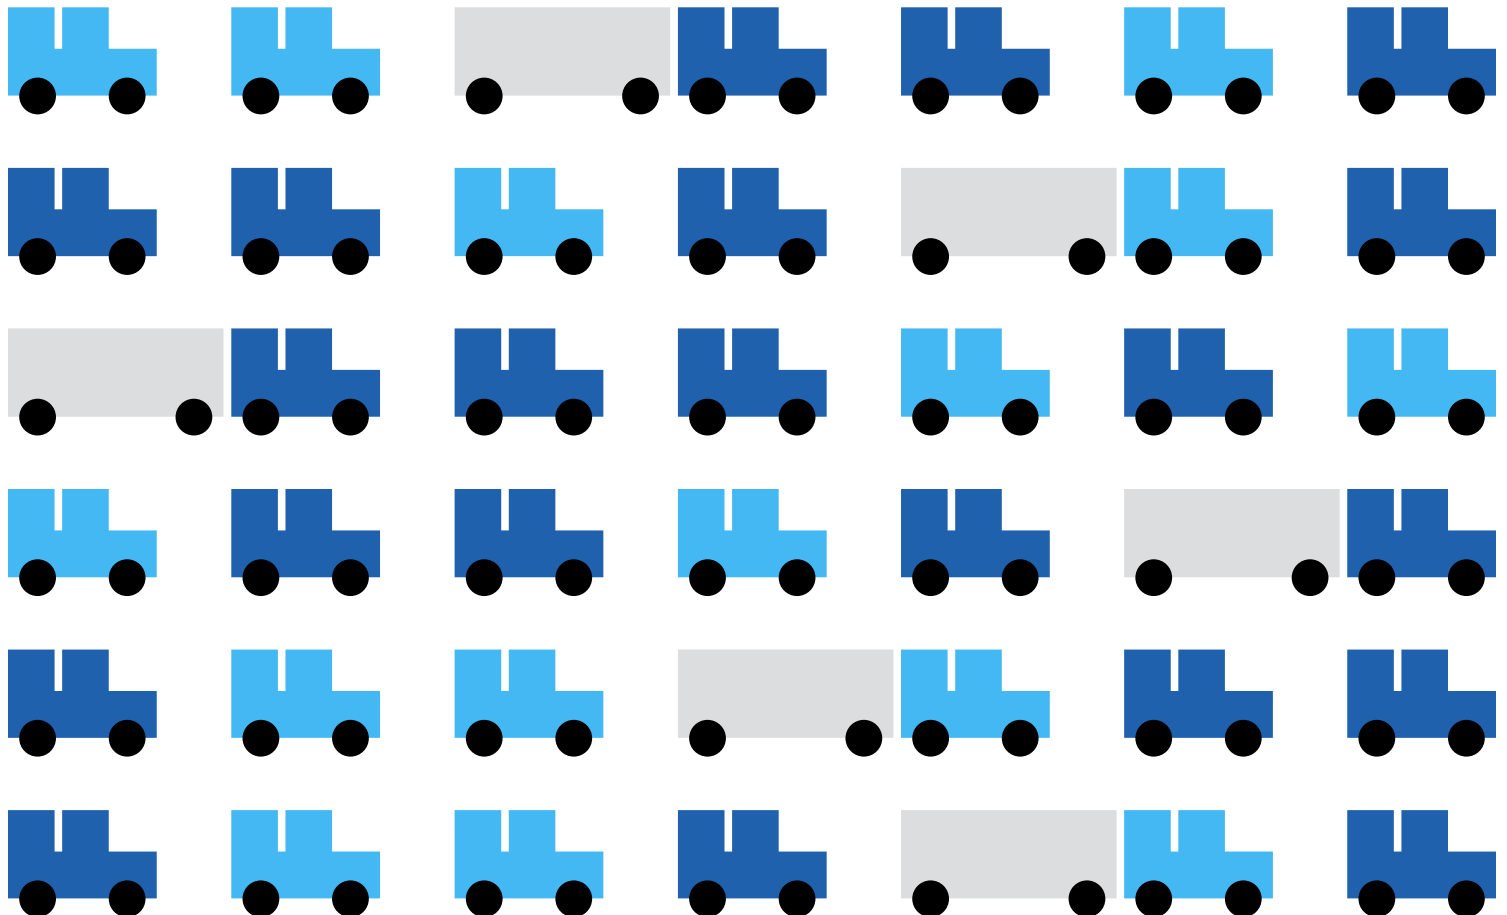

WINTER DRIVE

FDW802

A premium all-weather, drive tire designed to perform through snow and ice across regional highways and roads.



APPLICATION



KEY ATTRIBUTES



FEATURES & BENEFITS

1. Exceptional Ice & Snow Traction

Three main zigzag grooves and two auxiliary grooves ensure tread stiffness and handling

2. Superior Snow Removal

Open shoulder groove design increases snow removal and anti-sideslip capability of tire

3. Exceptional Wear Pattern

Tie-bar linked tread blocks prevent irregular wear when new, and full-depth, 3D siping helps maintain grip with age

4. Optimized Footprint

Engineered shoulder block ratio and tread design, combined with high tension steel belts, reduce tread deformation in the footprint, leading to better traction

5. Winter Tread Compound

3PMS-rated for enhanced performance in ice and snow.



**FORTUNE
TIRES** 

EXPECT MORE™

Open shoulder design
increases contact with road.

Contact a sales representative at
[fortunetireusa.com/dealer-contact](https://www.fortunetireusa.com/dealer-contact)



Scan to see our
full lineup

[fortunetireusa.com](https://www.fortunetireusa.com)






TIRE SIZE	PR/LOAD RANGE	LOAD SPEED INDEX	TREAD DEPTH (32ND)	MAX LOAD SINGLE (LBS)	MAX PRESSURE SINGLE (PSI)	MAX LOAD DUAL (LBS)	MAX PRESSURE DUAL (PSI)	MEASURING RIM	APPROVED RIM WIDTH (IN)	O.D. (IN)	S.W. (IN)	REVS/MILE	WEIGHT (LBS)	TREAD CONSTRUCTION
11R22.5	16H	146/143L	27	6610	120	6005	120	8.25	7.50, 8.25	41.9	11.0	497	130	1S+4S
11R24.5	16H	149/146L	27	7160	120	6610	120	8.25	7.50, 8.25	43.9	11.0	474	139	1S+4S
225/70R19.5^	14G	128/126N	21	3965	110	3745	110	6.75	6.00, 6.75	32.2	8.9	644	68	1S+3S
245/70R19.5	16H	135/133N	21	4805	120	4540	120	7.50	6.75, 7.50	33.3	9.8	627	81	1S+4S
295/75R22.5	16H	146/143L	27	6610	120	6005	120	9.00	8.25, 9.00	30.8	11.7	510	129	1S+4S

^3-belt construction

All specifications subject to change

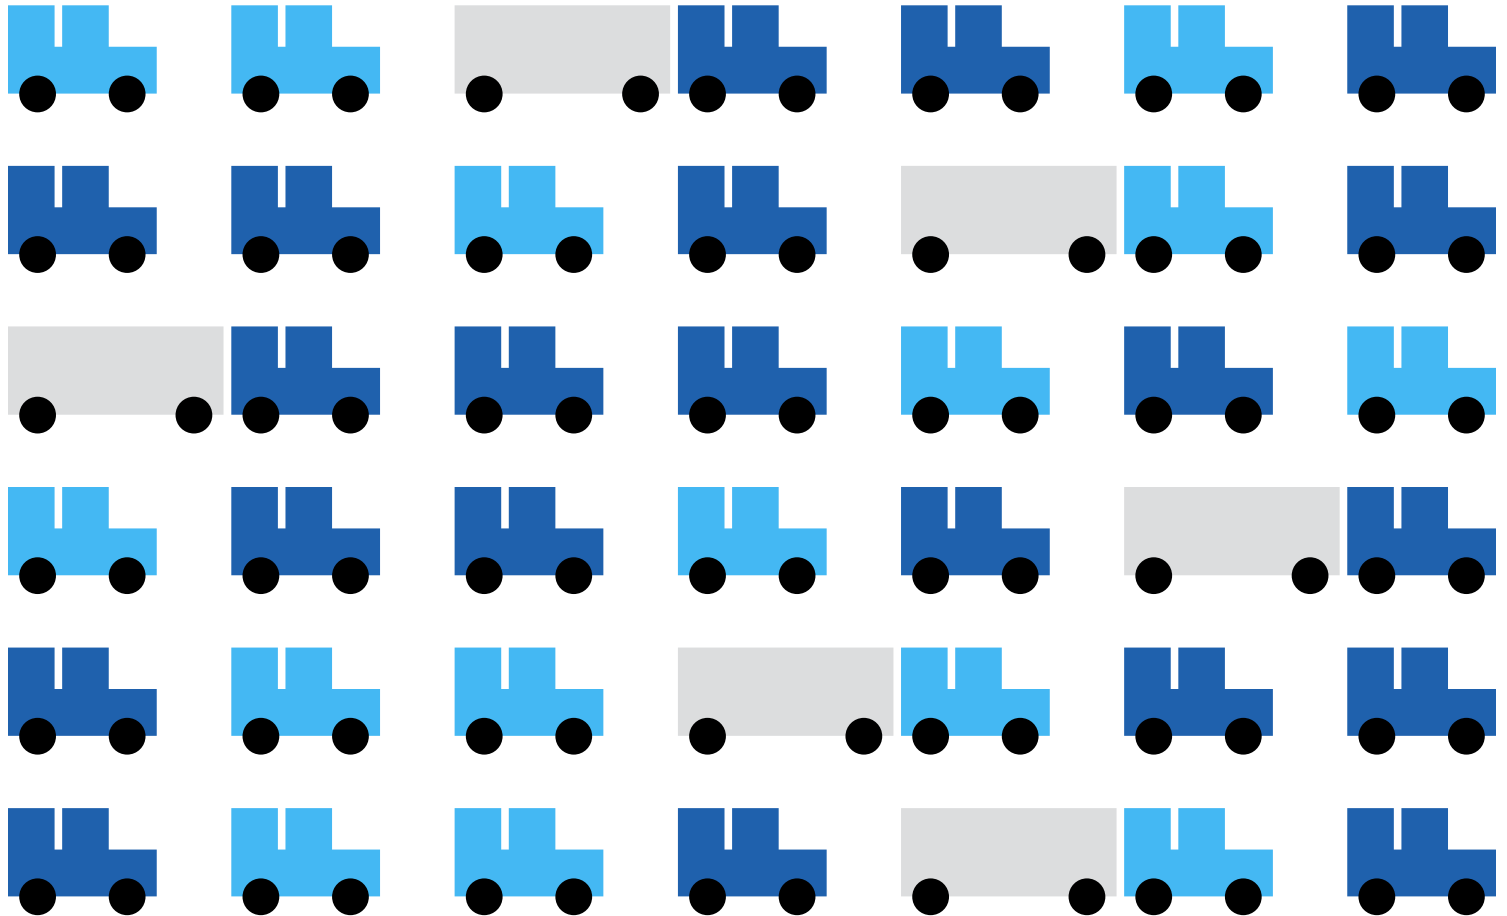

LONG HAUL TRAILER

FTH107^{ET}

A highly efficient, durable, all-season, long haul trailer tire that prioritizes stability and environmental responsibility.



APPLICATION



KEY ATTRIBUTES



FEATURES & BENEFITS

1. Extended Lifespan

Optimized shoulder design improves mileage over the life of the tire

2. Stone Drilling Protection

Stone ejectors effectively prevent stone drilling—preserving the casing and ensuring maximum retreadability

3. Enhanced Heat Dispersion

Unique siping helps tires run cooler

4. Streamlined Wear Pattern

Optimized footprint for low rolling resistance and even wear

5. Increased Wet Traction

5-rib / 4-groove design, maximizes water evacuation and braking in wet conditions



**FORTUNE
TIRES** 

EXPECT MORE™

EPA SmartWay® verified
for low-rolling resistance.



Scan to see our
full lineup

[fortunetireusa.com](https://www.fortunetireusa.com)


Contact a sales representative at
[fortunetireusa.com/dealer-contact](https://www.fortunetireusa.com/dealer-contact)





TIRE SIZE	PR/LOAD RANGE	LOAD SPEED INDEX	TREAD DEPTH (32ND)	MAX LOAD SINGLE (LBS)	MAX PRESSURE SINGLE (PSI)	MAX LOAD DUAL (LBS)	MAX PRESSURE DUAL (PSI)	MEASURING RIM	APPROVED RIM WIDTH (IN)	O.D. (IN)	S.W. (IN)	REVS/MILE	WEIGHT (LBS)	TREAD CONSTRUCTION
11R22.5	14G	144/142L	12	6175	105	5840	105	8.25	7.50, 8.25	41.5	11.0	507	104	1S+4S
11R24.5	14G	146/143L	12	6610	105	6005	105	8.25	7.50, 8.25	43.5	11.0	483	112	1S+4S
295/75R22.5	14G	144/141L	12	6175	110	5675	110	9.00	8.25, 9.00	39.9	11.7	524	100	1S+4S
285/75R24.5	14G	144/141L	12	6175	110	5675	110	8.25	7.50, 8.25, 9.00	41.3	11.1	507	105	1S+4S

All specifications subject to change

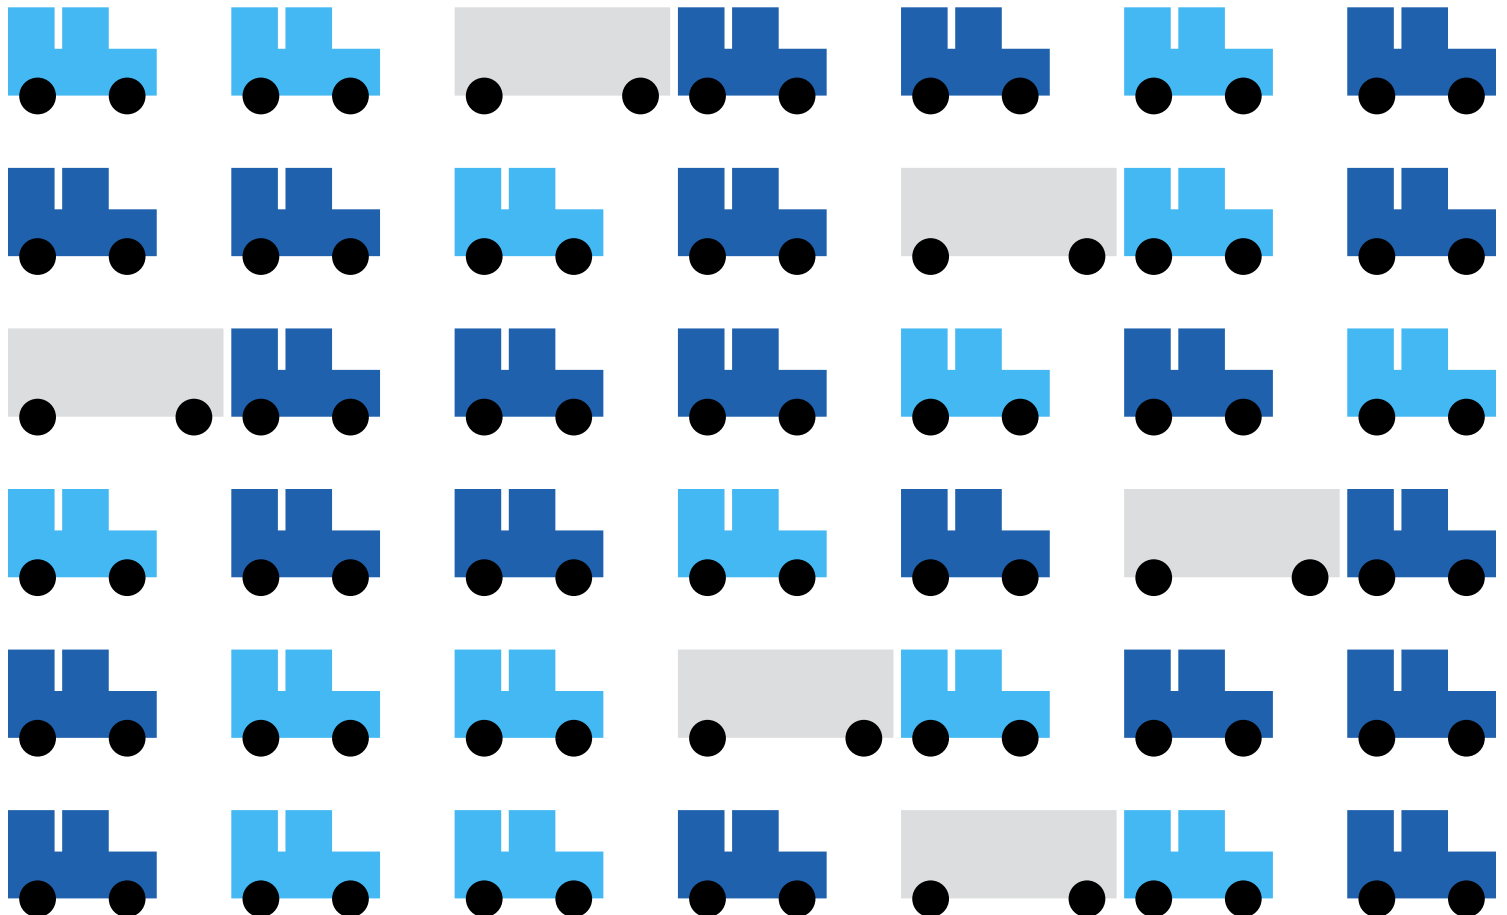

SEVERE SERVICE TRAILER

FTH102

A spread-axle trailer tire that is engineered for severe service, high-scrub, hauling conditions.



APPLICATION



KEY ATTRIBUTES



FEATURES & BENEFITS

1. Spread-Axle Optimized

Specialized shoulder design disperses lateral forces generated during sharp turning

2. Structurally Enhanced

Zigzag grooves improve stability of shoulder pattern blocks and minimize lateral force impact

3. Increased Wet Traction

Shoulder groove gradient design improves water dispersion

4. Stone Drilling Protection

Stone ejectors effectively prevent stone drilling—preserving the casing and ensuring maximum retreadability

5. High-Load Optimized

Big bead filler and high strength rim cushions handle heavy spread axle loads



**FORTUNE
TIRES** 

EXPECT MORE™

Advanced compound for high-scrub applications.

Contact a sales representative at fortunetireusa.com/dealer-contact



Scan to see our full lineup


fortunetireusa.com





TIRE SIZE	PR/LOAD RANGE	LOAD SPEED INDEX	TREAD DEPTH (32ND)	MAX LOAD SINGLE (LBS)	MAX PRESSURE SINGLE (PSI)	MAX LOAD DUAL (LBS)	MAX PRESSURE DUAL (PSI)	MEASURING RIM	APPROVED RIM WIDTH (IN)	O.D. (IN)	S.W. (IN)	REVS/MILE	WEIGHT (LBS)	TREAD CONSTRUCTION
11R22.5	14G	144/142L	16	6175	105	5840	105	8.25	7.50, 8.25	41.5	11.0	506	114	1S+4S
11R22.5	16H	146/143L	16	6610	120	6005	120	8.25	7.50, 8.25	41.5	11.0	506	114	1S+4S
11R24.5	14G	146/143L	16	6610	105	6005	105	8.25	7.50, 8.25	43.5	11.0	482	122	1S+4S
11R24.5	16H	149/146L	16	7160	120	6610	120	8.25	7.50, 8.25	43.5	11.0	482	122	1S+4S
255/70R22.5	16H	140/137L	16	5510	120	5070	120	7.50	7.50, 8.25	36.6	10.0	570	88	1S+4S
295/75R22.5	14G	144/141L	16	6175	110	5675	110	9.00	8.25, 9.00	39.9	11.7	520	110	1S+4S
295/75R22.5	16H	149/146L	16	7160	123	6610	123	9.00	8.25, 9.00	39.9	11.7	520	110	1S+4S

All specifications subject to change

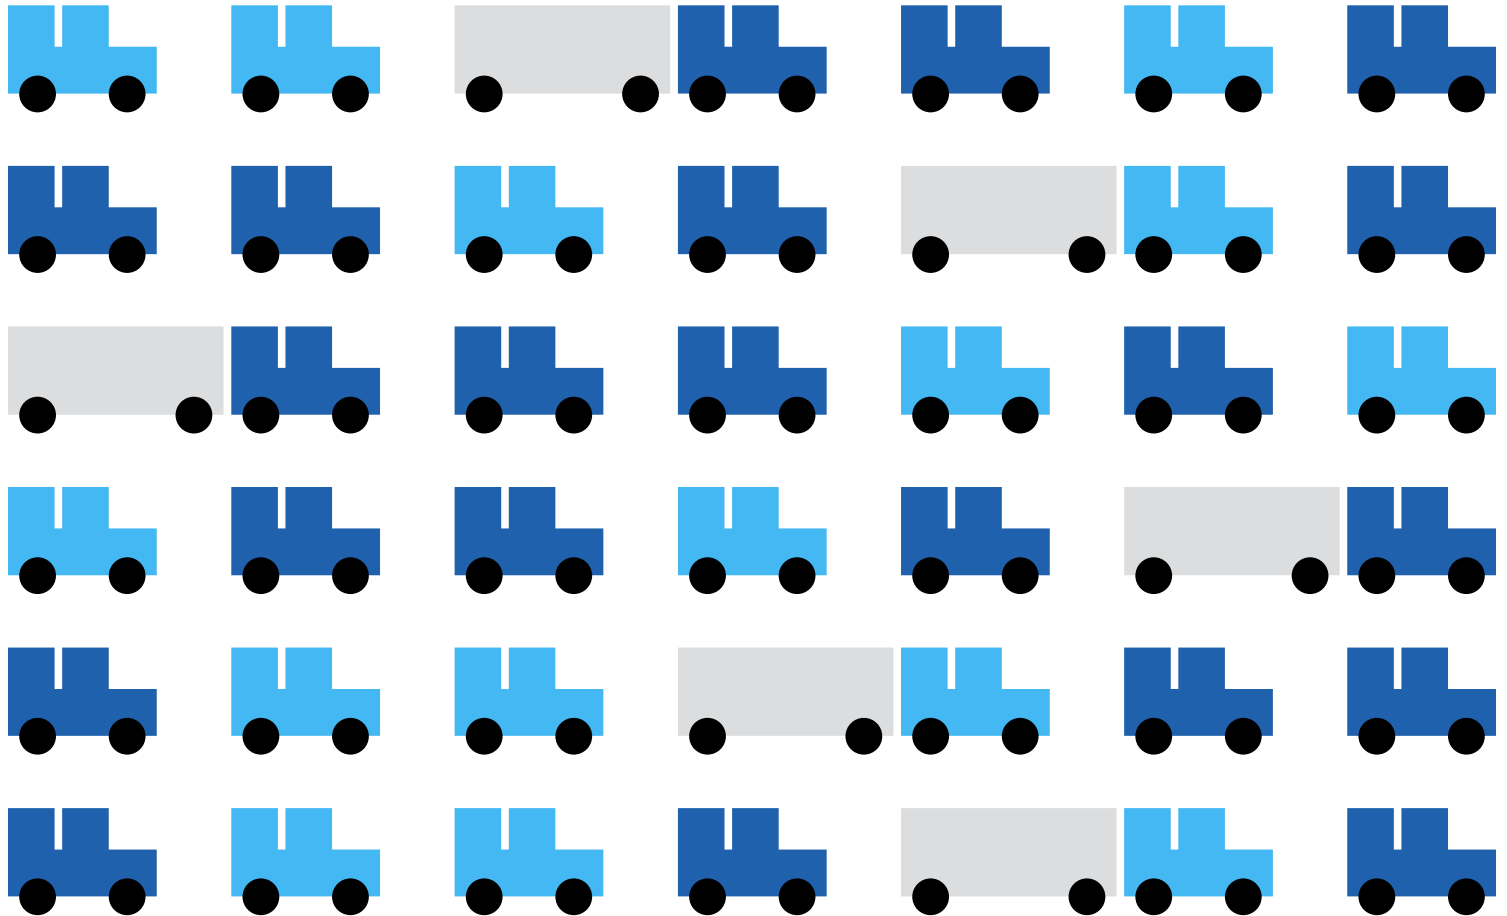

MIXED SERVICE

FAM210

A heavy-duty, all-position tire designed to be the workhorse of your on- and off-road mixed service fleet.



APPLICATION



KEY ATTRIBUTES



FEATURES & BENEFITS

- 1. Chip & Cut Resistant**
Special compound yields longer tire life and resistance to scrapes, chips, and cuts
- 2. Improved Wear Pattern**
Unique 4-rib pattern streamlines tread wear
- 3. Added Traction**
Zigzag design improves grip
- 4. Extended Lifespan**
Advanced wear resistant compound and low void ratio improve mileage over the life of the tire
- 5. Balanced Tread**
Optimized footprint for improved weight distribution



**FORTUNE
TIRES** 

EXPECT MORE™

Ideal for logging, mining, refuse, and concrete mixers.

Contact a sales representative at [fortunetireusa.com/dealer-contact](https://www.fortunetireusa.com/dealer-contact)



Scan to see our full lineup

[fortunetireusa.com](https://www.fortunetireusa.com)



FAM210


WARRANTY: 7-YEAR / 3-RETREAD



TIRE SIZE	PR/LOAD RANGE	LOAD SPEED INDEX	TREAD DEPTH (32ND)	MAX LOAD SINGLE (LBS)	MAX PRESSURE SINGLE (PSI)	MAX LOAD DUAL (LBS)	MAX PRESSURE DUAL (PSI)	MEASURING RIM	APPROVED RIM WIDTH (IN)	O.D. (IN)	S.W. (IN)	REVS/MILE	WEIGHT (LBS)	TREAD CONSTRUCTION
11R22.5	16H	146/143K	24	6610	120	6005	120	8.25	7.50, 8.25	41.5	11.0	499	119	1S+4S
11R24.5	16H	149/146K	24	7160	120	6610	120	8.25	7.50, 8.25	43.5	11.0	477	128	1S+4S
255/70R22.5*	16H	140/137L	22	5510	120	5070	120	7.50	7.50, 8.25	36.6	10.0	565	96	1S+4S
275/70R22.5	18J	148/145K	23	6940	120	6395	130	8.25	8.25, 9.00	37.7	10.9	543	113	1S+4S
315/80R22.5*	20L	161/157K	24	10000	130	9090	130	9.00	9.00, 9.75	42.4	12.3	485	147	1S+4S
315/80R22.5*^	20L	161/157K	22	10200	130	9090	130	9.00	9.00, 9.75	42.4	12.3	487	150	1S+4S

*M+S rated size
^FAM210 A 5-rib design

All specifications subject to change

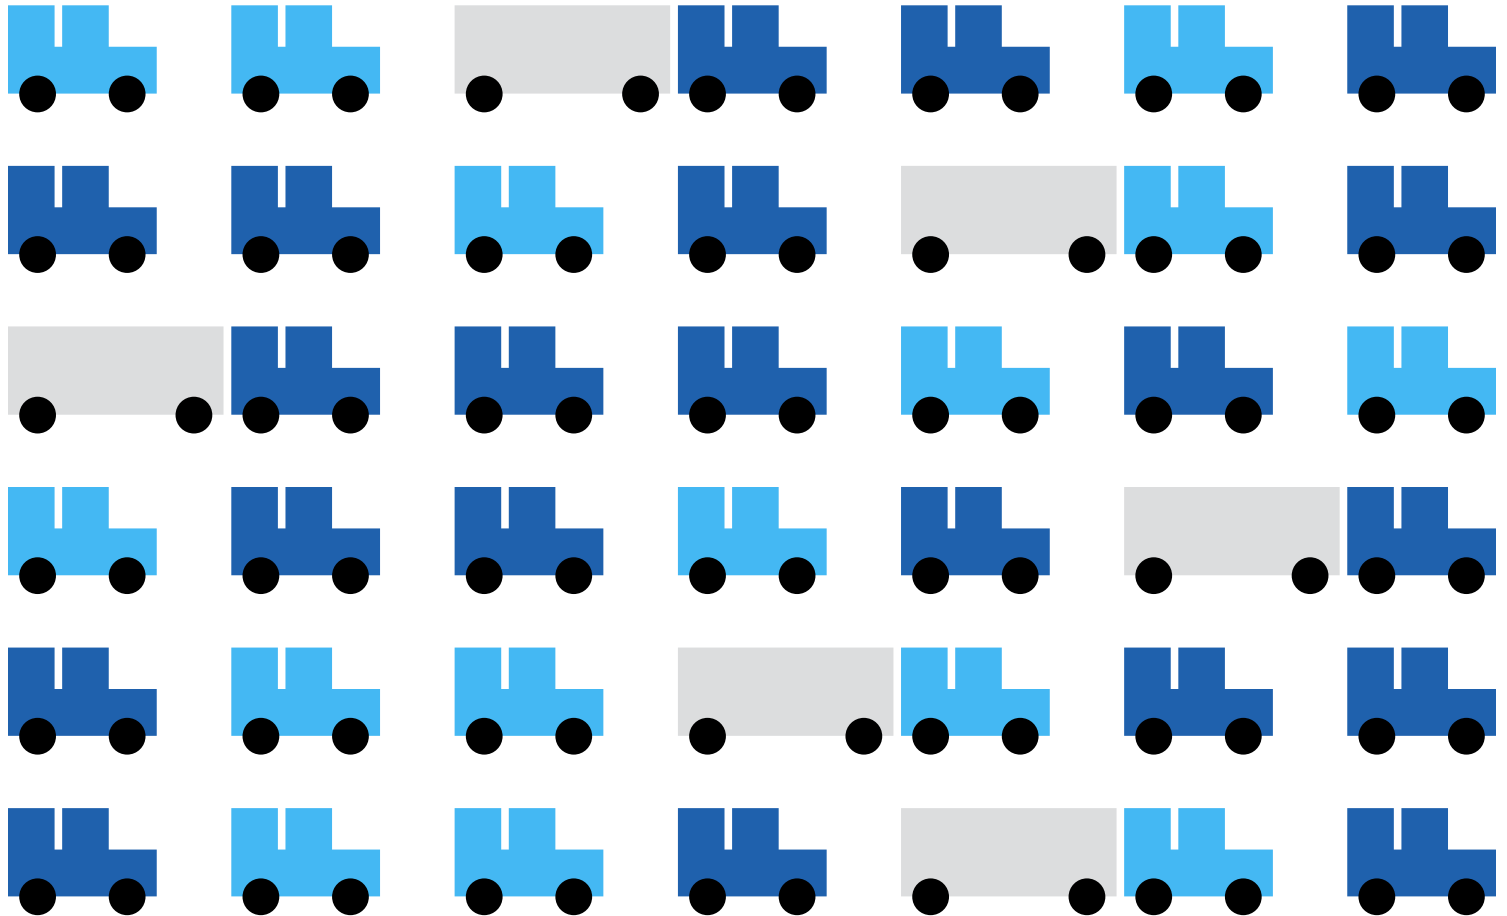

MIXED SERVICE

FAM211

A wide base, all-position, mixed service tire that handles on- or off-road assignments with ease.



APPLICATION



KEY ATTRIBUTES



FEATURES & BENEFITS

1. Chip & Cut Resistant

Special compound yields longer tire life and resistance to scrapes, chips, and cuts

2. Enhanced Heat Dispersion

Unique crown grooves help tires run cooler

3. Improved Wear Pattern

Tie-bar linked tread blocks prevent irregular wear

4. Improved Traction

Specialized tread blocks increase surface area and tire grip

5. Increased Durability

Robust 4-belt construction preserves the casing and ensures maximum retreadability

6. Improved Stability

445/65R22.5 features a zero degree steel belt for improved stability under heavy loads



**FORTUNE
TIRES** 

EXPECT MORE™

Ideal for logging, mining, refuse, and concrete mixers.



Scan to see our full lineup

[fortunetireusa.com](https://www.fortunetireusa.com)

Contact a sales representative at [fortunetireusa.com/dealer-contact](https://www.fortunetireusa.com/dealer-contact)






TIRE SIZE	PR/ LOAD RANGE	LOAD SPEED INDEX	TREAD DEPTH (32ND)	MAX LOAD SINGLE (LBS)	MAX PRESSURE SINGLE (PSI)	MAX LOAD DUAL (LBS)	MAX PRESSURE DUAL (PSI)	MEASURING RIM	APPROVED RIM WIDTH (IN)	O.D. (IN)	S.W. (IN)	REVS/ MILE	WEIGHT (LBS)	TREAD CONSTRUCTION
385/65R22.5	20L	160K	23	9920	130	NA	NA	11.75	11.75, 12.25	42.2	15.3	494	170	1S+4S
425/65R22.5	20L	165K	23	11400	120	NA	NA	12.25	11.75, 12.25, 13.00	44.3	16.6	470	195	1S+4S
445/65R22.5^	22M	169K	24	12800	130	NA	NA	13.00	13.00, 14.00	45.3	17.5	458	217	1S+5S

^5-belt construction

All specifications subject to change

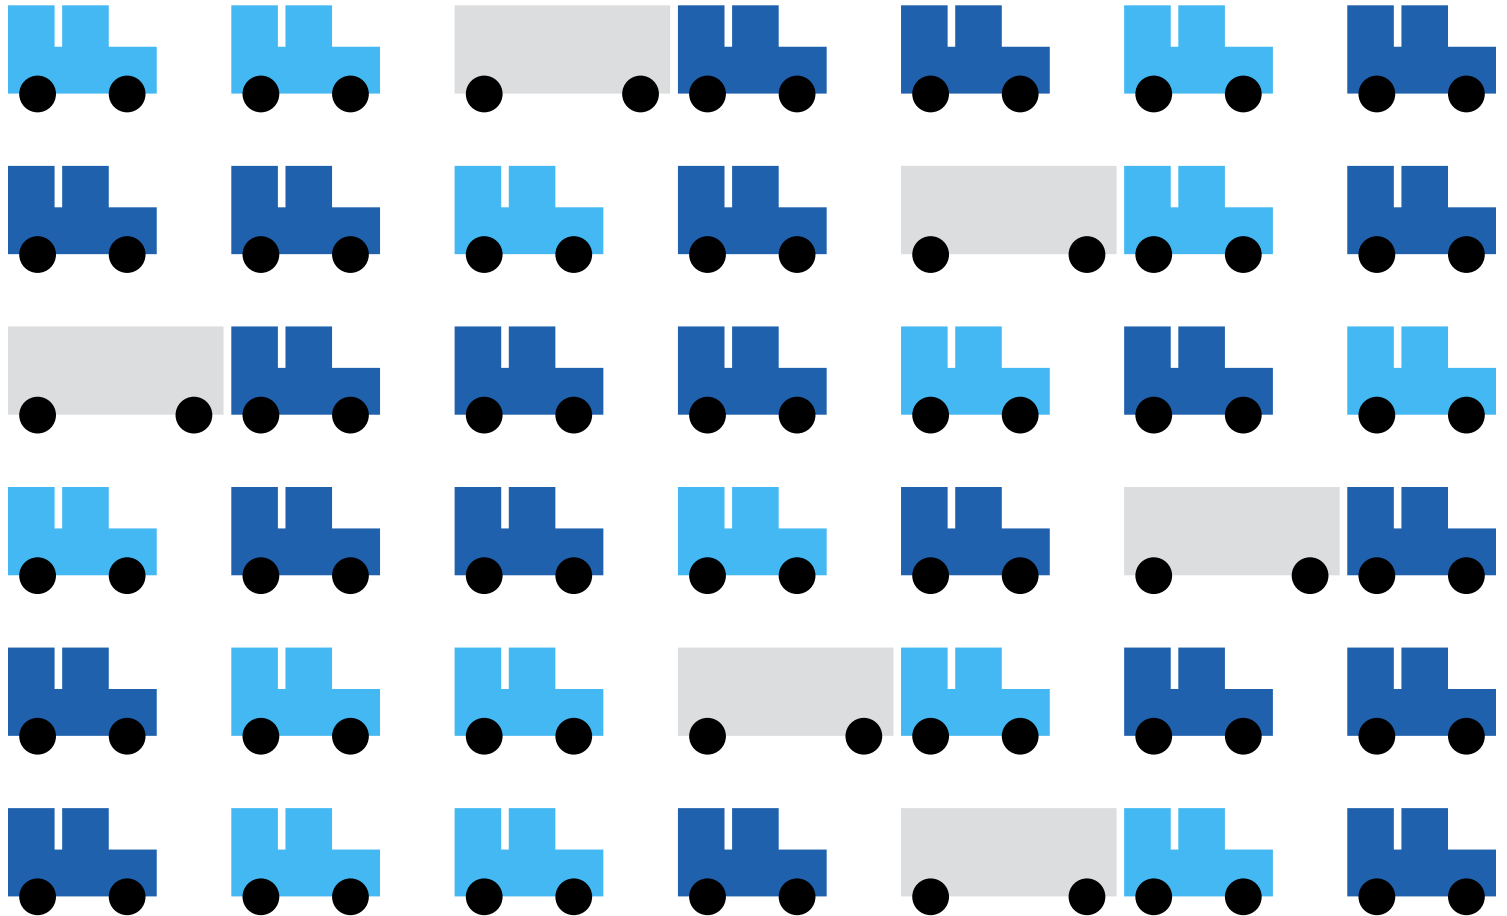

MIXED SERVICE

FDM212

The most aggressive all-weather, open-shoulder drive tire in our rugged mixed service lineup.



APPLICATION



KEY ATTRIBUTES



FEATURES & BENEFITS

- 1. Chip & Cut Resistant**
Special compound yields longer tire life and resistance to scrapes, chips, and cuts
- 2. Structurally Enhanced**
Casing design provides increased durability and optimal weight distribution
- 3. Aggressive Traction**
Extra-deep grooves facilitate maximum tire grip
- 4. Stone Drilling Protection**
Tread base design is effective in ejecting stones to prevent casing damage
- 5. Optimized Performance**
Low void design for enhanced driving performance in extreme conditions
- 6. Increased Durability**
Robust 4-belt construction preserves the casing and ensures maximum retreadability



**FORTUNE
TIRES** 

EXPECT MORE™

3PMS-rated for all weather conditions. Ideal for construction and logging vehicles.

Contact a sales representative at [fortunetireusa.com/dealer-contact](https://www.fortunetireusa.com/dealer-contact)



Scan to see our full lineup


[fortunetireusa.com](https://www.fortunetireusa.com)





TIRE SIZE	PR/LOAD RANGE	LOAD SPEED INDEX	TREAD DEPTH (32ND)	MAX LOAD SINGLE (LBS)	MAX PRESSURE SINGLE (PSI)	MAX LOAD DUAL (LBS)	MAX PRESSURE DUAL (PSI)	MEASURING RIM	APPROVED RIM WIDTH (IN)	O.D. (IN)	S.W. (IN)	REVS/MILE	WEIGHT (LBS)	TREAD CONSTRUCTION
11R22.5	16H	146/143K	29	6610	120	6005	120	8.25	7.50, 8.25	41.5	11.0	494	124	1S+4S
11R24.5	16H	149/146K	29	7160	120	6610	120	8.25	7.50, 8.25	43.5	11.0	476	134	1S+4S

All specifications subject to change

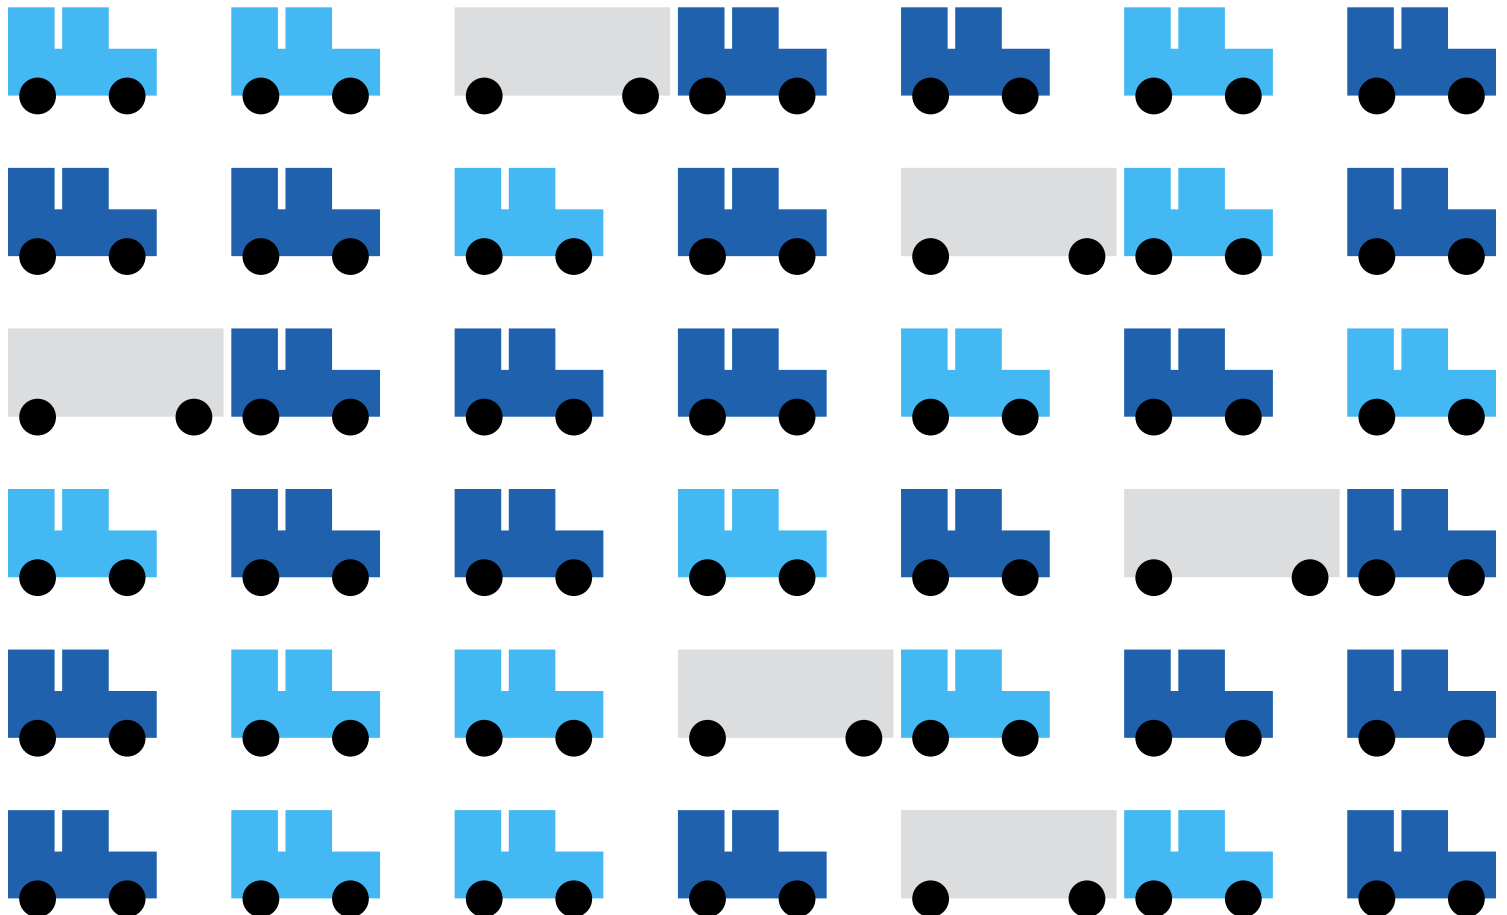

MIXED SERVICE

FDM213

Extra-deep treaded mixed service tire known for toughness, reliability, and efficiency.



APPLICATION



KEY ATTRIBUTES



FEATURES & BENEFITS

- 1. Chip & Cut Resistant**
Special compound yields longer tire life and resistance to scrapes, chips, and cuts
- 2. Optimized Tread Design**
Even wear distribution without sacrificing grip and stability
- 3. Stone Drilling Protection**
Stone ejector grooves effectively prevent stone drilling—preserving casing integrity and ensuring maximum retreadability
- 4. Superior Off-Road Traction**
Large pattern blocks and self-cleaning grooves provide stability through mud, gravel, and snow
- 5. Better Starts & Stops**
32/32nd tread depth extends tire life and reduces frequency of replacements



**FORTUNE
TIRES** 

EXPECT MORE™

Built to be a reliable,
durable work partner.



Scan to see our
full lineup

[fortunetireusa.com](https://www.fortunetireusa.com)


Contact a sales representative at
[fortunetireusa.com/dealer-contact](https://www.fortunetireusa.com/dealer-contact)





TIRE SIZE	PR/ LOAD RANGE	LOAD SPEED INDEX	TREAD DEPTH (32ND)	MAX LOAD SINGLE (LBS)	MAX PRESSURE SINGLE (PSI)	MAX LOAD DUAL (LBS)	MAX PRESSURE DUAL (PSI)	MEASURING RIM	APPROVED RIM WIDTH (IN)	O.D. (IN)	S.W. (IN)	REVS/ MILE	WEIGHT (LBS)	TREAD CONSTRUCTION
11R22.5	16H	146/143K	32	6610	120	6005	120	8.25	7.50, 8.25	41.5	11.0	493	136	1S+4S
11R24.5	16H	149/146K	32	7160	120	6610	120	8.25	7.50, 8.25	43.5	11.0	470	145	1S+4S

All specifications subject to change

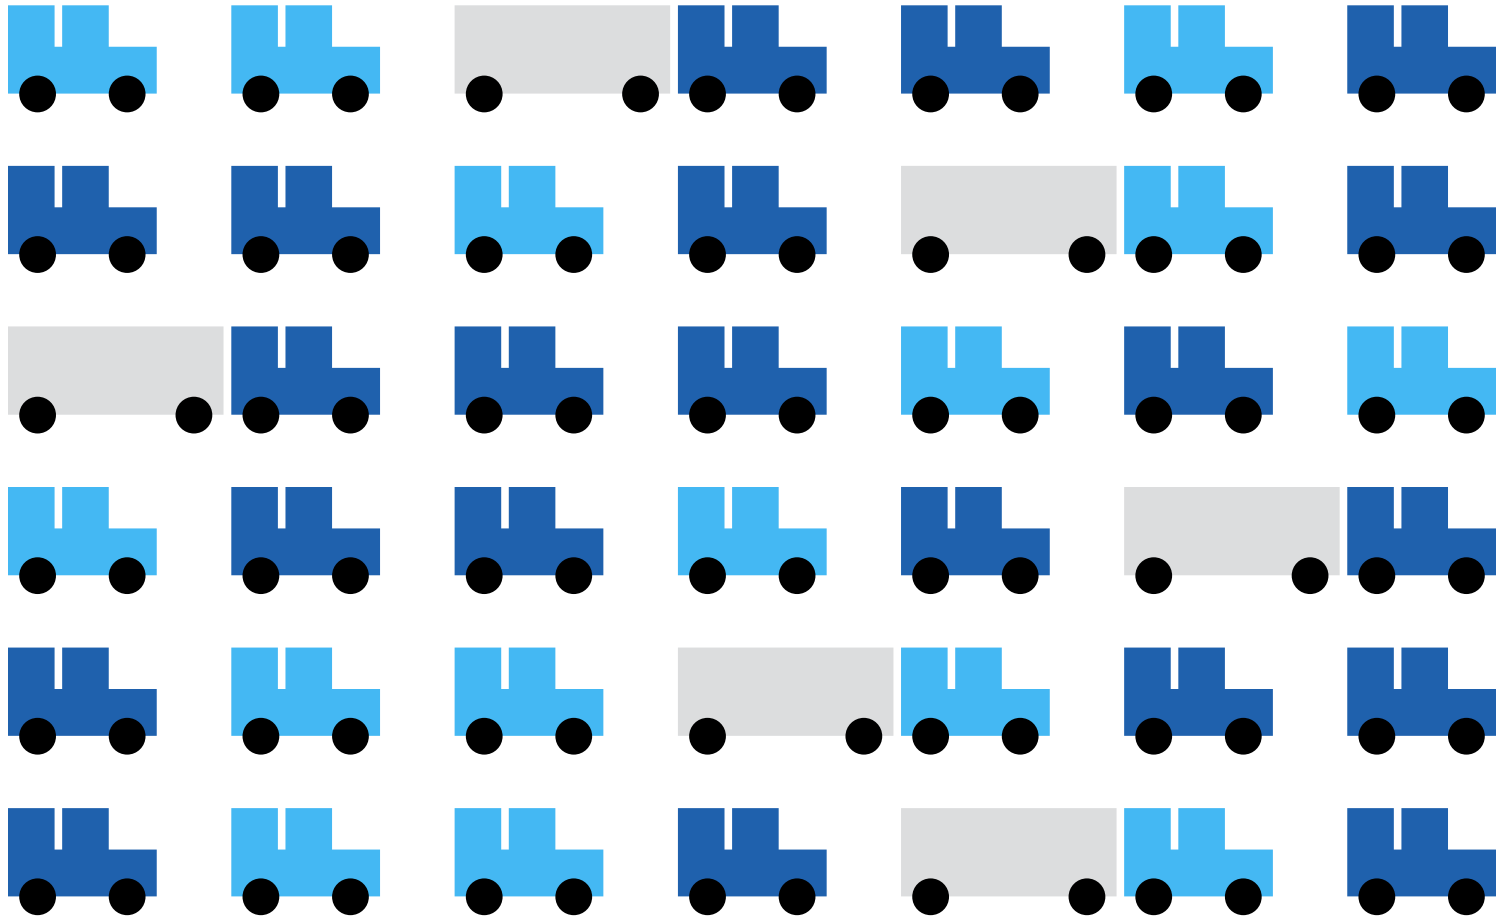

MIXED SERVICE

FDO305

Built for the toughest jobs and engineered for demanding mixed-service conditions across a wide range of applications.



APPLICATION



KEY ATTRIBUTES



FEATURES & BENEFITS

1. Chip & Cut Resistant

Specialized compound that enhances resistance to chip and cut while minimizing heat buildup to extend tread life.

2. Aggressive Traction Design


Large tread blocks and deep grooves deliver strong grip and stable handling across mixed and on/off-road surfaces.

3. Stone Ejection Protection

Integrated ejectors help prevent stone retention, protecting the casing and enhancing long-term durability.

4. Reinforced Bead Construction

Built to handle heavy loads by reducing stress and heat, improving durability and maximizing retreadability.

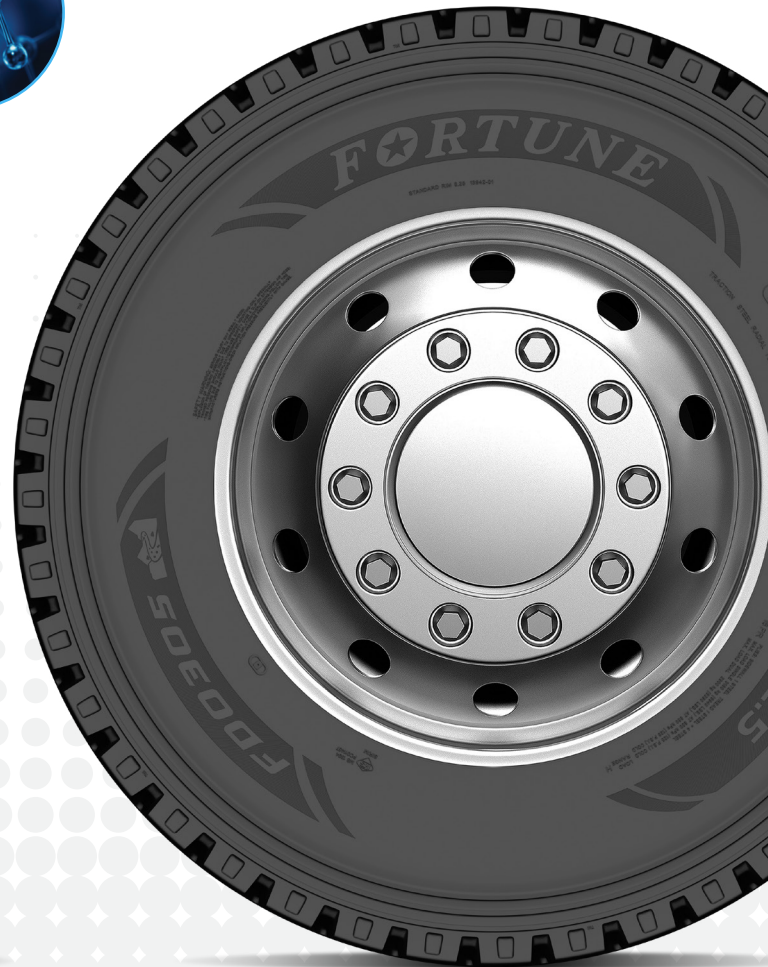

**FORTUNE
TIRES**

EXPECT MORE™

Designed to deliver reliable, on/off-road drive performance.



Scan to see our full lineup

[fortunetireusa.com](https://www.fortunetireusa.com)


Contact a sales representative at [fortunetireusa.com/dealer-contact](https://www.fortunetireusa.com/dealer-contact)





TIRE SIZE	PR/LOAD RANGE	LOAD SPEED INDEX	TREAD DEPTH (32ND)	MAX LOAD SINGLE (LBS)	MAX PRESSURE SINGLE (PSI)	MAX LOAD DUAL (LBS)	MAX PRESSURE DUAL (PSI)	MEASURING RIM	APPROVED RIM WIDTH (IN)	O.D. (IN)	S.W. (IN)	REVS/MILE	WEIGHT (LBS)	TREAD CONSTRUCTION
11R22.5	16H	148/145K	30	6940	125	6390	125	8.25	7.50, 8.25	41.5	11.0	506	133	1S+4S
11R24.5	16H	149/146K	30	7160	120	6610	120	8.25	7.50, 8.25	43.5	11.0	481	141	1S+4S

All specifications subject to change

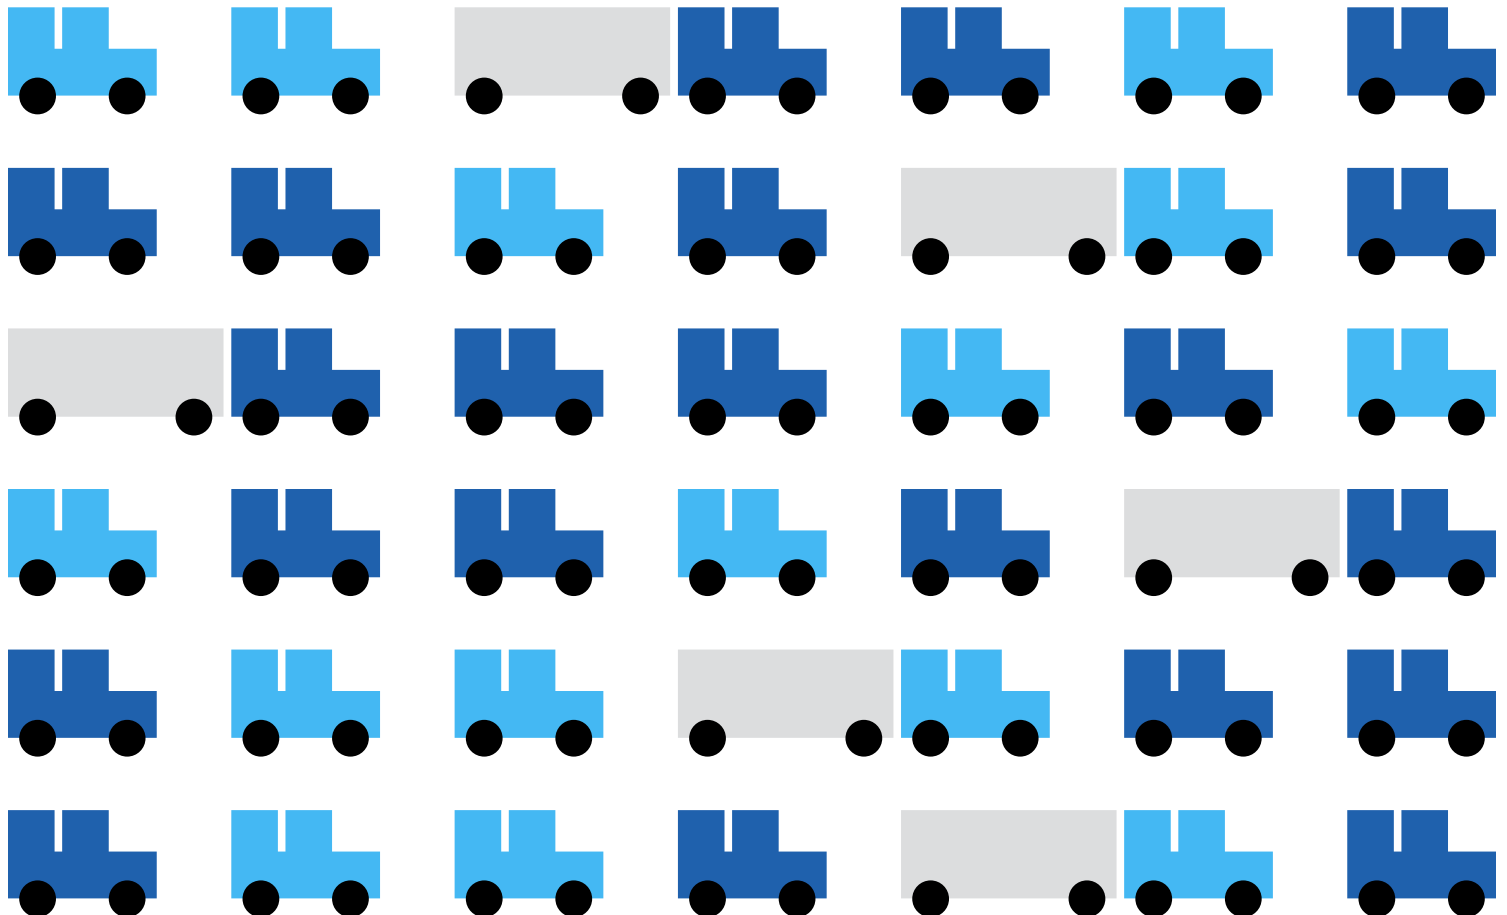

HEAVY DUTY TRAILER

FST02

A heavy duty, all-steel trailer tire with increased load-bearing capacity and outstanding durability.



KEY ATTRIBUTES



- For trailer use only

FEATURES & BENEFITS

1. Enhanced Durability

New polybutadiene rubber and optimized footprint shape ensures excellent wear-resistance performance

2. Increased Traction

Unique sipe distribution offers good tire traction, handling, and safety

3. Stone Drilling Resistant

Tread groove geometry reduces stone retention



**FORTUNE
TIRES** 

EXPECT MORE™

Increased load bearing capacity and durability.

Contact a sales representative at fortunetireusa.com/dealer-contact



Scan to see our full lineup

fortunetireusa.com



FST02

TIRE SIZE	PR/ LOAD RANGE	LOAD SPEED INDEX	TREAD DEPTH (32ND)	MAX LOAD SINGLE (LBS)	MAX PRESSURE SINGLE (PSI)	MAX LOAD DUAL (LBS)	MAX PRESSURE DUAL (PSI)	MEASURING RIM	APPROVED RIM WIDTH (IN)	O.D. (IN)	S.W. (IN)	REVS/ MILE	WEIGHT (LBS)	TREAD CONSTRUCTION
ST225/90R16	14G	129/125L	13	4080	110	3640	110	6.0	6.00 - 7.00	31.8	8.7	654	60	1S+3S
ST235/85R16	14G	132/127L	12	4400	110	3860	110	6.5	6.00 - 7.50	31.7	9.3	657	61	1S+3S
ST235/80R16	14G	129/125L	12	4080	110	3640	110	6.5	6.00 - 8.00	30.8	9.3	675	60	1S+3S

All specifications subject to change

