

CONSUMER TIRES

2025



**EXPECT
MORE**

FORTUNE
TIRES



TABLE OF CONTENTS

ABOUT US 2

PASSENGER

CLIMAFLEX 4S | ALL-WEATHER TOURING & CUV 4

PERFECTUS | ALL-SEASON PREMIUM TOURING & CUV 6

VIENTO | ALL-SEASON ULTRA HIGH-PERFORMANCE 8

SUV & LIGHT TRUCKS

TORMENTA H/T | ALL-SEASON HIGHWAY-TERRAIN 10

TORMENTA A/T² | ALL-WEATHER ALL-TERRAIN 12

TORMENTA R/T | ALL-SEASON RUGGED-TERRAIN 14

TORMENTA M/T | ALL-SEASON MUD-TERRAIN 16

COMMERCIAL VAN LT

TORMENTA LMD | ALL-WEATHER COMMERCIAL VAN LT 18

SPECIALTY TRAILER

ST RADIAL ST01 | SPECIALTY TRAILER 20

ST RADIAL FST02 | ALL-STEEL SPECIALTY TRAILER 22

WARRANTY 24

TIRE SAFETY 26

TIRE INFORMATION SERVICE BULLETIN 30

RETAILER LOCATOR SIGN-UP 32

USA PICKLEBALL SPONSORSHIP 34

MORE SALES, MORE VALUE

FORTUNE TIRES IS A GLOBAL TIRE MANUFACTURER DEDICATED TO DEVELOPING HIGH-QUALITY PRODUCTS, EXCLUSIVELY DISTRIBUTED IN THE UNITED STATES AND CANADA THROUGH PRINX CHENGSHAN TIRE NORTH AMERICA (PCTNA). AS A LEADER IN THE TIRE INDUSTRY WITH NEARLY 50 YEARS OF EXPERTISE, PCTNA ENSURES THAT ALL PRODUCTS MEET THE HIGHEST STANDARDS.

At Fortune Tires, our commitment is to deliver high-quality tires at a great value, create lasting relationships and enhance the overall driving experience for your customers. With nonstop innovation and emerging technologies, you can always **EXPECT MORE** from our product lineup. For unmatched quality and reliability, choose Fortune Tires.



EXPECT MORE, TOGETHER

MORE TIRES

We offer fitments for over 350 SKUs (and growing) to accommodate over 95% of vehicle models on the road today. This extensive lineup gives you more tire options at a great value to meet your customer needs for performance, safety and weather.

**AT THE END OF THE DAY,
YOU DESERVE MORE TIRE OPTIONS
AT A GREATER VALUE.**

MORE TRUST

At the core of our relationships are the values of trust, respect and unity. We believe in supporting the success of our dealers. You can always **EXPECT MORE** from us as a manufacturer.

MORE QUALITY

We pride ourselves on producing the highest quality tires at a greater value. Your customers will have peace of mind knowing every Fortune tire goes through rigorous testing before it's ever sent to you.



CLIMAFLEX 4S

ALL-WEATHER TOURING & CUV



**EXPECT
MORE**

FEATURES & BENEFITS:

- The ultimate all-weather tire engineered for durability and designated with the 3-Peak Mountain Snowflake rating indicating superior performance in wet and winter conditions
- Innovative “Fortune Four” tread pattern to enhance aesthetics without the sacrifice of performance
- Snow-traction enhancers in the central grooves offer increased winter capabilities and exceptional all-weather performance
- Advanced 3D siping ensures superior cornering and braking by enhancing tread rigidity, while full-depth sipes provides exceptional wet braking for the life of the tire
- Symmetric pattern ensures easy tire rotation, extending lifespan and saving on replacements



FITS

Touring & CUV

POPULAR FITMENTS

- Nissan Versa
- Honda CRV
- Kia Forte
- Toyota Corolla
- Ford Escape

WARRANTY

70,000 Mile / 110,000 KM
Limited Treadwear Warranty

TIRE SIZE	LOAD RANGE	LI/SR (SINGLE/DUAL)	UTQG	WEIGHT (LBS)	MEASURING RIM WIDTH (IN)	APPROVED RIM WIDTH (MIN-MAX)	MAX PRESSURE (PSI)	MAX LOAD SINGLE/DUAL (LBS)	OVERALL DIAMETER (IN)	SECTION WIDTH (IN)	TREAD DEPTH (32ND)	TREAD CONSTRUCTION
185/65R15	XL	92H	700 A A	18	5.5	5.0 - 6.0	50	1389	24.4	7.4	10.1	1N+2S+1P
195/65R15	SL	91H	700 A A	21	6.0	5.5 - 6.5	51	1356	25.0	7.9	10.5	1N+2S+1P
215/70R16	SL	100H	700 A A	28	6.5	6.0 - 7.0	51	1765	28.4	8.7	10.5	1N+2S+2P
235/70R16	SL	106H	700 A A	28	7.0	6.5 - 7.5	51	2095	29.5	9.4	10.5	1N+2S+2P
205/65R16	XL	99H	700 A A	23	6.0	5.5 - 6.5	50	1709	26.9	8.2	10.5	1N+2S+2P
215/65R16	XL	102H	700 A A	26	6.5	6.0 - 7.0	50	1874	27.4	8.7	10.5	1N+2S+2P
205/60R16	XL	96V	700 A A	21	6.0	5.5 - 6.5	50	1565	25.7	8.2	10.5	1N+2S+2P
215/60R16	SL	95H	700 A A	23	6.5	6.0 - 7.0	51	1521	26.1	8.7	10.5	1N+2S+2P
225/60R16	SL	98H	700 A A	25	6.5	6.0 - 7.0	51	1653	27.0	9.0	10.5	1N+2S+2P
205/55R16	SL	91H	700 A A	21	6.5	6.0 - 7.0	51	1356	24.9	8.4	10.5	1N+2S+1P
215/55R16	XL	97H	700 A A	23	7.0	6.5 - 7.5	50	1609	25.3	8.9	10.5	1N+2S+2P
215/65R17	SL	99H	700 A A	26	6.5	6.0 - 7.0	51	1710	28.4	8.7	10.5	1N+2S+2P
225/65R17	SL	102H	700 A A	28	6.5	6.0 - 7.0	51	1874	28.5	9.0	10.5	1N+2S+2P
235/65R17	XL	108V	700 A A	28	7.0	6.5 - 7.5	50	2205	29.1	9.4	10.5	1N+2S+2P
245/65R17	XL	111H	700 A A	29	7.0	6.5 - 7.5	50	2403	30.1	9.8	10.5	1N+2S+2P
215/60R17	SL	96H	700 A A	28	6.5	6.0 - 7.0	51	1565	27.6	8.7	10.5	1N+2S+2P
225/60R17	SL	99H	700 A A	26	6.5	6.0 - 7.0	51	1709	27.6	9.0	10.5	1N+2S+2P
235/60R17	SL	102H	700 A A	28	7.0	6.5 - 7.5	51	1874	28.5	9.4	10.5	1N+2S+2P
205/55R17	XL	95H	700 A A	28	6.5	6.0 - 7.0	50	1521	26.3	8.8	10.5	1N+2S+2P
215/55R17	XL	98V	700 A A	24	7.0	6.5 - 7.5	50	1653	26.3	8.9	10.5	1N+2S+2P
225/55R17	SL	97V	700 A A	25	7.0	6.5 - 7.5	51	1609	26.8	9.2	10.5	1N+2S+2P
235/55R17	XL	103V	700 A A	26	7.5	7.0 - 8.0	50	1929	27.2	9.6	10.5	1N+2S+2P
205/50R17	XL	93V	700 A A	28	6.5	6.0 - 7.0	50	1433	25.4	8.4	10.5	1N+2S+1P
215/50R17	XL	95V	700 A A	24	7.0	6.5 - 7.5	50	1521	25.8	8.9	10.5	1N+2S+2P
225/50R17	XL	98V	700 A A	24	7.0	6.5 - 7.5	50	1653	25.9	9.2	10.5	1N+2S+2P
235/50R17	SL	96V	700 A A	26	7.5	7.0 - 8.0	51	1565	26.7	9.6	10.5	1N+2S+2P
215/45R17	XL	91V	700 A A	21	7.0	6.5 - 7.5	50	1356	24.6	8.4	10.5	1N+2S+1P
225/45R17	XL	94V	700 A A	28	7.5	7.0 - 8.0	50	1477	25.3	8.9	10.5	1N+2S+1P
235/65R18	XL	110H	700 A A	31	7.0	6.5 - 7.5	50	2337	30.0	9.4	10.5	1N+2S+2P
255/65R18	SL	111H	700 A A	34	7.5	7.0 - 8.0	51	2403	31.6	10.2	10.5	1N+2S+2P
225/60R18	XL	104H	700 A A	27	6.5	6.0 - 7.0	50	1985	28.6	9.0	10.5	1N+2S+2P
235/60R18	XL	107V	700 A A	28	7.0	6.5 - 7.5	50	2149	29.1	9.4	10.5	1N+2S+2P
245/60R18	SL	105V	700 A A	31	7.0	6.5 - 7.5	51	2039	29.6	9.8	10.5	1N+2S+2P
255/60R18	SL	108H	700 A A	35	7.5	7.0 - 8.0	51	2205	30.0	10.2	10.5	1N+2S+2P
265/60R18	SL	110H	700 A A	37	8.0	7.5 - 8.5	51	2337	31.1	10.7	10.5	1N+2S+2P
215/55R18	XL	99V	700 A A	26	7.0	6.5 - 7.5	50	1710	27.7	8.9	10.5	1N+2S+2P
225/55R18	SL	98V	700 A A	26	7.0	6.5 - 7.5	51	1653	27.8	9.2	10.5	1N+2S+2P
235/55R18	XL	104V	700 A A	28	7.5	7.0 - 8.0	50	1984	28.5	9.6	10.5	1N+2S+2P
225/50R18	XL	99V	700 A A	28	7.0	6.5 - 7.5	50	1710	27.2	9.2	10.5	1N+2S+2P
235/50R18	XL	101V	700 A A	26	7.5	7.0 - 8.0	50	1819	27.3	9.6	10.5	1N+2S+2P
225/45R18	XL	95V	700 A A	25	7.5	7.0 - 8.0	50	1521	26.3	8.9	10.5	1N+2S+2P
235/45R18	XL	98V	700 A A	26	8.0	7.5 - 8.5	50	1653	26.3	9.3	10.5	1N+2S+2P
245/45R18	XL	100V	700 A A	29	8.0	7.5 - 8.5	50	1765	27.0	9.6	10.5	1N+2S+2P
225/40R18	XL	92V	700 A A	30	8.0	7.5 - 8.5	50	1389	25.4	9.1	10.5	1N+2S+1P
245/40R18	XL	97V	700 A A	29	8.5	8.0 - 9.0	50	1609	26.0	9.8	10.5	1N+2S+2P
255/60R19	XL	113V	700 A A	34	7.5	7.0 - 8.0	50	2535	31.6	10.2	10.5	1N+2S+2P
225/55R19	XL	103V	700 A A	28	7.0	6.5 - 7.5	50	1929	29.2	9.2	10.5	1N+2S+2P
235/55R19	XL	105V	700 A A	28	7.5	7.0 - 8.0	50	2039	29.2	9.6	10.5	1N+2S+2P
245/55R19	XL	107V	700 A A	31	7.5	7.0 - 8.0	50	2149	30.0	10.0	10.5	1N+2S+2P
235/50R19	XL	103V	700 A A	30	7.5	7.0 - 8.0	50	1929	28.7	9.6	10.5	1N+2S+2P
235/45R19	SL	95V	700 A A	27	8.0	7.5 - 8.5	51	1521	27.7	9.3	10.5	1N+2S+2P
245/45R19	XL	102V	700 A A	27	8.0	7.5 - 8.5	50	1874	28.0	9.6	10.5	1N+2S+2P
235/40R19	XL	96V	700 A A	26	8.5	8.0 - 9.0	50	1565	26.4	9.5	10.5	1N+2S+2P
235/55R20	SL	102V	700 A A	24	7.5	7.0 - 8.0	51	1874	30.2	9.6	10.5	1N+2S+2P
255/55R20	XL	110V	700 A A	35	8.0	7.5 - 8.5	50	2337	31.0	10.4	10.5	1N+2S+2P
275/55R20	XL	117H	700 A A	38	8.5	8.0 - 9.0	50	2833	31.9	10.8	10.1	1N+2S+2P
245/50R20	XL	105V	700 A A	32	7.5	7.0 - 8.0	50	2039	29.7	10.0	10.5	1N+2S+2P
255/50R20	XL	109V	700 A A	33	8.0	7.5 - 8.5	50	2271	30.5	10.4	10.5	1N+2S+2P
265/50R20	SL	107V	700 A A	34	8.5	8.0 - 9.0	51	2150	30.9	10.9	10.5	1N+2S+2P
255/45R20	XL	105V	700 A A	31	8.5	8.0 - 9.0	50	2040	29.4	10.0	10.5	1N+2S+2P
285/45R22	XL	114H	700 A A	38	9.5	9.0 - 10.0	50	2601	32.1	11.2	10.5	1N+2S+2P



PERFECTUS

ALL-SEASON PREMIUM TOURING & CUV

EXPECT MORE

FEATURES & BENEFITS:

- Asymmetrical tread design improves handling and performance when passing and cornering
- Four wide grooves improve traction and handling in wet conditions
- Unique siping and pattern design provides improved snow traction and braking in wet conditions
- Continuous rib design ensures stability and reduces abnormal wear
- Utilizes our PNS (Pattern Noise Simulation) technology for reduced road noise

FITS

Touring & CUV

POPULAR FITMENTS

- Nissan Versa
- Honda CRV
- Kia Forte
- Toyota Corolla
- Ford Escape

WARRANTY INFO

60,000 Mile / 95,000 KM
Limited Treadwear Warranty

TIRE SIZE	LOAD RANGE	LI/SR (SINGLE/DUAL)	UTQG	WEIGHT (LBS)	MEASURING RIM WIDTH (IN)	APPROVED RIM WIDTH (MIN-MAX)	MAX PRESSURE (PSI)	MAX LOAD SINGLE/DUAL (LBS)	OVERALL DIAMETER (IN)	SECTION WIDTH (IN)	TREAD DEPTH (32ND)	TREAD CONSTRUCTION
175/70R14	SL	84T	540 A A	16	5.0	4.5 - 6.0	44	1102	23.7	7.0	10	1N+2S+1P
195/70R14	SL	91T	600 A A	19	6.0	5.0 - 6.5	44	1356	24.8	7.9	10	1N+2S+2P
175/65R14	SL	82T	540 A A	15	5.0	5.0 - 6.0	44	1047	23.0	7.0	10	1N+2S+1P
185/65R14	SL	86H	540 A A	16	5.5	5.0 - 6.5	44	1168	23.5	7.4	10	1N+2S+1P
205/70R15	SL	96H	600 A A	22	6.0	5.0 - 7.0	44	1565	26.3	8.2	10	1N+2S+2P
215/70R15	SL	98T	600 A A	25	6.5	5.5 - 7.0	44	1653	26.9	8.7	10	1N+2S+1P
175/65R15	SL	84H	540 A A	16	5.0	5.0 - 6.0	44	1102	24.0	7.0	10	1N+2S+1P
185/65R15	SL	88H	540 A A	17	5.5	5.0 - 6.5	44	1235	24.4	7.4	10	1N+2S+1P
195/65R15	SL	91H	600 A A	19	6.0	5.5 - 7.0	44	1356	25.0	7.9	10	1N+2S+2P
205/65R15	XL	99H	600 A A	22	6.0	5.5 - 7.5	50	1709	25.5	8.2	10	1N+2S+1P
185/60R15	SL	84H	540 A A	16	5.5	5.0 - 6.5	44	1102	23.7	7.4	10	1N+2S+1P
195/60R15	SL	88H	600 A A	18	6.0	5.5 - 7.0	44	1235	24.2	7.9	10	1N+2S+1P
175/55R15	SL	77H	540 A A	16	5.5	5.0 - 6.0	44	908	22.6	7.2	10	1N+2S+1P
185/55R15	SL	82V	540 A A	17	6.0	5.0 - 6.5	44	1047	23.0	7.6	10	1N+2S+1P
195/55R15	SL	85V	600 A A	17	6.0	5.5 - 7.0	44	1135	23.4	7.9	10	1N+2S+1P
165/50R15	SL	72V	540 A A	14	5.0	4.5 - 5.5	44	783	21.5	6.7	10	1N+2S+1P
195/50R15	XL	86V	600 A A	17	6.0	5.5 - 7.0	50	1168	22.7	7.9	10	1N+2S+2P
205/70R16	SL	97H	600 A A	24	6.0	5.0 - 7.0	44	1609	27.3	8.2	10	1N+2S+2P
215/70R16	SL	100H	600 A A	26	6.5	5.5 - 7.0	44	1764	27.9	8.7	10	1N+2S+2P
225/70R16	SL	103H	600 A A	28	6.5	6.0 - 7.5	44	1929	28.4	9.0	10	1N+2S+2P
235/70R16	SL	106H	600 A A	30	7.0	6.0 - 8.0	44	2094	29.0	9.4	10	1N+2S+2P
205/65R16	SL	95H	600 A A	23	6.0	5.5 - 7.5	44	1521	26.5	8.2	10	1N+2S+2P
215/65R16	SL	98H	600 A A	24	6.5	6.0 - 7.5	44	1653	27.0	8.7	10	1N+2S+2P
225/65R16	SL	100H	600 A A	26	6.5	6.0 - 8.0	44	1764	27.5	9.0	10	1N+2S+2P
235/65R16	SL	103H	600 A A	27	7.0	6.5 - 8.5	44	1929	28.0	9.4	10	1N+2S+1P
205/60R16	SL	92V	600 A A	21	6.0	5.5 - 7.5	44	1389	25.7	8.2	10	1N+2S+2P
215/60R16	SL	95V	600 A A	23	6.5	6.0 - 7.5	44	1521	26.1	8.7	10	1N+2S+2P
225/60R16	SL	98V	600 A A	24	6.5	6.0 - 8.0	44	1653	26.6	9.0	10	1N+2S+2P
235/60R16	SL	100H	600 A A	26	7.0	6.5 - 8.5	44	1764	27.1	9.4	10	1N+2S+1P
185/55R16	SL	83H	540 A A	17	6.0	5.0 - 6.5	44	1074	24.0	7.6	10	1N+2S+1P
195/55R16	SL	87V	600 A A	18	6.0	5.5 - 7.0	44	1201	24.4	7.9	10	1N+2S+1P
205/55R16	XL	94V	600 A A	20	6.5	5.5 - 7.5	50	1477	24.9	8.4	10	1N+2S+2P
215/55R16	XL	97V	600 A A	22	7.0	6.0 - 7.5	50	1609	25.3	8.9	10	1N+2S+1P
195/50R16	SL	84V	600 A A	18	6.0	5.5 - 7.0	44	1102	23.7	7.9	10	1N+2S+2P
215/65R17	SL	99H	600 A A	25	6.5	6.0 - 7.5	44	1709	28.0	8.7	10	1N+2S+2P
225/65R17	SL	102H	600 A A	27	6.5	6.0 - 8.0	44	1874	28.5	9.0	10	1N+2S+2P
235/65R17	XL	108V	600 A A	28	7.0	6.5 - 8.5	50	2205	29.1	9.4	10	1N+2S+2P
215/100R17	XL	100H	600 A A	24	6.5	6.0 - 7.5	50	1764	27.2	8.7	10	1N+2S+2P
225/60R17	SL	99V	600 A A	26	6.5	6.0 - 8.0	44	1709	27.6	9.0	10	1N+2S+2P
235/60R17	SL	102V	600 A A	27	7.0	6.5 - 8.5	44	1874	28.1	9.4	10	1N+2S+2P
215/55R17	SL	94V	600 A A	22	7.0	6.0 - 7.5	44	1477	26.3	8.9	10	1N+2S+1P
225/55R17	SL	97V	600 A A	25	7.0	6.0 - 8.0	44	1609	26.8	9.2	10	1N+2S+2P
235/55R17	SL	99V	600 A A	26	7.5	6.5 - 8.5	44	1709	27.2	9.6	10	1N+2S+2P
205/50R17	XL	93V	600 A A	20	6.5	5.5 - 7.5	50	1433	25.1	8.4	10	1N+2S+1P
215/50R17	XL	95V	600 A A	22	7.0	6.0 - 7.5	50	1521	25.5	8.9	10	1N+2S+2P
225/50R17	XL	98V	600 A A	24	7.0	6.0 - 8.0	50	1653	25.9	9.2	10	1N+2S+2P
235/50R17	SL	96V	600 A A	25	7.5	6.5 - 8.5	44	1565	26.3	9.6	10	1N+2S+2P
245/50R17	SL	99V	600 A A	26	7.5	7.0 - 8.5	44	1709	26.7	10.0	10	1N+2S+2P
235/65R18	SL	106H	600 A A	30	7.0	6.5 - 8.5	44	2094	30.0	9.4	10	1N+2S+2P
255/65R18	SL	111H	600 A A	33	7.5	7.0 - 9.0	44	2403	31.1	10.2	10	1N+2S+2P
225/60R18	SL	100V	600 A A	27	6.5	6.0 - 8.0	44	1764	28.6	9.0	10	1N+2S+2P
235/60R18	SL	103V	600 A A	29	7.0	6.5 - 8.5	44	1929	29.1	9.4	10	1N+2S+2P
245/60R18	SL	105V	600 A A	30	7.0	7.0 - 8.5	44	2039	29.6	9.8	10	1N+2S+2P
215/55R18	SL	95V	600 A A	24	7.0	6.0 - 7.5	44	1521	27.3	8.9	10	1N+2S+2P
225/55R18	SL	98V	600 A A	26	7.0	6.0 - 8.0	44	1653	27.8	9.2	10	1N+2S+2P
235/55R18	SL	100V	600 A A	28	7.5	6.5 - 8.5	44	1764	28.1	9.6	10	1N+2S+2P
245/55R18	SL	103V	600 A A	28	7.5	7.0 - 8.5	44	1930	28.6	10.0	10	1N+2S+2P
235/50R18	SL	97V	600 A A	26	7.5	6.5 - 8.5	44	1609	27.3	9.6	10	1N+2S+2P
235/40R19	XL	96V	600 A A	25	8.5	8.0 - 9.5	50	1565	26.4	9.5	10	1N+2S+2P

60K

600 AA

540 AA

M+S

VIENTO

ALL-SEASON ULTRA HIGH-PERFORMANCE

EXPECT MORE

FEATURES & BENEFITS:

- Unique tread pattern design evacuates water, reduces hydroplaning and improves braking and wet handling performance
- The asymmetrical tread design, along with the higher speed ratings, improves handling and performance at highway speeds
- Utilizes our PNS (Pattern Noise Simulation) technology for reduced road noise and a quieter ride
- Nano Blend Compound ensures consistency of performance through the lifecycle
- Marked inside and outside for proper installation

FITS

High-Performance Vehicles

POPULAR FITMENTS

- Ford Mustang
- Tesla Model 3
- Toyota Camry
- Volkswagen Jetta
- Volvo S60

WARRANTY INFO

50,000 Mile / 80,000 KM Limited Treadwear Warranty

25,000 Mile / 40,000 KM for Staggered Fitments

TIRE SIZE	LOAD RANGE	LI/SR (SINGLE/DUAL)	UTQG	WEIGHT (LBS)	MEASURING RIM WIDTH (IN)	APPROVED RIM WIDTH (MIN-MAX)	MAX PRESSURE (PSI)	MAX LOAD SINGLE/DUAL (LBS)	OVERALL DIAMETER (IN)	SECTION WIDTH (IN)	TREAD DEPTH (32ND)	TREAD CONSTRUCTION
205/55ZR16	XL	94W	500 A A	19	6.5	5.5 - 7.5	50	1477	24.9	8.4	10	1N+2S+1P
215/55ZR16	XL	97W	500 A A	22	7.0	6.0 - 7.5	50	1609	25.3	8.9	10	1N+2S+2P
205/45ZR16	XL	87W	500 A A	19	7.0	6.5 - 7.5	50	1201	23.2	8.1	10	1N+2S+1P
215/55ZR17	SL	94W	500 A A	22	7.0	6.0 - 7.5	51	1477	26.3	8.9	10	1N+2S+1P
225/55ZR17	SL	97W	500 A A	25	7.0	6.0 - 8.0	44	1609	26.8	9.2	10	1N+2S+2P
235/55ZR17	SL	99W	500 A A	26	7.5	6.5 - 8.5	51	1709	27.2	9.6	10	1N+2S+2P
205/50ZR17	XL	93W	500 A A	20	6.5	5.5 - 7.5	50	1433	25.1	8.4	10	1N+2S+1P
215/50ZR17	XL	95W	500 A A	22	7.0	6.0 - 7.5	50	1521	25.5	8.9	10	1N+2S+2P
225/50ZR17	XL	98W	500 A A	24	7.0	6.0 - 8.0	50	1653	25.9	9.2	10	1N+2S+2P
205/45ZR17	XL	88W	500 A A	20	7.0	6.5 - 7.5	50	1235	24.3	8.1	10	1N+2S+1P
215/45ZR17	XL	91W	500 A A	20	7.0	7.0 - 8.0	50	1356	24.6	8.4	10	1N+2S+1P
225/45ZR17	XL	94W	500 A A	21	7.5	7.0 - 8.5	50	1477	25.0	8.9	10	1N+2S+1P
235/45ZR17	XL	97W	500 A A	24	8.0	7.5 - 9.0	50	1609	25.4	9.3	10	1N+2S+2P
245/45ZR17	XL	99Y	500 A A	25	8.0	7.5 - 9.0	50	1709	25.7	9.6	10	1N+2S+2P
245/40ZR17	XL	95W	500 A A	24	8.5	8.0 - 9.5	50	1521	24.7	9.8	10	1N+2S+2P
255/40ZR17	XL	98W	500 A A	23	9.0	8.5 - 10	50	1477	25.0	10.2	10	1N+2S+1P
275/40ZR17	XL	102W	500 A A	27	9.5	9.0 - 11.0	50	1875	25.7	10.9	10	1N+2S+2P
225/50ZR18	XL	95Y	500 A A	25	7.0	6.0 - 8.0	50	1521	26.9	9.2	10	1N+2S+2P
235/50ZR18	XL	101Y	500 A A	26	7.5	6.5 - 8.5	50	1819	27.3	9.6	10	1N+2S+2P
215/45ZR18	XL	93Y	500 A A	21	7.0	7.0 - 8.0	50	1433	25.6	8.4	10	1N+2S+1P
225/45ZR18	XL	95Y	500 A A	23	7.5	7.0 - 8.5	50	1521	25.9	8.9	10	1N+2S+2P
235/45ZR18	XL	98Y	500 A A	25	8.0	7.5 - 9.0	50	1653	26.3	9.3	10	1N+2S+2P
245/45ZR18	XL	100Y	500 A A	26	8.0	7.5 - 9.0	50	1764	27.3	9.6	10	1N+2S+2P
255/45ZR18	XL	103Y	500 A A	27	8.5	8.0 - 9.5	50	1709	27.0	10.0	10	1N+2S+2P
225/40ZR18	XL	92Y	500 A A	21	8.0	7.5 - 9.0	50	1389	25.1	9.1	10	1N+2S+1P
235/40ZR18	XL	95Y	500 A A	24	8.5	8.0 - 9.5	50	1521	25.4	9.5	10	1N+2S+2P
245/40ZR18	XL	97Y	500 A A	25	8.5	8.0 - 9.5	50	1609	25.7	9.8	10	1N+2S+2P
255/40ZR18	XL	99Y	500 A A	26	9.0	8.5 - 10.0	50	1709	26.0	10.2	10	1N+2S+2P
275/40ZR18	XL	103Y	500 A A	28	9.5	9.0 - 11.0	50	1929	26.7	10.9	10	1N+2S+2P
245/35ZR18	XL	92Y	500 A A	22	8.5	8.0 - 9.5	50	1389	24.8	9.5	10	1N+2S+1P
255/35ZR18	XL	94Y	500 A A	23	9.0	8.5 - 10.0	50	1477	25.0	10.2	10	1N+2S+1P
265/35ZR18	XL	97Y	500 A A	25	9.5	9.0 - 10.5	50	1609	25.3	10.7	10	1N+2S+2P
275/35ZR18	XL	99W	500 A A	26	9.5	9.0 - 11.0	50	1710	25.6	10.9	10	1N+2S+2P
245/45ZR19	XL	102Y	500 A A	27	8.0	7.5 - 9.0	50	1874	27.7	9.6	10	1N+2S+2P
225/40ZR19	XL	93Y	500 A A	22	8.0	7.5 - 9.0	50	1433	26.1	9.1	10	1N+2S+1P
245/40ZR19	XL	98Y	500 A A	26	8.5	8.0 - 9.5	50	1653	26.7	9.8	10	1N+2S+2P
255/40ZR19	XL	100Y	500 A A	26	9.0	8.5 - 10.0	50	1764	27.0	10.2	10	1N+2S+2P
275/40ZR19	XL	105Y	500 A A	29	9.5	9.0 - 11.0	50	2039	27.7	10.9	10	1N+2S+2P
235/35ZR19	XL	91Y	500 A A	22	8.5	8.0 - 9.5	50	1356	25.5	9.5	10	1N+2S+1P
245/35ZR19	XL	93Y	500 A A	23	8.5	8.0 - 9.5	50	1433	25.8	9.8	10	1N+2S+1P
255/35ZR19	XL	96Y	500 A A	25	9.0	8.5 - 10.0	50	1565	26.0	10.2	10	1N+2S+2P
275/35ZR19	XL	100Y	500 A A	28	9.5	9.0 - 11.0	50	1764	26.6	10.9	10	1N+2S+2P
285/35ZR19	XL	103Y	500 A A	29	10.0	9.5 - 11.0	50	1929	26.9	11.4	10	1N+2S+2P
265/30ZR19	XL	93Y	500 A A	24	9.5	9.0 - 10.0	50	1435	25.3	10.7	10	1N+2S+1P
305/30ZR19	XL	102Y	500 A A	29	11.0	10.5 - 11.5	50	1875	26.3	12.3	10	1N+2S+2P
245/45ZR20	XL	103Y	500 A A	28	8.0	7.5 - 9.0	50	1929	28.7	9.6	10	1N+2S+2P
255/45ZR20	XL	105Y	500 A A	29	8.5	8.0 - 9.5	50	2039	29.1	10.0	10	1N+2S+2P
245/40ZR20	XL	99Y	500 A A	27	8.5	8.0 - 9.5	50	1709	27.7	9.8	10	1N+2S+2P
245/35ZR20	XL	95Y	500 A A	24	8.5	8.0 - 9.5	50	1521	26.8	9.8	10	1N+2S+1P
255/35ZR20	XL	97Y	500 A A	26	9.0	8.5 - 10.0	50	1609	27.0	10.2	10	1N+2S+2P
285/30ZR20	XL	99Y	500 A A	28	10.0	9.5 - 10.5	50	1709	26.8	11.4	10	1N+2S+2P
235/30ZR22	XL	90W	500 A A	25	8.5	8.0 - 9.5	50	1325	27.6	9.5	10	1N+2S+1P
245/30ZR22	XL	92W	500 A A	26	8.5	8.0 - 9.0	50	1389	27.8	9.8	10	1N+2S+1P
255/30ZR22	XL	95W	500 A A	26	9.0	8.5 - 9.5	50	1520	28.1	10.2	10	1N+2S+1P
275/30ZR24	XL	101Y	500 A A	32	9.5	9.0 - 10.0	50	1820	30.6	10.9	10	1N+2S+2P

50K 500 AA M+S

TORMENTA H/T

ALL-SEASON HIGHWAY-TERRAIN

EXPECT MORE

FEATURES & BENEFITS:

- Designed for CUVs, SUVs and Light Trucks for long mileage and a smooth ride
- Multiple siping design features ensure all-season performance, shortened braking distances and improved safety and performance
- Central Dual Pitch design with PNS (Pattern Noise Simulation) technology reduces tire noise and improves ride comfort
- Four wide grooves improve traction and handling in wet conditions
- Utilizes dual steel belt with spiral wrap technology for improved uniformity and protection from heat buildup

FITS

CUV, SUV & Light Trucks

POPULAR FITMENTS

- Toyota RAV4
- Ford Expedition
- Chevrolet Suburban
- Kia Sorento
- Nissan Rogue

WARRANTY INFO

60,000 Mile / 95,000 KM
Limited Treadwear Warranty
for Metric Sizes

45,000 Mile / 70,000 KM
Limited Treadwear Warranty
for LT Sizes

TIRE SIZE	LOAD PR	LI/SR (SINGLE/DUAL)	UTQG LOAD RANGE	WEIGHT (LBS)	MEASURING RIM WIDTH (IN)	APPROVED RIM WIDTH (MIN-MAX)	MAX PRESSURE (PSI)	MAX LOAD SINGLE/DUAL (LBS)	OVERALL DIAMETER (IN)	SECTION WIDTH (IN)	TREAD DEPTH (32ND)	TREAD CONSTRUCTION
215/75R15	SL	100T	600 A B	27	6.0	5.5 - 7.0	44	1764	27.7	8.5	12	1N+2S+2P
225/75R15	SL	102T	600 A B	29	6.0	6.0 - 7.5	44	1874	28.3	8.8	12	1N+2S+2P
235/75R15	XL	109T	600 A B	30	6.5	6.0 - 8.0	50	2271	28.9	9.3	12	1N+2S+2P
225/70R15	SL	100T	600 A B	28	6.5	6.0 - 7.5	44	1764	27.4	9.0	12	1N+2S+2P
225/75R16	SL	104T	600 A B	30	6.0	6.0 - 7.5	44	1984	29.3	8.8	12	1N+2S+2P
235/75R16	XL	112T	600 A B	32	6.5	6.0 - 8.0	50	2469	29.8	9.3	12	1N+2S+2P
245/75R16	SL	111T	600 A B	35	7.0	6.5 - 8.0	44	2403	30.5	9.8	12	1N+2S+2P
265/75R16	SL	116T	600 A B	39	7.5	7.0 - 9.0	44	2756	31.7	10.5	12	1N+2S+2P
215/70R16	SL	100H	600 A B	27	6.5	5.5 - 7.0	44	1764	27.9	8.7	12	1N+2S+2P
235/70R16	SL	106T	600 A B	31	7.0	6.0 - 8.0	44	2094	29.0	9.4	12	1N+2S+2P
245/70R16	SL	107T	600 A B	33	7.0	6.5 - 8.0	44	2149	29.5	9.8	12	1N+2S+2P
255/70R16	SL	111T	600 A B	35	7.5	6.5 - 8.5	44	2403	30.1	10.2	12	1N+2S+2P
265/70R16	SL	112T	600 A B	36	8.0	7.0 - 9.0	44	2469	30.6	10.7	12	1N+2S+2P
245/70R17	SL	110T	600 A B	35	7.0	6.5 - 8.0	44	2337	30.6	9.8	12	1N+2S+2P
255/70R17	SL	112T	600 A B	36	7.5	6.5 - 8.5	44	2470	31.1	10.2	12	1N+2S+2P
265/70R17	SL	115T	600 A B	39	8.0	7.0 - 9.0	44	2679	31.7	10.7	12	1N+2S+2P
225/65R17	SL	102H	600 A B	28	6.5	6.0 - 8.0	44	1874	28.5	9.0	11	1N+2S+2P
235/65R17	XL	108H	600 A B	30	7.0	6.5 - 8.5	50	2205	29.1	9.4	11	1N+2S+2P
245/65R17	SL	107T	600 A B	32	7.0	7.0 - 8.5	44	2149	29.5	9.8	11	1N+2S+2P
265/65R17	SL	112T	600 A B	37	8.0	7.5 - 9.5	44	2469	30.6	10.7	12	1N+2S+2P
255/70R18	SL	113T	600 A B	38	7.5	6.5 - 8.5	44	2535	32.1	10.2	12	1N+2S+2P
265/70R18	SL	116T	600 A B	40	8.0	7.0 - 9.0	44	2756	32.6	10.7	12	1N+2S+2P
235/65R18	SL	106H	600 A B	31	7.0	6.5 - 8.5	44	2094	30.0	9.4	11	1N+2S+2P
255/65R18	SL	111H	600 A B	37	7.5	7.0 - 9.0	44	2403	31.1	10.2	12	1N+2S+2P
265/65R18	SL	114H	600 A B	39	8.0	7.5 - 9.5	44	2601	31.5	10.7	12	1N+2S+2P
275/65R18	SL	116T	600 A B	41	8.0	7.5 - 9.5	44	2756	32.1	11.0	12	1N+2S+2P
235/60R18	XL	107V	600 A B	30	7.0	6.5 - 8.5	50	2149	29.1	9.4	11	1N+2S+2P
245/60R18	SL	105H	600 A B	31	7.0	7.0 - 8.5	44	2039	29.6	9.8	11	1N+2S+2P
265/60R18	SL	110H	600 A B	36	8.0	7.5 - 9.5	44	2337	30.5	10.7	12	1N+2S+2P
255/55R18	SL	109V	600 A B	32	8.0	7.0 - 9.0	44	2039	29.0	10.4	12	1N+2S+2P
255/60R19	SL	109H	600 A B	36	7.5	7.0 - 8.5	44	2270	31.1	10.2	12	1N+2S+2P
225/55R19	SL	99V	600 A B	27	7.0	6.0 - 8.0	44	1709	28.8	9.2	11	1N+2S+2P
235/55R19	SL	101V	600 A B	29	7.5	6.5 - 8.5	44	1820	29.2	9.6	11	1N+2S+2P
245/55R19	SL	103V	600 A B	30	7.5	7.0 - 8.5	44	1930	29.6	10.0	11	1N+2S+2P
275/60R20	SL	115H	600 A B	42	8.0	7.5 - 9.5	44	2679	33.0	11.0	12	1N+2S+2P
235/55R20	SL	102V	600 A B	30	7.5	7.0 - 8.0	51	1875	30.2	9.6	11	1N+2S+2P
255/55R20	XL	110H	600 A B	35	8.0	7.0 - 9.0	50	2335	31.0	10.4	12	1N+2S+2P
275/55R20	SL	113H	600 A B	41	8.5	7.5 - 9.5	44	2535	31.9	11.2	12	1N+2S+2P
245/50R20	SL	102V	600 A B	32	7.5	7.0 - 8.5	44	1875	29.7	10.0	12	1N+2S+2P
265/50R20	XL	111T	600 A B	35	8.5	7.5 - 9.5	50	2403	30.5	10.9	12	1N+2S+2P
275/50R22	XL	115H	600 A B	41	8.5	8.0 - 9.0	50	2680	32.9	11.1	12	1N+2S+2P
285/45R22	XL	114H	600 A B	39	9.5	9.0 - 10.5	50	2601	32.1	11.2	11	1N+2S+2P
LT235/75R15	6PR	104/101S	C	34	6.5	6.0 - 7.0	50	1985/1820	28.9	9.3	13	1N+2S+2P
LT215/85R16	10PR	115/112R	E	35	6.0	5.5 - 7.0	80	2680/2470	30.4	8.5	13	1N+2S+2P
LT235/85R16	10PR	120/116S	E	40	6.5	6.0 - 7.5	80	3042/2778	31.7	9.3	13	1N+2S+2P
LT225/75R16	10PR	115/112S	E	35	6.0	6.0 - 7.0	80	2680/2470	29.3	8.8	13	1N+2S+2P
LT245/75R16	10PR	120/116S	E	39	7.0	6.5 - 8.0	80	3042/2778	30.5	9.8	13	1N+2S+2P
LT265/75R16	10PR	123/120S	E	44	7.5	7.0 - 8.0	80	3415/3085	31.7	10.5	15	1N+2S+2P
LT235/80R17	10PR	120/117R	E	40	6.5	6.0 - 8.0	80	3085/2835	31.8	9.3	13	1N+2S+2P
LT245/75R17	10PR	121/118S	E	41	7.0	6.5 - 8.0	80	3195/2910	31.5	9.8	13	1N+2S+2P
LT265/70R17	10PR	123/120S	E	45	8.0	7.0 - 8.5	80	3415/3085	31.7	10.7	15	1N+2S+2P
LT265/70R18	10PR	124/121S	E	49	8.0	7.0 - 9.0	80	3525/3195	32.6	10.7	15	1N+2S+2P
LT275/70R18	10PR	125/122S	E	51	8.0	7.0 - 8.5	80	3640/3305	33.2	11.0	15	1N+2S+2P
LT275/65R18	10PR	123/120S	E	50	8.0	7.5 - 9.0	80	3415/3085	32.1	11.0	15	1N+2S+2P
LT275/65R20	10PR	126/123S	E	53	8.0	7.5 - 9.5	80	3750/3415	34.1	11.0	15	1N+2S+2P
LT285/50R20	10PR	119/116S	E	47	9.0	8.5 - 10.0	80	3000/2755	31.3	11.7	13	1N+2S+2P

60K Metric **45K** LT **600** AB **M+S**

TORMENTA A/T²

ALL-WEATHER ALL-TERRAIN SUV/LT

**EXPECT
MORE**

FEATURES & BENEFITS:

- Aggressive tread design optimized for better traction and stability on all terrains, ensuring more control and safer rides
- Upgraded with a more aggressive sidewall treatment for increased durability, protecting against punctures and damage in rugged environments
- Dual pitch design with PNS technology reduces road noise
- 3PMS-rated for wet and wintry conditions
- Select sizes feature outline white lettering

FITS

SUV & Light Trucks

POPULAR FITMENTS

- Ford F150
- Ram 1500
- Toyota Tacoma
- Chevy Silverado
- Jeep Gladiator

WARRANTY INFO

50,000 Mile / 80,000 KM
Limited Treadwear Warranty

TIRE SIZE	LOAD PR	LI/SR (SINGLE/DUAL)	UTQG LOAD RANGE	WEIGHT (LBS)	MEASURING RIM WIDTH (IN)	APPROVED RIM WIDTH (MIN-MAX)	MAX PRESSURE (PSI)	MAX LOAD SINGLE/DUAL (LBS)	OVERALL DIAMETER (IN)	SECTION WIDTH (IN)	TREAD DEPTH (32ND)	TREAD CONSTRUCTION
235/75R15*	XL	109T	600 A A	33	6.5	6.0 - 7.5	50	2271	29.4	9.3	13	1N+2S+2P
245/75R16*	SL	111T	600 A A	34	7.0	6.5 - 7.5	51	2403	31.1	9.8	13	1N+2S+2P
265/75R16*	SL	116T	600 A A	39	7.5	7.0 - 8.0	51	2756	32.3	10.5	13	1N+2S+2P
245/75R17	SL	112T	600 A A	36	7.0	6.5 - 7.5	51	2469	32.1	9.8	13	1N+2S+2P
245/70R17	SL	110T	600 A A	39	7.0	6.5 - 7.5	51	2337	31.1	9.8	13	1N+2S+2P
265/70R17*	SL	115T	600 A A	41	8.0	7.5 - 8.5	51	2679	32.3	10.7	13	1N+2S+2P
225/65R17	XL	106T	600 A A	31	6.5	6.0 - 7.5	50	2094	29.0	9.0	13	1N+2S+2P
245/65R17*	XL	111T	600 A A	34	7.0	6.5 - 7.5	50	2403	30.1	9.8	13	1N+2S+2P
265/65R17*	SL	112T	600 A A	37	8.0	7.5 - 8.5	51	2469	31.1	10.7	13	1N+2S+2P
255/70R18	SL	113T	600 A A	46	7.5	7.0 - 8.0	51	2535	32.6	10.2	13	1N+2S+2P
265/65R18*	SL	114T	600 A A	42	8.0	7.5 - 8.5	51	2601	32.1	10.7	13	1N+2S+2P
275/65R18	SL	116T	600 A A	43	8.0	7.5 - 8.5	51	2756	32.6	11.0	14	1N+2S+2P
275/60R20	XL	116T	600 A A	60	8.0	7.5 - 8.5	51	2756	33.5	11.0	14	1N+2S+2P
275/55R20*	XL	117T	600 A A	68	8.5	8.0 - 9.0	50	2833	32.4	11.2	14	1N+2S+2P
LT235/85R16	10PR	120/116S	E	39	6.5	6.0 - 7.5	80	3085/2755	32.4	9.3	16	1N+2S+2P
LT225/75R16	10PR	115/112S	E	37	6.0	5.5 - 6.5	80	2680/2470	29.8	8.8	16	1N+2S+2P
LT245/75R16*	10PR	120/116S	E	46	7.0	6.5 - 7.5	80	3085/2755	31.0	9.8	16	1N+2S+2P
LT265/75R16*	10PR	123/120S	E	39	7.5	7.0 - 8.0	80	3415/3085	32.3	10.5	16	1N+2S+2P
LT285/75R16*	10PR	126/123R	E	54	8.0	7.5 - 8.5	80	3750/3415	33.5	11.3	17	1N+2S+2P
LT235/80R17	10PR	120/117R	E	37	6.5	6.0 - 7.5	80	3085/2835	32.4	9.3	16	1N+2S+2P
LT245/75R17	10PR	121/118R	E	44	7.0	6.5 - 7.5	80	3195/2910	32.0	9.8	16	1N+2S+2P
LT245/70R17	10PR	119/116S	E	44	7.0	6.5 - 7.5	80	3000/2755	31.1	9.8	16	1N+2S+2P
LT265/70R17*	10PR	123/120S	E	47	8.0	7.5 - 8.5	80	3415/3085	32.2	10.7	16	1N+2S+2P
LT285/70R17*	10PR	126/123S	E	54	8.5	8.0 - 9.0	80	3750/3415	33.4	11.5	17	1N+2S+2P
LT315/70R17	10PR	126/123S	E	59	9.5	9.0 - 10.0	80	3750/3415	35.1	12.7	17	1N+2S+2P
LT265/70R18*	10PR	124/121S	E	51	8.0	7.5 - 8.5	80	3525/3195	33.2	10.7	16	1N+2S+2P
LT275/70R18*	10PR	125/122S	E	44	8.0	7.5 - 8.5	80	3640/3305	33.8	11.0	16	1N+2S+2P
LT275/65R18*	10PR	123/120S	E	52	8.0	7.5 - 8.5	80	3415/3085	32.6	11.0	16	1N+2S+2P
LT325/65R18	10PR	127/124R	E	66	9.5	9.0 - 10.0	80	3860/3525	35.2	13.0	17	1N+2S+2P
LT275/65R20*	10PR	126/123S	E	54	8.0	7.5 - 8.5	80	3750/3415	34.6	11.0	16	1N+2S+2P
LT265/60R20	10PR	121/118S	E	56	8.0	7.5 - 8.5	80	3195/2910	33.0	10.7	16	1N+2S+2P
LT285/60R20	10PR	125/122Q	E	59	8.5	8.0 - 9.0	80	3640/3305	34.0	11.5	17	1N+2S+2P
LT325/60R20	10PR	126/123S	E	69	9.5	9.0 - 10.0	80	3750/3415	36.0	13.0	17	1N+2S+2P
LT285/55R20	10PR	122/119S	E	60	9.0	8.5 - 9.5	80	3305/3000	32.8	11.7	17	1N+2S+2P
LT305/55R20	12PR	125/122Q	F	56	9.5	9.0 - 10.0	95	3640/3305	33.8	12.4	17	1N+2S+2P
31X10.5015LT*	6PR	109S	C	44	8.5	8.0 - 9.0	50	2270	31.1	10.6	16	1N+2S+2P
35X12.50R17LT	12PR	128S	F	68	10.0	9.5 - 10.5	80	3970	35.2	12.5	17	1N+2S+2P
35X12.50R18LT	12PR	128S	F	72	10.0	9.5 - 10.5	95	3970	35.2	12.5	17	1N+2S+2P
33X12.50R20LT	12PR	119S	F	65	10.0	9.5 - 10.5	95	3000	33.0	12.5	17	1N+2S+2P
35X12.50R20LT	12PR	125S	F	70	10.0	9.5 - 10.5	95	3640	35.1	12.5	17	1N+2S+2P
35X12.50R22LT	12PR	121S	F	70	10.0	9.5 - 10.5	95	3195	35.0	12.5	17	1N+2S+2P
37X12.50R22LT	12PR	127S	F	72	10.0	9.5 - 10.5	95	3860	37.1	12.5	17	1N+2S+2P

* OWL Sidewall



TORMENTA R/T

ALL-SEASON RUGGED-TERRAIN SUV/LT



**EXPECT
MORE**

FEATURES & BENEFITS:

- Designed for SUVs and Light Trucks needing aggressive traction without sacrificing mileage
- Rugged 3-ply sidewall construction for protection in an off-road environment
- Mud rippers in between shoulder tread blocks offer additional mud and debris extraction
- Aggressive tread design features two-and three-step tread blocks for added stability and durability when in rugged-terrain
- Studdable using TSMI #15
- Mud movers in center tread blocks help clear mud and debris
- Opposing rugged sidewall designs provide two great looks and offer additional protection from rocks and debris when off-road



FITS

SUV & Light Trucks

POPULAR FITMENTS

- Ram 2500
- Jeep Gladiator
- Jeep Wrangler
- Ford Bronco
- Chevy Silverado

WARRANTY INFO

50,000 Mile / 80,000 KM
Limited Treadwear Warranty

TIRE SIZE	PR	LI/SR (SINGLE/DUAL)	LOAD RANGE	WEIGHT (LBS)	MEASURING RIM WIDTH (IN)	APPROVED RIM WIDTH (MIN-MAX)	MAX PRESSURE (PSI)	MAX LOAD SINGLE/DUAL (LBS)	OVERALL DIAMETER (IN)	SECTION WIDTH (IN)	TREAD DEPTH (32ND)	TREAD CONSTRUCTION
LT265/70R17	10PR	123/120Q	E	53	8.0	7.0 - 9.0	80	3415/3085	31.7	10.7	17	1N+2S+3P
LT285/70R17	10PR	126/123Q	E	58	8.5	7.5 - 9.5	80	3750/3415	32.8	11.5	17	1N+2S+3P
LT295/70R17	10PR	128/125Q	E	61	8.5	7.5 - 10.0	80	3970/3640	33.3	11.8	17	1N+2S+3P
LT265/65R17	10PR	120/117Q	E	50	8.0	8.0 - 9.5	80	3085/2835	30.6	10.7	17	1N+2S+3P
LT285/75R18	10PR	129/126Q	E	61	8.0	7.5 - 9.5	80	4080/3750	34.8	11.3	17	1N+2S+3P
LT265/70R18	10PR	124/121Q	E	56	8.0	7.0 - 9.0	80	3525/3195	32.6	10.7	17	1N+2S+3P
LT275/70R18	10PR	125/122Q	E	57	8.0	7.0 - 9.0	80	3640/3305	33.2	11.0	17	1N+2S+3P
LT295/70R18	10PR	129/126Q	E	61	8.5	7.5 - 10.0	80	4080/3750	34.3	11.8	17	1N+2S+3P
LT265/65R18	10PR	122/119Q	E	54	8.0	8.0 - 9.5	80	3305/3000	31.5	10.7	17	1N+2S+3P
LT275/65R18	10PR	123/120Q	E	57	8.0	8.0 - 9.5	80	3415/3085	32.1	11.0	17	1N+2S+3P
LT285/65R18	10PR	125/122Q	E	53	8.0	7.0 - 9.0	80	3640/3305	32.6	11.5	17	1N+2S+3P
LT265/60R18	10PR	119/116Q	E	58	8.5	7.5 - 9.5	80	3000/2755	30.5	10.7	17	1N+2S+3P
LT285/60R18	10PR	122/119Q	E	61	8.5	7.5 - 10.0	80	3305/3000	31.5	11.5	17	1N+2S+3P
LT275/65R20	10PR	126/123Q	E	59	8.0	8.0 - 9.5	80	3750/3415	34.1	11.0	17	1N+2S+3P
LT295/65R20	10PR	129/126Q	E	67	8.5	8.5 - 10.5	80	4080/3750	35.1	11.8	17	1N+2S+3P
LT275/60R20	10PR	123/120Q	E	58	8.0	8.0 - 9.5	80	3415/3085	33.0	11.0	17	1N+2S+3P
LT285/60R20	10PR	125/122Q	E	58	8.5	8.5 - 10.0	80	3640/3305	33.5	11.5	17	1N+2S+3P
LT295/60R20	10PR	126/123Q	E	60	8.5	8.5 - 10.5	80	3750/3415	33.9	11.8	17	1N+2S+3P
LT325/60R20	10PR	126/123Q	E	71	9.5	9.5 - 11.5	65	3750/3415	35.4	13.0	18	1N+2S+3P
LT275/55R20	10PR	120/117Q	E	58	8.5	8.0 - 9.5	80	3085/2835	31.9	11.2	17	1N+2S+3P
LT285/55R20	10PR	122/119Q	E	59	9.0	8.5 - 10.0	80	3305/3000	32.4	11.7	17	1N+2S+3P
LT295/55R20	10PR	123/120Q	E	62	9.5	8.5 - 10.5	80	3415/3085	32.8	12.2	17	1N+2S+3P
LT305/55R20	10PR	121/118Q	E	667	9.5	9.0 - 11.0	65	3195/2910	34.1	12.4	18	1N+2S+3P
LT265/50R20	10PR	115/112Q	E	52	8.5	8.0 - 9.5	80	2680/2470	30.5	10.9	17	1N+2S+3P
LT285/50R20	10PR	119/116Q	E	57	9.0	8.5 - 10.0	80	3000/2755	31.3	11.7	17	1N+2S+3P
LT285/50R22	10PR	121/118Q	E	62	9.0	8.5 - 10.0	80	3195/2910	33.3	11.7	17	1N+2S+3P
LT325/50R22	12PR	127Q	F	72	10.0	9.5 - 11.5	80	3860	34.8	13.2	18	1N+2S+3P
35X12.50R17LT	12PR	128Q	F	65	10.0	8.0 - 10.5	80	3970	34.5	12.5	18	1N+2S+3P
37X12.50R17LT	12PR	128Q	F	77	10.0	8.0 - 10.8	80	3970	36.5	12.5	18	1N+2S+3P
37X13.50R17LT	12PR	128Q	F	77	11.0	9.0 - 11.5	80	3970	36.5	13.6	18	1N+2S+3P
33X12.50R18LT	12PR	122Q	F	64	10.0	8.5 - 11.0	80	3305	32.5	12.5	18	1N+2S+3P
35X12.50R18LT	12PR	128Q	F	65	10.0	8.5 - 11.0	80	3970	34.5	12.5	18	1N+2S+3P
37X13.50R18LT	12PR	128Q	F	78	11.0	9.0 - 11.5	80	3970	36.5	13.6	18	1N+2S+3P
33X12.50R20LT	12PR	119Q	F	65	10.0	8.5 - 11.0	80	3000	32.5	12.5	18	1N+2S+3P
35X12.50R20LT	10PR	121Q	E	69	10.0	8.5 - 11.0	65	3195	34.5	12.5	18	1N+2S+3P
35X12.50R20LT	12PR	125Q	F	69	10.0	8.5 - 11.0	80	3640	34.5	12.5	18	1N+2S+3P
35X13.50R20LT	10PR	121Q	E	73	11.0	8.5 - 11.0	65	3195	34.5	13.6	18	1N+2S+3P
37X12.50R20LT	10PR	126Q	E	70	11.0	8.5 - 11.0	65	3750	36.5	12.5	18	1N+2S+3P
37X13.50R20LT	10PR	127Q	E	76	11.0	9.5 - 12.0	65	3860	36.5	13.6	18	1N+2S+3P
33X12.50R22LT	12PR	114Q	F	66	10.0	8.5 - 11.0	80	2600	32.5	12.5	18	1N+2S+3P
35X12.50R22LT	10PR	117Q	E	70	10.0	8.5 - 11.0	65	2835	34.5	12.5	18	1N+2S+3P
37X12.50R22LT	10PR	123Q	E	73	10.0	8.5 - 11.0	65	3415	36.5	12.5	18	1N+2S+3P
37X13.50R22LT	10PR	123Q	E	79	11.0	9.5 - 12.0	65	3415	36.5	13.6	18	1N+2S+3P
35X12.50R24LT	12PR	116Q	F	73	10.5	10.0 - 12.0	80	2755	34.5	12.5	18	1N+2S+3P
37X13.50R24LT	12PR	124Q	F	79	11.0	9.5 - 12.0	80	3525	36.5	13.6	18	1N+2S+3P
40X15.50R24LT	10PR	128Q	E	97	12.5	11.0 - 14.0	65	3970	39.5	15.6	18	1N+2S+3P



TORMENTA M/T

ALL-SEASON MUD-TERRAIN SUV/LT

**EXPECT
MORE**

FEATURES & BENEFITS:

- Studdable using TSMI #15
- Rugged 3-ply side wall construction for protection in an off-road environment
- Wide pattern and block design improves stability and wear resistance in harsh conditions
- Mud rippers in between shoulder tread blocks offer additional mud and debris extraction

FITS

SUV & Light Trucks

POPULAR FITMENTS

- Ram 2500
- Jeep Gladiator
- Jeep Wrangler
- Ford Bronco
- Ford F150

TIRE SIZE	PR	LI/SR (SINGLE/DUAL)	LOAD RANGE	WEIGHT (LBS)	MEASURING RIM WIDTH (IN)	APPROVED RIM WIDTH (MIN-MAX)	MAX PRESSURE (PSI)	MAX LOAD SINGLE/DUAL (LBS)	OVERALL DIAMETER (IN)	SECTION WIDTH (IN)	TREAD DEPTH (32ND)	TREAD CONSTRUCTION
LT235/75R15	8PR	110/107Q	D	40	6.5	6.0 - 8.0	65	2335/2150	28.9	9.3	18	1N+2S+2P
LT235/85R16	10PR	120/116Q	E	48	6.5	6.0 - 7.5	80	3042/2778	31.7	9.3	18	1N+2S+3P
LT245/75R16	10PR	120/116Q	E	48	7.0	6.5 - 8.0	80	3042/2778	30.5	9.8	18	1N+2S+3P
LT265/75R16	10PR	123/120Q	E	53	7.5	7.0 - 8.0	80	3415/3085	31.7	10.5	19	1N+2S+3P
LT285/75R16	10PR	126/123Q	E	60	8.0	7.5 - 9.0	80	3750/3415	32.8	11.3	20	1N+2S+3P
LT305/70R16	10PR	124/121Q	E	62	9.0	8.0 - 9.5	65	3525/3195	32.8	12.2	20	1N+2S+3P
LT265/70R17	10PR	123/120Q	E	54	8.0	7.0 - 8.5	80	3415/3085	31.7	10.7	19	1N+2S+3P
LT285/70R17	10PR	126/123Q	E	61	8.5	7.5 - 9.0	80	3750/3415	32.8	11.5	20	1N+2S+3P
LT275/65R18	10PR	123/120Q	E	58	8.0	8.0 - 9.5	80	3415/3085	32.1	11.0	19	1N+2S+3P
LT305/55R20	10PR	121/118Q	E	66	9.5	9.0 - 11.0	65	3195/2910	33.2	12.4	20	1N+2S+3P
LT325/50R22	10PR	122Q	E	73	10.0	9.5 - 11.5	65	3305	34.8	13.2	20	1N+2S+3P
31X10.50R15LT	6PR	109Q	C	48	8.5	7.0 - 9.0	50	2270	30.5	10.6	20	1N+2S+2P
33X12.50R15LT	6PR	108Q	C	62	10.0	8.5 - 11.0	35	2205	32.5	12.5	20	1N+2S+3P
35X12.50R17LT	12PR	128Q	F	68	10.0	8.5 - 11.0	65	3195	34.5	12.5	20	1N+2S+3P
33X12.50R18LT	10PR	118Q	E	66	10.0	8.5 - 11.0	65	2910	32.5	12.5	20	1N+2S+3P
35X12.50R18LT	10PR	123Q	E	69	10.0	8.5 - 11.0	65	3415	34.5	12.5	20	1N+2S+3P
33X12.50R20LT	10PR	114Q	E	66	10.0	8.5 - 11.0	65	2600	32.5	12.5	20	1N+2S+3P
33X12.50R20LT	12PR	119Q	F	66	10.0	8.5 - 11.0	80	3000	32.5	12.5	20	1N+2S+3P
35X12.50R20LT	10PR	121Q	E	71	10.0	8.5 - 11.0	65	3195	34.5	12.5	20	1N+2S+3P
35X12.50R20LT	12PR	125Q	F	71	10.0	8.5 - 11.0	80	3640	34.5	12.5	20	1N+2S+3P
37X12.50R20LT	12PR	128Q	F	73	10.0	8.5 - 11.0	80	3970	36.5	12.5	20	1N+2S+3P
37X13.50R20LT	10PR	127Q	E	81	11.0	8.5 - 11.0	65	3860	36.5	13.6	21	1N+2S+3P
37X13.50R20LT	12PR	128Q	F	81	11.0	8.5 - 11.0	80	3970	36.5	13.6	21	1N+2S+3P
33X12.50R22LT	10PR	109Q	E	65	10.0	8.5 - 11.0	65	2270	32.5	12.5	19	1N+2S+3P
35X12.50R22LT	12PR	121Q	F	70	10.0	8.5 - 11.0	80	3195	34.5	12.5	20	1N+2S+3P
37X12.50R22LT	12PR	127Q	F	76	10.0	8.5 - 11.0	80	3860	36.5	12.5	20	1N+2S+3P
37X13.50R22LT	12PR	128Q	F	82	11.0	9.5 - 12.0	80	3970	36.5	13.6	21	1N+2S+3P



TORMENTA LMD

ALL-WEATHER COMMERCIAL VAN LT

**EXPECT
MORE**

FEATURES & BENEFITS:

- Four central-wide grooves for excellent water evacuation in wet conditions
- Features high-depth sipes with multiple biting edges to improve driving safety in various road conditions
- Specialized tread compound to combat scratches, chips and cuts in a high scrub application
- Strengthened sidewall construction for improved load capability and durability against curb damage
- Thicker under-tread combined with a reinforced belt design to prevent punctures and ensure driving safety
- Tie-bar linked tread blocks with optimized shoulder blocks increases footprint to prevent irregular wear
- 3-Peak Mountain Snowflake rated for all-weather conditions

FITS

Commercial Vans & Light Trucks

POPULAR FITMENTS

- Ford Transit
- Nissan NV200
- Chevy City Express
- Mercedes Sprinter 3500
- Ford F150

TIRE SIZE	PR	LI/SR (SINGLE/DUAL)	LOAD RANGE	WEIGHT (LBS)	MEASURING RIM WIDTH (IN)	APPROVED RIM WIDTH (MIN-MAX)	MAX PRESSURE (PSI)	MAX LOAD SINGLE/DUAL (LBS)	OVERALL DIAMETER (IN)	SECTION WIDTH (IN)	TREAD DEPTH (32ND)	TREAD CONSTRUCTION
185/60R15C	6PR	94/92T	C	26	5.5	5.5 - 6.0	54	1477/1389	23.7	7.4	13	1N+2S+2P
195/75R16C	8PR	107/105R	D	30	5.5	5.0 - 6.0	69	2150/2040	27.5	7.7	13	1N+2S+2P
205/75R16C	10PR	113/111R	E	28	5.5	5.5 - 6.5	76	2535/2405	28.1	8.0	13	1N+2S+2P
225/75R16C	10PR	121/120R	E	35	6.0	6.0 - 7.0	83	3195/3085	29.3	8.8	13	1N+2S+2P
235/65R16C	10PR	121/119R	E	34	7.0	6.5 - 7.5	80	3195/3000	28.0	9.3	13	1N+2S+2P
LT215/85R16	10PR	115/112R	E	36	6.0	5.5 - 7.0	80	2680/2470	30.4	8.5	13	1N+2S+2P
LT235/85R16	10PR	120/116R	E	40	6.5	6.0 - 7.5	80	3042/2778	31.7	9.3	13	1N+2S+2P
LT225/75R16	10PR	115/112R	E	35	6.0	6.0 - 7.5	80	2680/2470	29.3	8.8	13	1N+2S+2P
LT245/75R16	10PR	120/116S	E	39	7.0	6.5 - 8.0	80	3042/2778	30.5	9.8	13	1N+2S+2P
LT265/75R16	10PR	123/120R	E	41	7.5	7.0 - 9.0	80	3415/3085	31.7	10.5	15	1N+2S+2P
LT235/80R17	10PR	120/117R	E	41	6.5	6.0 - 7.5	80	3085/2835	31.8	9.3	13	1N+2S+2P
LT245/75R17	10PR	121/118S	E	42	7.0	6.5 - 8.0	80	3195/2910	31.5	9.8	13	1N+2S+2P
LT245/70R17	10PR	119/116S	E	41	7.0	6.5 - 8.0	80	3000/2755	30.6	9.8	13	1N+2S+2P
LT265/70R17	10PR	123/120R	E	42	8.0	7.0 - 9.0	80	3415/3085	31.7	10.7	15	1N+2S+2P
LT275/70R18	10PR	125/122S	E	49	8.0	7.0 - 9.0	80	3640/3305	33.2	11.0	15	1N+2S+2P
LT275/65R18	10PR	123/120R	E	46	8.0	8.0 - 9.5	80	3415/3085	32.1	11.0	15	1N+2S+2P



ST RADIAL ST01

SPECIALTY TRAILER



EXPECT MORE

FEATURES & BENEFITS:

- Continuous center rib for stability and tracking
- Strengthened sidewall construction for improved load capability and durability against curb damage
- Nylon spiral wrap for improved uniformity and protection against heat buildup

FITS

For Trailer Use Only

POPULAR FITMENTS

- Boat Trailers
- Horse Trailers
- Campers
- Toy Haulers
- Landscape Trailers

- Strengthened Sidewall

TIRE SIZE	PR	LI/SR (SINGLE/DUAL)	LOAD RANGE	WEIGHT (LBS)	MEASURING RIM WIDTH (IN)	APPROVED RIM WIDTH (MIN-MAX)	MAX PRESSURE (PSI)	MAX LOAD SINGLE/DUAL (LBS)	OVERALL DIAMETER (IN)	SECTION WIDTH (IN)	TREAD DEPTH (32ND)	TREAD CONSTRUCTION
ST175/80R13	8PR	97/93L	D	16	5.0	4.5 - 5.5	65	1609/1433	24.0	7.0	8	2P+2S+1N
ST205/75R14	8PR	105/101M	D	21	5.5	5.0 - 6.5	65	2040/1820	26.2	8.0	8	2P+2S+1N
ST215/75R14	8PR	108/103L	D	22	6.0	5.5 - 7.0	65	2205/1929	26.7	8.5	8	2P+2S+1N
ST205/75R15	6PR	101/97M	C	21	5.5	5.0 - 6.5	50	1820/1610	27.1	8.0	8	2P+2S+1N
ST205/75R15	8PR	107/102M	D	21	5.5	5.0 - 6.5	65	2040/1820	26.2	8.0	8	2P+2S+1N
ST225/75R15	8PR	113/108M	D	26	6.0	6.5 - 7.0	65	2540/2200	28.3	8.8	9	2P+2S+1N
ST225/75R15	10PR	117/112M	E	27	6.0	6.5 - 7.0	80	2830/2470	28.3	8.8	9	2P+2S+1N
ST235/80R16	10PR	124/120M	E	32	6.5	6.0 - 7.5	80	3520/3080	30.8	9.3	9	2P+2S+1N
ST235/85R16	10PR	125/121M	E	35	6.5	6.0 - 7.5	80	3640/3200	31.8	9.3	9	2P+2S+1N

If an unexpected tire failure happens, your customers are protected with a Premium Tire Roadside Assistance Program with the purchase of the Fortune ST01 or Fortune FST02 Tires. Counter-top cards will be made available at tire purchase to assist your customer in utilizing this program.

WARRANTY INFO

24/7 Roadside Assistance



What to expect: Your customer simply calls our toll-free Roadside Assistance number and a qualified service provider will replace the damaged tire with an inflated spare.

If the customer does not carry an inflated spare, and a tow or other services are necessary, a towing service (up to \$100 of service) will be provided to the nearest qualified repair facility.

The customer will be solely responsible for any charges incurred above the \$100 benefit limit.



ST RADIAL FST02

ALL-STEEL SPECIALTY TRAILER



**EXPECT
MORE**



TIRE SIZE	PR	LOAD RANGE	LOAD SPEED INDEX	TREAD DEPTH (32ND)	MAX LOAD SINGLE (LBS)	MAX PRESSURE SINGLE (PSI)	MAX LOAD DUAL (LBS)	MAX PRESSURE DUAL (PSI)	APPROVED RIM WIDTH	O.D. (IN)	S.W. (IN)	REVS/ MILE	WEIGHT (LBS)	TREAD CONSTRUCTION
ST225/90R16	14PR	G	129/125L	13	4080	110	3640	110	6.5, 7.0	31.8	8.7	653	58	1S+3S
ST235/85R16	14PR	G	132/127L	12	4400	110	3860	110	6.0, 7.0, 7.5	31.8	9.3	655	60	1S+3S
ST235/80R16	14PR	G	129/125L	12	4080	110	3640	110	6.0, 7.0, 7.5	30.8	9.3	675	59	1S+3S

Optimized Footprint
And Compound

Heavy Duty All-Steel
Construction

Unique Sipe
Distribution



FEATURES & BENEFITS:

- All-steel specialty tire designed specifically for trailers that demand increased load-bearing capacity and outstanding durability
- Unique sipe distribution offers good tire traction, handling and safety
- New polybutadiene rubber and optimized footprint shape ensures excellent wear-resistant performance
- Provides resistance to stone drilling
- For trailer use only

WARRANTY INFO

24/7 Roadside Assistance



In the event of an unexpected flat tire, our **Roadside Tire Assistance** will replace your customer's damaged tire or tow them to the nearest qualified repair facility.



WARRANTY

INFORMATION

2025 Limited Passenger Car and Light Truck Tire Warranty for USA and Canada

Effective January 1, 2025, this warranty governs tires purchased from that date onward. Tires obtained before January 1, 2025, fall under the terms of the previous warranty. All warranty claims for Fortune Tires must be processed through the original seller or an authorized Fortune Tires dealer.

ELIGIBILITY

YOU ARE COVERED UNDER THE TERMS OF THIS LIMITED WARRANTY IF:

- You are the original purchaser of new FORTUNE brand Passenger Car, Light Truck, or ST01 and FST02 ST Radial Tires and
- Your tires bare Department of Transportation prescribed tire identification numbers and are not branded "N/A" (Not Adjustable), or "Blem" (Blemish) and
- Your FORTUNE brand Passenger Car, Light Truck, or ST01 and FST02 ST Radial Tires have been used only on the vehicle on which they were originally installed according to the vehicle or tire manufacturer's recommendations and
- Your FORTUNE brand Passenger Car, Light Truck, or ST01 and FST02 ST Radial Tires were purchased from an authorized FORTUNE tire dealer as determined by Prinx Chengshan Tire North America. Please note that sellers on online marketplaces such as Amazon.com, Walmart.com, eBay.com, PriorityTires.com, SimpleTire.com are not authorized dealers of FORTUNE brand tires.

WHAT IS COVERED AND FOR HOW LONG?

NO-CHARGE REPLACEMENT

FORTUNE tires covered by this warranty that become unserviceable due to a Road Hazard, or a defect in workmanship or material during the first 2/32nds of usable tread depth will be replaced with a comparable new FORTUNE tire without charge. The cost of any other service charges, including mounting and balancing, alignment, disposal fees or applicable taxes are payable by you.

PRORATED REPLACEMENT

Tires worn beyond the first 2/32nds of usable tread that become unserviceable due to defects in workmanship or material will be replaced on a prorated basis. You are responsible for the cost of mounting and balancing, along with other service charges, disposal fees, or applicable taxes.

HOW PRORATED CHARGES ARE CALCULATED

The replacement price is determined by multiplying the dealer's current FORTUNE replacement tire price by the percentage of tread worn from the original tread. Additionally, you are responsible for covering the expenses related to mounting, balancing, and other service charges, disposal fees, or applicable taxes.

WHAT IS A COMPARABLE TIRE?

A "comparable" new FORTUNE tire may either be the same line of tire or, if the tire is not available, a tire of the same basic construction and quality with a different sidewall or tread design. If a higher-priced tire is accepted as replacement, the difference in price will be at an additional charge to you. Any replacement tire provided pursuant to this warranty will be covered by the FORTUNE passenger car and light truck warranty in effect at the time of replacement.

WHAT IS NOT COVERED BY THIS WARRANTY?

- Tires branded or marked "Non-adjustable (N/A)", or "Blemished (Blem)", or previously adjusted.
- Irregular wear or tire damage due to:
 - a. Road hazards (including punctures, cuts, snags, impact breaks, etc.) after the first 2/32nds.
 - b. Wreck, collision, fire, or vandalism.
 - c. Improper inflation, overloading, misapplication, misuse, negligence, high-speed tire spinning, chain damage, improper mounting or demounting.
 - d. Mechanical condition of the vehicle, including misalignment, wheel imbalance, faulty shocks or brakes.
- Ride disturbance after the first 1/32nd (0.8mm) of tread depth or due to damaged wheels. "Ride disturbance" means shakes and



bounces of vehicle caused by unbalanced tire-rim-assembly, out of round tires, etc., which bring unpleasant feelings or experience to drivers or passengers. Ride disturbance claims will also not be accepted on 3 or more tires from the same vehicle.

- Cost of mounting and balancing.
- Ozone or weather cracking on tires over four (4) years from the date of manufacture.
- Alteration of the tire or addition of alien material or transfer from one vehicle to another.
- Loss of time or use inconvenience, or any incidental or consequential damages.
- Tires used in commercial service unless denoted for such use as by the manufacturer.
- Tires used in racing or competitive related events.
- Tires used outside the United States and/or Canada.
- Tires purchased from unauthorized dealers.

WHEN DOES THE WARRANTY END?

When a FORTUNE brand Passenger Car or Light Truck Tire has delivered its full original tread life down to 2/32nds (1.6mm) remaining at any given spot in the tread area, or five (5) years from the new tire purchase date or seven (7) years from the date of original tire manufacture, whichever comes first. For ST Trailer tires, the warranty ends after the tire has delivered its full original tread life down to 2/32nds (1.6mm) remaining at any given spot in the tread area, or three (3) years from tire purchase date or five (5) years from the date of manufacturer, whichever comes first.

PASSENGER/LT LIMITED MILEAGE WARRANTIES

Failure to rotate tires every 5,000 miles or according to the vehicle manufacturers instructions voids the treadwear warranty. If tires on a vehicle are different sizes for the front and rear, thus preventing proper rotation, then the mileage warranty will be for half of the warranties stated. Tires used in commercial service have no mileage warranty.

TIRE NAME	MILES	KMs
FORTUNE CLIMAFLEX 4S	70,000	110,000
FORTUNE VIENTO	50,000	80,000
FORTUNE PERFECTUS	60,000	95,000
FORTUNE TORMENTA H/T	60,000 Metric / 45,000 LT	95,000 Metric / 70,000 LT
FORTUNE TORMENTA A/T	50,000 Metric / 45,000 LT	80,000 Metric / 70,000 LT
FORTUNE TORMENTA A/T ²	50,000	80,000
FORTUNE TORMENTA R/T	50,000	80,000

DISCLAIMER

This warranty or any warranty stated or referred to herein, is exclusive and in lieu of any other warranty regarding the quality of FORTUNE brand tires, whether expressed or implied, and remedies for breach thereof shall be limited to those specifically provided herein. To the extent permitted by law, Prinx Chengshan Tire Co. Ltd cannot be held responsible for incidental and consequential damages, loss of time, loss of vehicle use, or inconvenience. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you. This Limited Warranty applies only to consumers actually purchasing and using the tire in the United States and Canada. Obligations under this policy may not be enlarged or altered by anyone. In accordance with federal law, this Limited Warranty has been designated as a "Limited Warranty". Nothing in this Limited Warranty is intended to be a representation that tire failures cannot occur.

This Limited Warranty is effective as of January 1, 2025 and replaces any previous limited warranties. Conditions and coverage are subject to change at any time without prior notice.

CAR TIRE WARNINGS!

IMPORTANT: Be sure to read this safety information. Make sure that everyone who services tires or vehicles in your outlet has read and understands these warnings. **SERIOUS INJURY OR DEATH CAN RESULT FROM FAILURE TO FOLLOW SAFETY WARNINGS.**

No matter how well any tire is constructed, punctures, impact damage, improper inflation, improper maintenance or service factors may cause serious tire failure creating a risk of property damage and serious or fatal injury to you and/or your customer.

Encourage your customers to examine their tires frequently for snags, bulges, excessive treadwear, separations or cuts. If such conditions appear, advise them to demount the tire, use the spare and see you immediately. If you spot any of the above conditions bring them to the customer's attention immediately. For safety, comply with the following warnings.

Tire and rim servicing can be dangerous and must be done only by trained personnel using proper tools and procedures. Failure to read and comply with all procedures may result in serious injury or death to you or others.

Reinflation of any type of tire/rim assembly that has been operated in a run-flat or underinflated condition (80% or less of recommended pressure) can result in serious injury or death. The tire may be damaged on the inside and can explode while you are adding air. The rim parts may be worn, damaged or dislodged and can explosively separate.

Use of starting fluid, ether, gasoline, or any other flammable material to lubricate, seal or seat the beads of a tubeless tire can cause the tire to explode or can cause the explosive separation of the tire/rim assembly resulting in serious injury or death. The use of any flammable material during tire servicing is absolutely prohibited.

Any inflated tire mounted on a rim contains explosive energy. The use of damaged, mismatched or improperly assembled tire/rim parts can cause the assembly to burst apart with explosive force. If you are struck by an exploding tire, rim part or the air blast, you can be seriously injured or killed.

Re-assembly and the inflation of mismatched parts can result in serious injury or death. Just because parts come in together does not mean that they belong together. Check for proper matching on all rim parts before putting any parts together.

Mismatching tire and rim diameters is dangerous. A mismatched tire and rim assembly may explode and can result in serious injury or death. This warning applies to 14", 14.5", 16" and 16.5" tires and rims as well as other similarly mismatched size combinations. Never assemble a tire and rim unless you have positively identified and correctly matched the parts.

If the tire is 20% below the recommended operating pressure, it must be considered flat. The tire must be removed, dismounted, and inspected for punctures or other damage.

MOUNTING AND DEMOUNTING

A tire cannot perform properly unless it is mounted properly on the correct size rim or wheel. The following are general instructions for demounting and mounting tube-type and tubeless tires. For detailed instructions on mounting and demounting truck tires on particular types of rims and wheels, refer to the instructions of the rim and wheel manufacturer or the US Tire Manufacturers Association (USTMA) wall charts.

1. SELECTION OF PROPER COMPONENTS AND MATERIALS:

- All tires must be mounted with the proper tube and flap (if required) and rim or wheel as indicated in the application data books.
- Make certain that rim/wheel components are properly matched and of the correct dimensions for the tire.
- Always fit new tube in a new mounting. Since the tube will exhibit growth in size through normal use, an old tube used in a new mounting increases the possibility of tube creasing and chafing, possibly resulting in failure.
- Always install a new flap in a new mounting. A flap through extended use becomes hard and brittle. After limited time, it will develop a set to match the tire and rim in which it is fitted. Therefore, it will not exactly match a tire/rim combination.
- Always install new valve cores, and metal or hard plastic valve caps containing plastic or rubber seals. On tubeless truck tire valve stems, replace the rubber grommet. For tires requiring 'O' Rings, be sure to install a new one at every tire change.
- Always use a safety device such as an inflation cage or other OSHA-approved device when inflating. Never stand over the tire or in front of a tire when inflating. Always use a clip-on valve chuck with hose extension and stand to the side when inflating.

2. TIRE AND RIM LUBRICATION:

It is essential that an approved vegetable oil base soap solution tire lubricant be used for mounting tubeless and tube-type tires. The lubricant serves the following purposes:

- Minimizes the possibility of damage to the tire beads from the mounting tools.
- Eases the insertion of the tire onto the rim by lubricating all contacting surfaces.
- Assists proper bead seating (tire/rim centering) and helps prevent eccentric mountings.
 - a. TUBELESS TIRES—Apply lubricant to all surfaces of the bead area of the tire. When applying lubricant to the rim, lubricate the entire rim surface from flange to flange.
 - b. TUBE-TYPE TIRES—Apply clean lubricant to all portions of the tire bead area and the exposed portion of the flap using sufficient but sparing quantities of lubricant. Also lubricate the entire rim surface. Avoid using excessive amounts of lubricant which can become trapped between the tire and tube can, resulting in tube damage and rapid air loss.



TIRE SAFETY

INFORMATION



CAR TIRE WARNINGS!

CAUTION: It is important that tire lubricant be clean and free of dirt, sand, metal shavings or other hard particles. The particles may lodge between the tube and the flap edges, resulting in splits in the tube. The following practice is recommended:

- Use a fresh supply of tire lubricant each day, drawing from a clean supply and placing the lubricant in a clean portable container.
- Provide a cover for the portable container and/or other means to prevent contamination of the lubricant when not in use.

The following method is suggested, which has proven to be successful in minimizing contamination and preventing excess lubricant from entering the tire casing: Provide a special cover for the portable container that has a funnel-like device attached. The small opening of the funnel should be sized so that when a swab is inserted through the opening into the reserve of lubricant and then withdrawn, the swab is compressed, removing excess lubricant. This allows the cover to be left in place, providing added protection. A mesh false bottom in the container is a further safeguard against contaminants. The tire should be mounted and inflated promptly before lubricant dries.

1. PREPARATION OF WHEELS, RIMS, AND TIRES:

Never weld or apply heat to a rim or wheel on which a tire is mounted.

- Always wear safety goggles or face shields when buffing or grinding rims or wheels.
- Inspect wheel/rim assemblies for cracks, distortion, deforming of flanges, side rings, lock rings, etc. Using a file and/or emery cloth, smooth all burrs, welds, dents, etc. that are present on the tire side of the rim. Inspect the condition of bolt holes on the wheels.
- Remove rust with a wire brush and apply rust inhibiting paint.
- Remove any accumulation of rubber or grease which might be stuck to the tire, being careful not to damage it. Wipe the beads down with a dry rag.
- Make sure there is no water, dirt or foreign material inside the tire before inserting the tube.

BEFORE SERVICING ANY TIRE RIM/WHEEL ASSEMBLY

- ALWAYS comply with the procedures in the tire/wheel manufacturer's catalogs, instruction manuals or other industry and government instructional materials.
- Before loosening any nuts or clamps that attach a tubetype tire/rim assembly to a vehicle, ALWAYS completely deflate the tire (or both tires of a dual assembly) by taking out the valve core(s).
- Use a non-flammable vegetable or soap-based rubber lubricant on the beads and rim surfaces to make tire demounting and mounting easier.
- Use proper tools to demount or mount tires and rims (refer to "Typical Tire Service Tools"). NEVER use a steel hammer to seat rim components—use only rubber, plastic or brass-tipped mallets. Striking a rim/wheel assembly with a hard-faced hammer can damage the components and endanger the installer. Use a steel duck bill hammer only as a wedge to unseat the beads of tube-type tires. NEVER strike the tire/wheel assembly with a steel duck bill hammer to unseat the beads and do not strike the head of the duck bill hammer with another hard-faced hammer—use a rubber mallet or plastic dead blow hammer. Slide impact tools and hydraulic bead unseating tools can also be used to unseat beads on tube-type tires.
- NEVER reinflate any tire that has been operated in a run-flat or underinflated condition (i.e., operated at 80% or less of recommended operating pressure). Demount, inspect and match all tire and rim components before reinflating in a restraining device with the valve core removed.

INFLATING TIRE RIM/WHEEL ASSEMBLY

TIRE AND RIM SERVICING CAN BE DANGEROUS AND MUST ONLY BE PERFORMED BY TRAINED PERSONNEL USING PROPER PROCEDURES AND TOOLS. FAILURE TO READ AND COMPLY WITH ALL OF THESE PROCEDURES MAY RESULT IN SERIOUS INJURY OR DEATH TO YOU AND OTHERS.

- NEVER use starter fluid, ether, gasoline, or other flammable materials and/or accelerants to lubricate or to seat the beads of a tire. This practice can cause the explosive separation of the tire/wheel during servicing or during highway use, which may result in serious injury or death.
- ALWAYS inflate the tire rim/wheel assembly in a restraining device with the valve core removed. The air line assembly must consist of the following components: a clip-on air chuck, an in-line valve with a pressure gauge or preset table regulator, and sufficient hose length to keep the technician outside the trajectory during inflation. (See "Trajectory" WARNING below.) DO NOT rest or lean any part of your body against the restraining device during inflation. Failure to use a restraining device when inflating a tire rim/wheel assembly is not only a violation of OSHA regulation 1910.177, but also a DANGEROUS PRACTICE that may result in serious injury or death. During inflation, if ANY sidewall undulations or bulges appear or if ANY snapping, cracking or popping noises occur—STOP! DO NOT approach tire. Before removing from restraining device, completely deflate tire remotely. Remove clip-on air chuck. Mark tire as damaged for potential "zipper rupture." Render tire unserviceable, non-repairable and scrap.
- NEVER inflate beyond 40 psi to seat any tire beads. NEVER stand, lean, or reach over the tire rim/wheel assembly in the restraining device during inflation. Even if a tire is in a restraining device, inflating beyond 40 psi when trying to seat the beads is a DANGEROUS PRACTICE that may break a tire bead or the rim/wheel with explosive force and possibly result in serious injury or death. Demount, inspect and match all tire and rim components before reinflating in a restraining device with the valve core removed.



MORE PERFORMANCE
MORE SAFETY
MORE TIRE



TIRE INFORMATION

SERVICE BULLETIN

TIRES ON CERTAIN GLOBALIZED (“EURO”) VANS

There has been an increase in the variety of vans sold in the North American market that are based on platforms used around the world by vehicle manufacturers. These vans are commonly used in commercial service and come in various sizes and configurations with efficiency and cargo flexibility in mind.

This Tire Information Service Bulletin is a reminder about proper tire replacement guidelines, particularly as it applies to globalized (“Euro”) vans and the differences in tire size designations that may be applied to them.

NOTE

Before replacing tires, always refer to and follow the vehicle manufacturer’s tire replacement recommendations and restrictions.

Like all other vehicles, when considering tire replacement for Euro vans, carefully determine the tire size designation for the original equipment tires and the recommended replacement tires as specified on the vehicle tire placard, certification label or in the vehicle owner’s manual. Depending on the van and its configuration, it may be equipped with P-Metric, LT-Metric, European Metric (Passenger) or European Commercial Metric tires.

Figures 1 and 2 are examples of placards from one of these increasingly popular model vans. These placards show that European C-Type tires are specified (note the “C” at the end of the tire size code).



FIGURE 1 (Above): Example Vehicle Certification Label

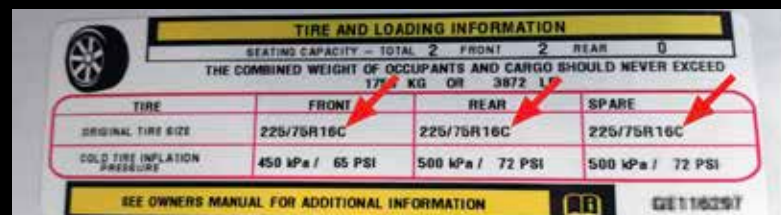


FIGURE 2 (Right): Example Vehicle Tire Placard



Tires with different size designations may not be interchangeable even if they have similar dimensions. For example, an LT-metric tire may not be a suitable replacement for a C-Type European Commercial Metric tire, even if the tires have similar section width, aspect ratio and rim codes. Such tires typically have significantly different load carrying capacities. In other words: An LT225/75R16 is not the same as a 225/75R16C.

TIRE TYPE	SIZE CODE	LOAD INDEX AND SPEED SYMBOL	LOAD IDENTIFICATION	MAXIMUM LOAD CAPACITY AT RATED PRESSURE	
P-Metric (Passenger)	P225/75R16	104T	Standard Load	900 kg	240 kPa
European Metric (Passenger)	225/75R16	104T	Standard Load	900 kg	250 kPa
LT-Metric (Light Truck)	LT225/75R16	115/112R	Load Range E	1215/1120 kg	550 kPa
C-Type European Commercial Metric	225/75R16C	121/120R	Load Range E	1450/1400 kg	575 kPa

NOTE

The “C” at the end of the size designation in Figure 3 below identifies the tire as a C-Type European Commercial Metric tire. The “C” is not a load range. The load range is marked separately on the tire sidewall as shown in Figure 4.



FIGURE 3: Size and Service Description of an Example C-Type European Commercial Metric Tire

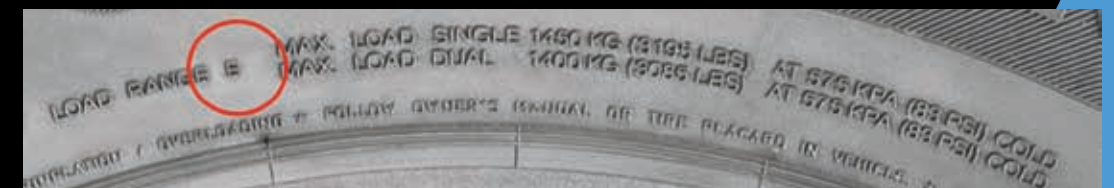


FIGURE 4: Load Range, Max Load and Pressure Specifications for the Example Tire Shown in Figure 3

GROW YOUR BUSINESS BY EXPECTING MORE

We provide your customers the easiest ways to purchase Fortune Tires at a location convenient to them. Whether you buy direct from us, or from a distributor around the country, signing up for our retailer locator page is the best way we can refer new customers to you for their next purchase! Scan the QR code to sign up today or contact your sales rep.

BENEFITS OF PARTICIPATING IN THE FORTUNE TIRES RETAILER LOCATOR:

INCREASED VISIBILITY:

- Enhances online presence, making you easily discoverable by potential customers.

CUSTOMER CONVENIENCE:

- Enables customers to find the nearest tire retailer effortlessly.

COMPETITIVE ADVANTAGE:

- Makes you stand out among competitors by being featured on a trusted and widely used page.

IMPROVED SEO AND ONLINE RANKINGS:

- Improves online visibility, making you more likely to appear in local search results.

INCREASED FOOT TRAFFIC:

- Encourages more customers to visit your store, leading to increased foot traffic and potential sales.

ENHANCED MARKETING OPPORTUNITIES:

- Provides an additional avenue for targeted marketing to potential customers seeking tire-related services.

SCAN TO JOIN OUR
RETAILER LOCATOR



SIGN UP TODAY [FORTUNETIREUSA.COM/SIGN-UP](https://www.fortunetireusa.com/sign-up)

PICKLEBALL UNITES

ALLOF

US

EXPECT MORE FUN


AS AN EMERGING BRAND, WE'VE BECOME THE OFFICIAL TIRE PARTNER OF USA PICKLEBALL™.

We're the Official Tire Partner of USA Pickleball™. With over *35 million people playing in the US, we're using this sponsorship to generate brand awareness and to reach as many of your customers as possible. This way, the next time they need to purchase tires, they'll know to EXPECT MORE from Fortune Tires. As a Fortune Tire distributor or retailer, becoming part of the Retailer Locator page is such a key element so we can direct these future customers right to you!

In addition, we have started the Team Drive Athlete Program. By partnering with pickleball athletes, we can bring the two worlds together: A sport for everyone and tires for everyone. We do this with the athletes who encourage others to follow our social platforms, attend our pickleball events and find our high-quality tires on our locator page.

We look forward to partnering with you at any event or hosting a private clinic for you and your team. If interested, please contact us at: marketing@fortunetireusa.com.

**stats based on 2022 data*

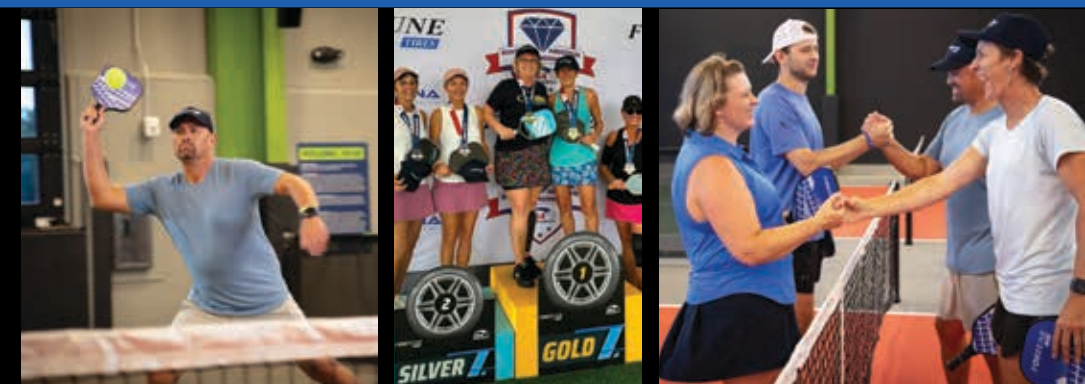

WATCH OUR VIDEO

Follow Us On Social    
TO KEEP UP WITH EXCITING PICKLEBALL CONTENT

Official tire partner of: 

FORTUNE
TIRES

**EXPECT
MORE™**

Prinx Chengshan Tire North America
100 North Barranca Street
Suite 1000
West Covina, CA 91791



Scan To See Our
Full Product Lineup
[fortunetireusa.com](https://www.fortunetireusa.com)



Follow Us On Social
[@fortunetiresusa](https://www.instagram.com/fortunetiresusa)

FPLTC - 0125